



CompTIA

Exam Questions N10-008

CompTIA Network+Exam

NEW QUESTION 1

- (Topic 1)

Which of the following would need to be configured to ensure a device with a specific MAC address is always assigned the same IP address from DHCP?

- A. Scope options
- B. Reservation
- C. Dynamic assignment
- D. Exclusion
- E. Static assignment

Answer: B

Explanation:

A reservation should be configured to ensure a device with a specific MAC address is always assigned the same IP address from DHCP. A reservation is a feature of DHCP that allows an administrator to assign a fixed IP address to a device based on its MAC address. This way, the device will always receive the same IP address from the DHCP server, even if it is powered off or disconnected from the network for a long time. References: <https://docs.microsoft.com/en-us/windows-server/troubleshoot/configure-dhcp-reservations>

NEW QUESTION 2

- (Topic 1)

A store owner would like to have secure wireless access available for both business equipment and patron use. Which of the following features should be configured to allow different wireless access through the same equipment?

- A. MIMO
- B. TKIP
- C. LTE
- D. SSID

Answer: D

Explanation:

SSID (Service Set Identifier) is a feature that should be configured to allow different wireless access through the same equipment. SSID is the name of a wireless network that identifies it from other networks in the same area. A wireless access point (AP) can support multiple SSIDs with different security settings and network policies. For example, a store owner can create one SSID for business equipment and another SSID for patron use, and assign different passwords, VLANs, and QoS levels for each SSID. References: <https://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/70931-multiple-ssid.html>

NEW QUESTION 3

- (Topic 1)

A network administrator is installing a wireless network at a client's office. Which of the following IEEE 802.11 standards would be BEST to use for multiple simultaneous client access?

- A. CDMA
- B. CSMA/CD
- C. CSMA/CA
- D. GSM

Answer: C

Explanation:

CSMA/CA (Carrier Sense Multiple Access with Collision Avoidance) is an IEEE 802.11 standard that would be best to use for multiple simultaneous client access on a wireless network. CSMA/CA is a media access control method that allows multiple devices to share the same wireless channel without causing collisions or interference. It works by having each device sense the channel before transmitting data and waiting for an acknowledgment from the receiver after each transmission. If the channel is busy or no acknowledgment is received, the device will back off and retry later with a random delay. References: <https://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/82068-csma-ca.html>

NEW QUESTION 4

- (Topic 1)

Which of the following BEST describes a network appliance that warns of unapproved devices that are accessing the network?

- A. Firewall
- B. AP
- C. Proxy server
- D. IDS

Answer: D

Explanation:

IDS stands for intrusion detection system, which is a network appliance that monitors network traffic and alerts administrators of any suspicious or malicious activity. An IDS can warn of unapproved devices that are accessing the network by detecting anomalies, signatures, or behaviors that indicate unauthorized access attempts or attacks. References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), <https://www.cisco.com/c/en/us/products/security/what-is-an-intrusion-detection-system-ids.html>

NEW QUESTION 5

- (Topic 1)

A technician receives feedback that some users are experiencing high amounts of jitter while using the wireless network. While troubleshooting the network, the technician uses the ping command with the IP address of the default gateway and verifies large variations in latency. The technician thinks the issue may be interference from other networks and non-802.11 devices. Which of the following tools should the technician use to troubleshoot the issue?

- A. NetFlow analyzer
- B. Bandwidth analyzer
- C. Protocol analyzer
- D. Spectrum analyzer

Answer: D

Explanation:

A spectrum analyzer is a tool that measures the frequency and amplitude of signals in a wireless network. It can be used to troubleshoot issues related to interference from other networks and non-802.11 devices, such as microwave ovens or cordless phones, by identifying the sources and levels of interference in the wireless spectrum. A spectrum analyzer can also help to optimize the channel selection and placement of wireless access points. References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), <https://www.flukenetworks.com/blog/cabling-chronicles/what-spectrum-analyzer-and-how-do-you-use-it>

NEW QUESTION 6

- (Topic 1)

A technician is troubleshooting a network switch that seems to stop responding to requests intermittently whenever the logging level is set for debugging. Which of the following metrics should the technician check to begin troubleshooting the issue?

- A. Audit logs
- B. CPU utilization
- C. CRC errors
- D. Jitter

Answer: B

Explanation:

CPU utilization is a metric that measures the percentage of time a CPU spends executing instructions. When the logging level is set for debugging, the router may generate a large amount of logging data, which can increase CPU utilization and cause the router to stop responding to requests intermittently. References: ? Network+ N10-008 Objectives: 2.1 Given a scenario, troubleshoot common physical connectivity issues.

NEW QUESTION 7

- (Topic 1)

A network engineer is investigating reports of poor network performance. Upon reviewing a device configuration, the engineer finds that duplex settings are mismatched on both ends. Which of the following would be the MOST likely result of this finding?

- A. Increased CRC errors
- B. Increased giants and runts
- C. Increased switching loops
- D. Increased device temperature

Answer: A

Explanation:

Mismatched duplex settings can cause an increase in CRC errors, which are errors in data transmission that can result in corrupted data. References: CompTIA Network+ Certification Study Guide, Chapter 4: Infrastructure.

NEW QUESTION 8

- (Topic 1)

A technician is deploying a new switch model and would like to add it to the existing network monitoring software. The technician wants to know what metrics can be gathered from a given switch. Which of the following should the technician utilize for the switch?

- A. MIB
- B. Trap
- C. Syslog
- D. Audit log

Answer: A

Explanation:

To determine what metrics can be gathered from a given switch, a technician should utilize the Management Information Base (MIB). The MIB is a database of network management information that is used to manage and monitor network devices. It contains information about device configuration, status, and performance. References: Network+ Certification Study Guide, Chapter 5: Network Security

NEW QUESTION 9

- (Topic 1)

A technician is connecting multiple switches to create a large network for a new office. The switches are unmanaged Layer 2 switches with multiple connections between each pair. The network is experiencing an extreme amount of latency. Which of the following is MOST likely occurring?

- A. Ethernet collisions
- B. A DDoS attack
- C. A broadcast storm
- D. Routing loops

Answer: C

Explanation:

A broadcast storm is most likely occurring when connecting multiple unmanaged Layer 2 switches with multiple connections between each pair. A broadcast storm

is a situation where broadcast packets flood a network segment and consume all the available bandwidth. It can be caused by loops in the network topology, where broadcast packets are endlessly forwarded by switches without any loop prevention mechanism. Unmanaged switches do not support features such as Spanning Tree Protocol (STP) or Rapid Spanning Tree Protocol (RSTP) that can detect and block loops. References: <https://www.cisco.com/c/en/us/support/docs/lan-switching/spanning-tree-protocol/10556-16.html>

NEW QUESTION 10

- (Topic 1)

The following configuration is applied to a DHCP server connected to a VPN concentrator:

```
IP address:      10.0.0.1
Subnet mask:     255.255.255.0
Gateway:        10.0.0.254
```

There are 300 non-concurrent sales representatives who log in for one hour a day to upload reports, and 252 of these representatives are able to connect to the VPN without any issues. The remaining sales representatives cannot connect to the VPN over the course of the day. Which of the following can be done to resolve the issue without utilizing additional resources?

- A. Decrease the lease duration
- B. Reboot the DHCP server
- C. Install a new VPN concentrator
- D. Configure a new router

Answer: A

Explanation:

Decreasing the lease duration on the DHCP server will cause clients to renew their IP address leases more frequently, freeing up IP addresses for other clients to use. References: CompTIA Network+ Certification Study Guide, Chapter 3: IP Addressing.

NEW QUESTION 10

- (Topic 1)

A network administrator discovers that users in an adjacent building are connecting to the company's guest wireless network to download inappropriate material. Which of the following can the administrator do to MOST easily mitigate this issue?

- A. Reduce the wireless power levels
- B. Adjust the wireless channels
- C. Enable wireless client isolation
- D. Enable wireless port security

Answer: A

Explanation:

Reducing the wireless power levels can limit the range of the guest wireless network and prevent users in an adjacent building from connecting to it. Adjusting the wireless channels or enabling wireless client isolation will not affect the signal strength or coverage of the guest network. Enabling wireless port security will not work on a guest network that does not use authentication or MAC address filtering. References: CompTIA Network+ Certification Exam Objectives Version 2.0 (Exam Number: N10-006), Domain 2.0 Network Operations, Objective 2.5 Given a scenario, implement appropriate wireless configuration settings; Guest WiFi Security - Cisco Umbrella

NEW QUESTION 14

- (Topic 1)

A systems administrator needs to improve WiFi performance in a densely populated office tower and use the latest standard. There is a mix of devices that use 2.4 GHz and 5 GHz. Which of the following should the systems administrator select to meet this requirement?

- A. 802.11ac
- B. 802.11ax
- C. 802.11g
- D. 802.11n

Answer: B

Explanation:

802.11ax is the latest WiFi standard that improves WiFi performance in densely populated environments and supports both 2.4 GHz and 5 GHz bands. 802.11ac is the previous standard that only supports 5 GHz band. 802.11g and 802.11n are older standards that support 2.4 GHz band only or both bands respectively. References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), <https://www.techtarget.com/searchnetworking/tip/Whats-the-difference-between-80211ax-vs-80211ac>

NEW QUESTION 17

- (Topic 1)

Which of the following systems would MOST likely be found in a screened subnet?

- A. RADIUS
- B. FTP
- C. SQL
- D. LDAP

Answer: B

Explanation:

FTP (File Transfer Protocol) is a system that would most likely be found in a screened subnet. A screened subnet, or triple-homed firewall, is a network architecture where a single firewall is used with three network interfaces. It provides additional protection from outside cyber attacks by adding a perimeter network to isolate or separate the internal network from the public-facing internet¹. A screened subnet typically hosts systems that need to be accessed by both internal and external users, such as web servers, email servers, or FTP servers. References: <https://www.techtarget.com/searchsecurity/definition/screened-subnet#:~:text=A%20screened%20subnet%2C%20or%20triple-homed%20firewall%2C%20refers%20to,a%20perimeter%20network%20to%20isolate%20or%20separate%20the> 1

NEW QUESTION 20

- (Topic 1)

An attacker is attempting to find the password to a network by inputting common words and phrases in plaintext to the password prompt. Which of the following attack types BEST describes this action?

- A. Pass-the-hash attack
- B. Rainbow table attack
- C. Brute-force attack
- D. Dictionary attack

Answer: D

Explanation:

The attacker attempting to find the password to a network by inputting common words and phrases in plaintext to the password prompt is using a dictionary attack. References: CompTIA Network+ Certification Study Guide, Chapter 6: Network Attacks and Mitigation.

NEW QUESTION 21

- (Topic 1)

Which of the following factors should be considered when evaluating a firewall to protect a datacenter's east-west traffic?

- A. Replication traffic between an on-premises server and a remote backup facility
- B. Traffic between VMs running on different hosts
- C. Concurrent connections generated by Internet DDoS attacks
- D. VPN traffic from remote offices to the datacenter's VMs

Answer: B

Explanation:

When evaluating a firewall to protect a datacenter's east-west traffic, it is important to consider traffic between VMs running on different hosts. This type of traffic is referred to as east-west traffic and is often protected by internal firewalls. By implementing firewalls, an organization can protect their internal network against threats such as lateral movement, which can be caused by attackers who have breached a perimeter firewall. References: Network+ Certification Study Guide, Chapter 5: Network Security

NEW QUESTION 23

- (Topic 1)

A new cabling certification is being requested every time a network technician rebuilds one end of a Cat 6 (vendor-certified) cable to create a crossover connection that is used to connect switches. Which of the following would address this issue by allowing the use of the original cable?

- A. CSMA/CD
- B. LACP
- C. PoE+
- D. MDIX

Answer: D

Explanation:

MDIX (medium-dependent interface crossover) is a feature that allows network devices to automatically detect and configure the appropriate cabling type, eliminating the need for crossover cables. By enabling MDIX on the switches, a technician can use the original Cat 6 cable to create a crossover connection. References: CompTIA Network+ Certification Study Guide, Sixth Edition by Glen E. Clarke

NEW QUESTION 27

- (Topic 1)

A network administrator is designing a new datacenter in a different region that will need to communicate to the old datacenter with a secure connection. Which of the following access methods would provide the BEST security for this new datacenter?

- A. Virtual network computing
- B. Secure Socket Shell
- C. In-band connection
- D. Site-to-site VPN

Answer: D

Explanation:

Site-to-site VPN provides the best security for connecting a new datacenter to an old one because it creates a secure tunnel between the two locations, protecting data in transit. References: CompTIA Network+ Certification Study Guide, Chapter 5: Network Security.

NEW QUESTION 32

- (Topic 1)

Which of the following TCP ports is used by the Windows OS for file sharing?

- A. 53
- B. 389
- C. 445
- D. 1433

Answer: C

Explanation:

TCP port 445 is used by the Windows OS for file sharing. It is also known as SMB (Server Message Block) or CIFS (Common Internet File System) and allows users to access files, printers, and other shared resources on a network. References: <https://docs.microsoft.com/en-us/windows-server/storage/file-server/troubleshoot/detect-enable-and-disable-smbv1-v2-v3>

NEW QUESTION 34

- (Topic 1)

Given the following information:

Protocol	Local address	Foreign address	State
TCP	127.0.0.1:57779	Desktop-Open:57780	Established
TCP	127.0.0.1:57780	Desktop-Open:57779	Established

Which of the following command-line tools would generate this output?

- A. netstat
- B. arp
- C. dig
- D. tracert

Answer: D

Explanation:

Tracert is a command-line tool that traces the route of a packet from a source to a destination and displays the number of hops and the round-trip time for each hop. The output shown in the question is an example of a tracert output, which shows five hops with their IP addresses and hostnames (if available) and three latency measurements for each hop in milliseconds. References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), <https://www.lumen.com/help/en-us/network/traceroute/understanding-the-traceroute-output.html>

NEW QUESTION 38

- (Topic 1)

Which of the following can be used to centrally manage credentials for various types of administrative privileges on configured network devices?

- A. SSO
- B. TACACS+
- C. Zero Trust
- D. Separation of duties
- E. Multifactor authentication

Answer: B

Explanation:

TACACS+ (Terminal Access Controller Access Control System Plus) can be used to centrally manage credentials for various types of administrative privileges on configured network devices. This protocol separates authentication, authorization, and accounting (AAA) functions, providing more granular control over access to network resources.

References:

? Network+ N10-007 Certification Exam Objectives, Objective 4.2: Given a scenario, implement secure network administration principles.

NEW QUESTION 43

- (Topic 1)

An engineer notices some late collisions on a half-duplex link. The engineer verifies that the devices on both ends of the connection are configured for half duplex. Which of the following is the MOST likely cause of this issue?

- A. The link is improperly terminated
- B. One of the devices is misconfigured
- C. The cable length is excessive
- D. One of the devices has a hardware issue

Answer: C

Explanation:

In a half-duplex link, devices can only send or receive data at one time, not simultaneously. Late collisions occur when devices transmit data at the same time after waiting for a clear channel. One of the causes of late collisions is excessive cable length, which increases the propagation delay and makes it harder for devices to detect collisions. The link termination, device configuration, and device hardware are not likely to cause late collisions on a half-duplex link.

NEW QUESTION 46

- (Topic 1)

Which of the following routing protocols is used to exchange route information between public autonomous systems?

- A. OSPF
- B. BGP
- C. EGRIP

D. RIP

Answer: B

Explanation:

BGP (Border Gateway Protocol) is a routing protocol used to exchange route information between public autonomous systems (AS). OSPF (Open Shortest Path First), EGRIP (Enhanced Interior Gateway Routing Protocol), and RIP (Routing Information Protocol) are all used for internal routing within a single AS. Therefore, BGP is the correct option to choose for this question.

References:

? Network+ N10-007 Certification Exam Objectives, Objective 3.3: Given a scenario, configure and apply the appropriate routing protocol.

? Cisco: Border Gateway Protocol (BGP) Overview

NEW QUESTION 50

- (Topic 1)

A technician is configuring a network switch to be used in a publicly accessible location. Which of the following should the technician configure on the switch to prevent unintended connections?

- A. DHCP snooping
- B. Geofencing
- C. Port security
- D. Secure SNMP

Answer: C

Explanation:

Port security is a feature that restricts input to a switch port by limiting and identifying MAC addresses of the devices allowed to access the port. This prevents unintended connections from unauthorized devices or spoofed MAC addresses. Port security can also be configured to take actions such as shutting down the port or sending an alert when a violation occurs. References: [https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-\(2-0\)](https://partners.comptia.org/docs/default-source/resources/comptia-network-n10-008-exam-objectives-(2-0)), https://www.cisco.com/c/en/us/td/docs/switches/lan/catalyst9500/software/release/16-10/configuration_guide/sec/b_1610_sec_9500_cg/b_1610_sec_9500_cg_chapter_0101010.html

NEW QUESTION 53

- (Topic 1)

A network technician is installing new software on a Windows-based server in a different geographical location. Which of the following would be BEST for the technician to use to perform this task?

- A. RDP
- B. SSH
- C. FTP
- D. DNS

Answer: A

Explanation:

RDP (Remote Desktop Protocol) is the best option for a network technician to use when installing new software on a Windows-based server in a different geographical location. This protocol allows the technician to connect to the server remotely and control it as if they were physically present.

References:

? Network+ N10-007 Certification Exam Objectives, Objective 2.2: Given a scenario, implement the appropriate network-based security and troubleshoot common connectivity issues.

NEW QUESTION 54

- (Topic 1)

A network is experiencing a number of CRC errors during normal network communication. At which of the following layers of the OSI model will the administrator MOST likely start to troubleshoot?

- A. Layer 1
- B. Layer 2
- C. Layer 3
- D. Layer 4
- E. Layer 5
- F. Layer 6
- G. Layer 7

Answer: A

Explanation:

CRC errors are cyclic redundancy check errors that occur when data is corrupted during transmission. CRC errors are usually caused by physical layer issues such as faulty cables, connectors, ports, or interference. The network administrator will most likely start to troubleshoot at layer 1 of the OSI model, which is the physical layer that deals with the transmission of bits over a medium. References: CompTIA Network+ Certification Exam Objectives Version 2.0 (Exam Number: N10-006), Domain 4.0 Network Troubleshooting and Tools, Objective 4.1 Given a scenario, implement network troubleshooting methodology.

NEW QUESTION 57

SIMULATION - (Topic 1)

You are tasked with verifying the following requirements are met in order to ensure network security.

Requirements: Datacenter


Ensure network is subnetted to allow all devices to communicate properly while minimizing address space usage

Provide a dedicated server to resolve IP addresses and hostnames correctly and handle port 53 traffic

Building A

Ensure network is subnetted to allow all devices to communicate properly while minimizing address space usage

Provide devices to support 5 additional different office users
 Add an additional mobile user
 Replace the Telnet server with a more secure solution
 Screened subnet
 Ensure network is subnetted to allow all devices to communicate properly while minimizing address space usage
 Provide a server to handle external 80/443 traffic
 Provide a server to handle port 20/21 traffic
INSTRUCTIONS
 Drag and drop objects onto the appropriate locations. Objects can be used multiple times and not all placeholders need to be filled.
 Available objects are located in both the Servers and Devices tabs of the Drag & Drop menu.
 If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.

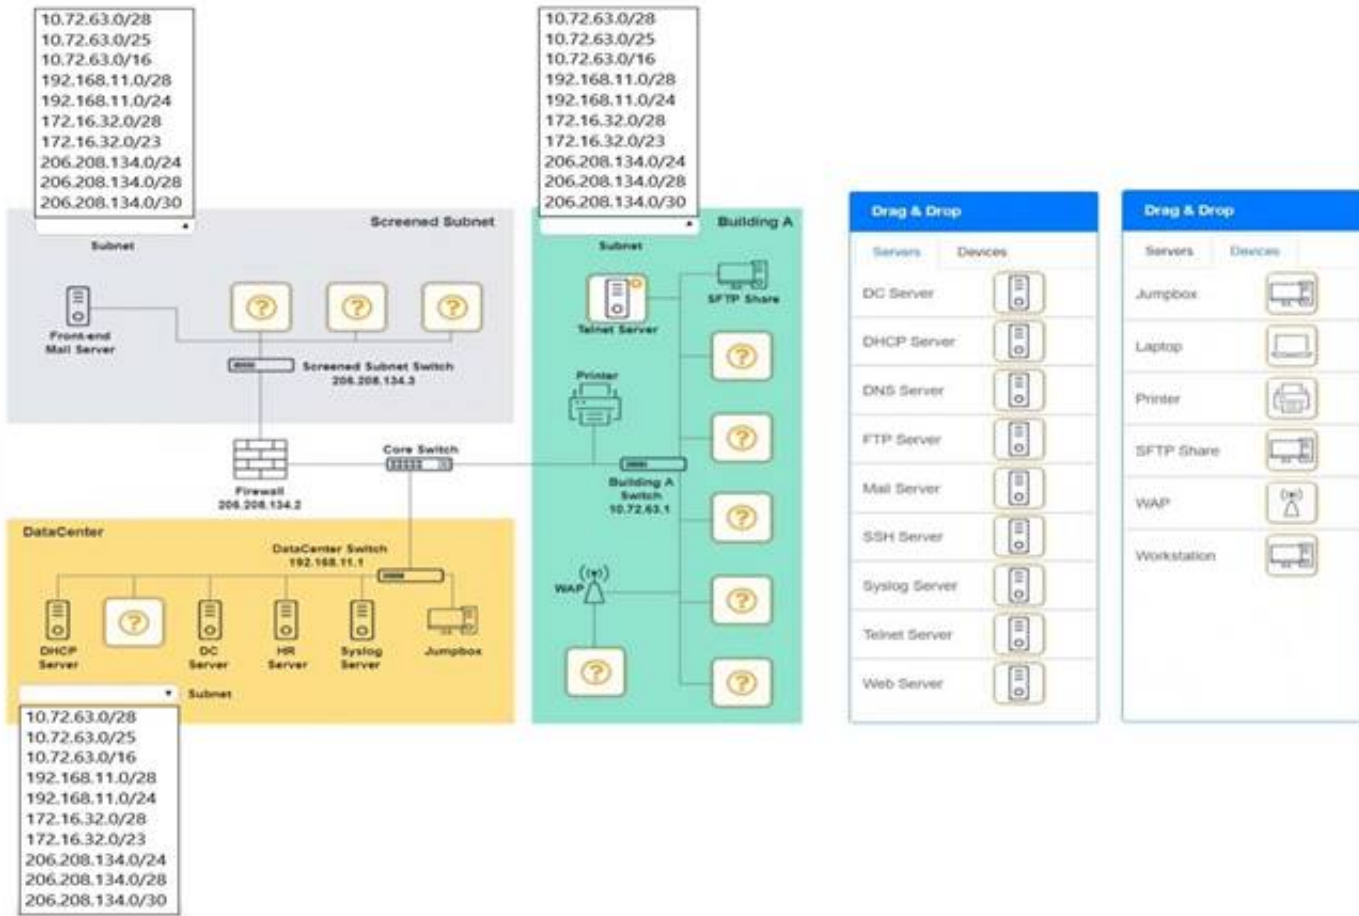


- A. Mastered
 B. Not Mastered

Answer: A

Explanation:

Screened Subnet devices – Web server, FTP server
 Building A devices – SSH server top left, workstations on all 5 on the right, laptop on bottom left
 DataCenter devices – DNS server.

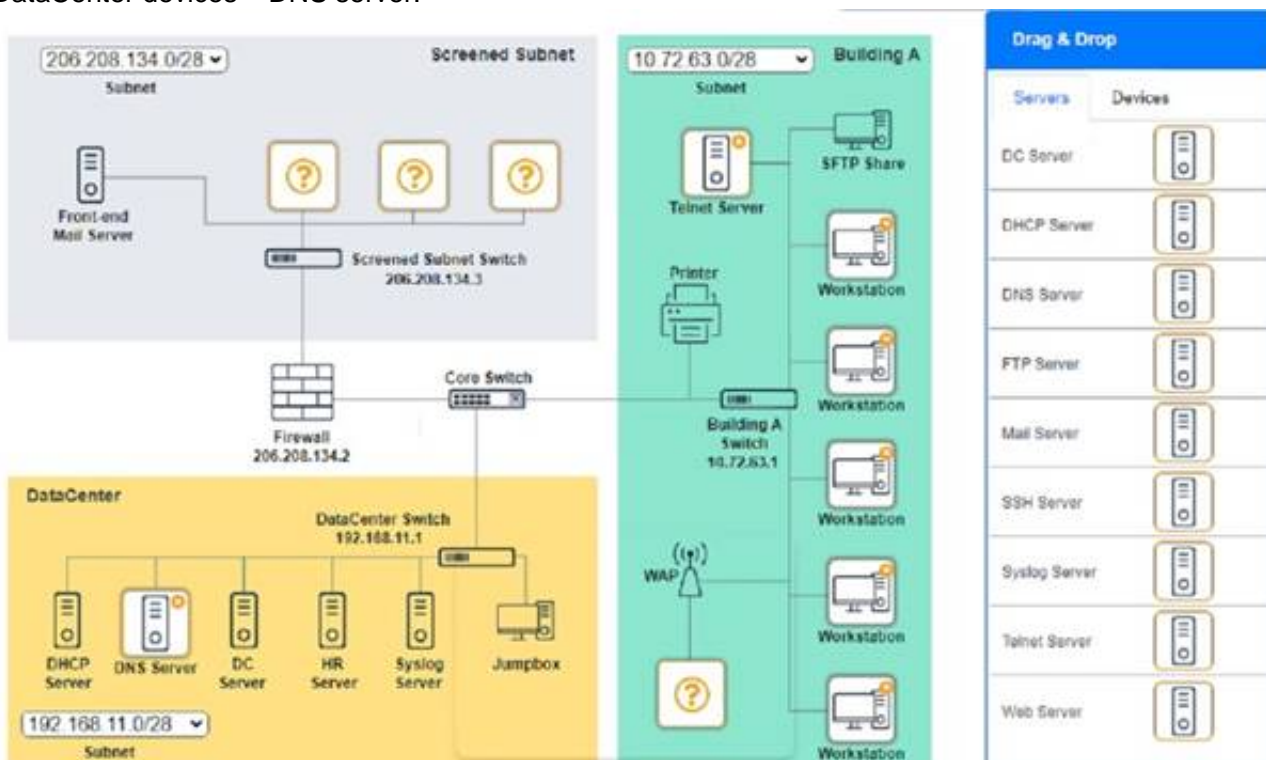



A screenshot of a computer
Description automatically generated

NEW QUESTION 61

- (Topic 1)

A technician is troubleshooting a wireless connectivity issue in a small office located in a high-rise building. Several APs are mounted in this office. The users report that the network connections frequently disconnect and reconnect throughout the day. Which of the following is the MOST likely cause of this issue?

- A. The AP association time is set too low
- B. EIRP needs to be boosted
- C. Channel overlap is occurring
- D. The RSSI is misreported

Answer: C

Explanation:

Channel overlap is a common cause of wireless connectivity issues, especially in high-density environments where multiple APs are operating on the same or adjacent frequencies. Channel overlap can cause interference, signal degradation, and performance loss for wireless devices. The AP association time, EIRP, and RSSI are not likely to cause frequent disconnects and reconnects for wireless users.

NEW QUESTION 65

- (Topic 1)

Several WIFI users are reporting the inability to connect to the network. WLAN users on the guest network are able to access all network resources without any performance issues. The following table summarizes the findings after a site survey of the area in question:

Location	AP 1	AP 2	AP 3	AP 4
SSID	Corp1	Corp1	Corp1/Guest	Corp1/Guest
Channel	2	1	5	11
RSSI	-81dBm	-82dBm	-44dBm	-41dBm
Antenna type	Omni	Omni	Directional	Directional

Which of the following should a wireless technician do NEXT to troubleshoot this issue?

- A. Reconfigure the channels to reduce overlap
- B. Replace the omni antennas with directional antennas
- C. Update the SSIDs on all the APs
- D. Decrease power in AP 3 and AP 4

Answer: B

Explanation:

Based on the site survey table, we can see that AP 2, AP 3, and AP 4 are all broadcasting on the same channel, which can cause interference and affect performance. Therefore, the next step a wireless technician should take to troubleshoot this issue is to reconfigure the channels to reduce overlap. This will help to improve network performance and eliminate any interference.

References:

? Network+ N10-007 Certification Exam Objectives, Objective 2.8: Given a scenario, troubleshoot common wireless problems and perform site surveys.

NEW QUESTION 68

- (Topic 1)

A user reports being unable to access network resources after making some changes in the office. Which of the following should a network technician do FIRST?

- A. Check the system's IP address
- B. Do a ping test against the servers
- C. Reseat the cables into the back of the PC
- D. Ask what changes were made

Answer: D

Explanation:

When a user reports being unable to access network resources after making some changes, the network technician should first ask the user what changes were made. This information can help the technician identify the cause of the issue and determine the appropriate course of action.

References: CompTIA Network+ Certification Study Guide, Sixth Edition by Glen E. Clarke

NEW QUESTION 73

- (Topic 1)

Which of the following is used to prioritize Internet usage per application and per user on the network?

- A. Bandwidth management
- B. Load balance routing
- C. Border Gateway Protocol
- D. Administrative distance

Answer: A

Explanation:

Bandwidth management is used to prioritize Internet usage per application and per user on the network. This allows an organization to allocate network resources to mission-critical applications and users, while limiting the bandwidth available to non- business-critical applications. References: Network+ Certification Study Guide, Chapter 2: Network Operations

NEW QUESTION 74

- (Topic 1)

A technician is writing documentation regarding a company's server farm. The technician needs to confirm the server name for all Linux servers. Which of the following commands should the technician run?

- A. ipconfig
- B. nslookup
- C. arp
- D. route

Answer: B

Explanation:

The nslookup command should be run to confirm the server name for all Linux servers. Nslookup is a tool that queries DNS servers to resolve hostnames to IP addresses or vice versa. It can also provide other information about DNS records, such as MX, NS, SOA, etc. By running nslookup with the IP address of a Linux server, the technician can obtain its hostname. References: <https://www.howtogeek.com/663056/how-to-use-the-nslookup-command-on-linux/>

NEW QUESTION 78

- (Topic 1)

Wireless users are reporting intermittent internet connectivity. Connectivity is restored when the users disconnect and reconnect, utilizing the web authentication process each time. The network administrator can see the devices connected to the APs at all times. Which of the following steps will MOST likely determine the cause of the issue?

- A. Verify the session time-out configuration on the captive portal settings
- B. Check for encryption protocol mismatch on the client's wireless settings
- C. Confirm that a valid passphrase is being used during the web authentication
- D. Investigate for a client's disassociation caused by an evil twin AP

Answer: A

Explanation:

A captive portal is a web page that requires users to authenticate before they can access the internet. If the session time-out configuration is too short, users may experience intermittent internet connectivity and have to reconnect using the web authentication process each time. The network administrator can verify the session time-out configuration on the captive portal settings and adjust it if needed. References: CompTIA Network+ Certification Exam Objectives Version 2.0 (Exam Number: N10-006), Domain 1.0 Network Architecture, Objective 1.8 Explain the purposes and use cases for advanced networking devices.

NEW QUESTION 82

SIMULATION - (Topic 1)

SIMULATION


You have been tasked with setting up a wireless network in an office. The network will consist of 3 Access Points and a single switch. The network must meet the following parameters:

The SSIDs need to be configured as CorpNet with a key of S3cr3t! The wireless signals should not interfere with each other

The subnet the Access Points and switch are on should only support 30 devices maximum The Access Points should be configured to only support TKIP clients at a maximum speed INSTRUCTIONS

Click on the wireless devices and review their information and adjust the settings of the access points to meet the given requirements.

If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.

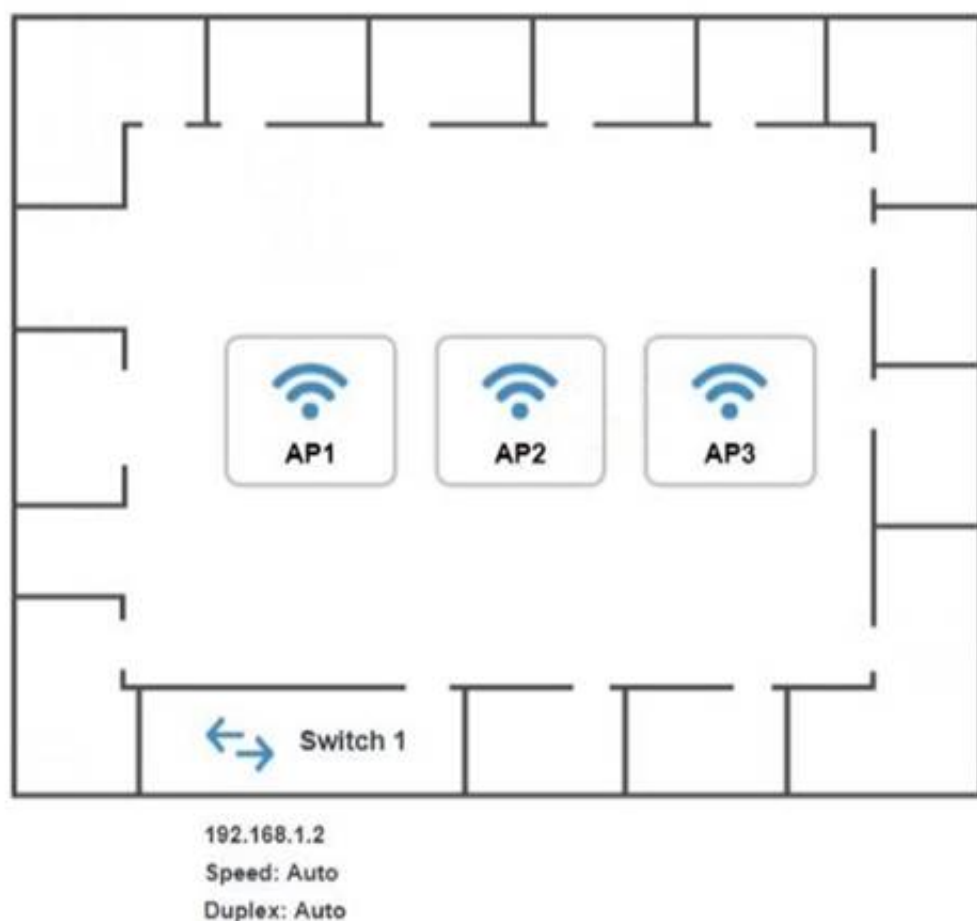

AP1 Configuration

https://ap1.setup.do

Basic Configuration

Access Point Name

AP1

IP Address

/

Gateway

192.168.1.1

SSID

SSID Broadcast

☒ Yes

☐ No

Wireless

Mode

B

G

Channel

Wired

Speed

☐ Auto

☒ 100

☐ 1000

Duplex

☐ Auto

☐ Half

☒ Full

Security Configuration

Security Settings

☒ None

☐ WEP

☐ WPA

☐ WPA2

☐ WPA2 - Enterprise

Key or Passphrase

Reset to Default

Save

Close

AP2 Configuration

https://ap2.setup.do

Basic Configuration

Access Point Name

AP2

IP Address

/

Gateway

192.168.1.1

SSID

SSID Broadcast

Yes

No

Wireless

Mode

B

G

Channel

1

2

3

4

5

6

7

8

9

10

11

Wired

Speed

Auto

100

1000

Duplex

Auto

Half

Full

Security Configuration

Security Settings

None

WEP

WPA

WPA2

WPA2 - Enterprise

Key or Passphrase

Reset to Default

Save

Close

AP3 Configuration

https://ap3.setup.do

Basic Configuration

Access Point Name

AP3

IP Address

 /

Gateway

192.168.1.1

SSID

SSID Broadcast

☒ Yes

☐ No

Wireless

Mode

B

G

Channel

1

2

3

4

5

6

7

8

9

10

11

Wired

Speed

☐ Auto

☒ 100

☐ 1000

Duplex

☐ Auto

☐ Half

☒ Full

Security Configuration

Security Settings

☒ None

☐ WEP

☐ WPA

☐ WPA2

☐ WPA2 - Enterprise

Key or Passphrase

Reset to Default

Save

Close

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

On the first exhibit, the layout should be as follows

AP1 Configuration

https://ap1.setup.do

Basic Configuration

Access Point Name

AP1

IP Address

192.168.1.32

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

Yes

No

Wireless

Mode

B

Channel

3

Wired

Speed

Auto

100

1000

Duplex

Auto

Half

Full

Security Configuration

Security Settings

None

WEP

WPA

WPA2

WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Graphical user interface, text, application, chat or text message Description automatically generated
Description automatically generated

AP1 Configuration

https://ap1.setup.do

IP Address

192.168.1.32

27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

Yes

No

Wireless

Mode

B

Channel

3

Wired

Speed

Auto

100

1000

Duplex

Auto

Half

Full

Security Configuration

Security Settings

None

WEP

WPA

WPA2

WPA2 - Enterprise

Graphical user interface
Description automatically generated

Security Configuration

Security Settings

None

WEP

WPA

WPA2

WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Graphical user interface, text, application, chat or text message
Description automatically generated

Guaranteed success with Our exam guides

visit - <https://www.certshared.com>

AP1 Configuration

←

→

↺

https://ap1.setup.do

IP Address

192.168.1.3

/

27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

☒ Yes ☐ No

Wireless

Mode

G

▼

Channel

3

▼

Wired

Speed

☒ Auto ☐ 100 ☐ 1000

Duplex

☒ Auto ☐ Half ☐ Full

Security Configuration

Security Settings

☐ None ☐ WEP ☒ WPA ☐ WPA2 ☐ WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Reset to Default

Save

Close

Graphical user interface
Description automatically generated
Exhibit 2 as follows
Access Point Name AP2

AP2 Configuration

←

→

↺

https://ap2.setup.do

Basic Configuration

Access Point Name

AP2

IP Address

192.168.1.64

/

27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

☒ Yes ☐ No

Wireless

Mode

B

▼

Channel

6

▼

Wired

Speed

☐ Auto ☒ 100 ☐ 1000

Duplex

☐ Auto ☐ Half ☒ Full

Security Configuration

Security Settings

☐ None ☐ WEP ☒ WPA ☐ WPA2 ☐ WPA2 - Enterprise

Key or Passphrase

Reset to Default

Save

Close

Graphical user interface
Description automatically generated

Security Configuration

Security Settings

☐ None ☐ WEP ☐ WPA ☐ WPA2 ☒ WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Graphical user interface, text, application, chat or text message
Description automatically generated

AP2 Configuration

←

→

↺

https://ap2.setup.do

IP Address

192.168.1.4 / 27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

☒ Yes ☐ No

Wireless

Mode

G

Channel

6

Wired

Speed

☒ Auto ☐ 100 ☐ 1000

Duplex

☒ Auto ☐ Half ☐ Full

Security Configuration

Security Settings

☐ None ☐ WEP ☒ WPA ☐ WPA2 ☐ WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Reset to Default

Save

Close

Graphical user interface
Description automatically generated
Exhibit 3 as follows
Access Point Name AP3

Guaranteed success with Our exam guides

visit - <https://www.certshared.com>

AP3 Configuration

←

→

↺

https://ap3.setup.do

Basic Configuration

Access Point Name

AP3

IP Address

192.168.1.96

/

27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

☒ Yes
 ☐ No

Wireless

Mode

B

Channel

9

Wired

Speed

☐ Auto
 ☒ 100
 ☐ 1000

Duplex

☐ Auto
 ☐ Half
 ☒ Full

Security Configuration

Reset to Default

Save

Close

Graphical user interface
 Description automatically generated

Security Configuration

Security Settings

☐ None
 ☐ WEP
 ☐ WPA
 ☐ WPA2
 ☒ WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Graphical user interface, text, application, chat or text message
 Description automatically generated

AP3 Configuration

←

→

↺

https://ap3.setup.do

IP Address

192.168.1.5

/

27

Gateway

192.168.1.1

SSID

CorpNet

SSID Broadcast

☒ Yes
 ☐ No

Wireless

Mode

G

Channel

9

Wired

Speed

☒ Auto
 ☐ 100
 ☐ 1000

Duplex

☒ Auto
 ☐ Half
 ☐ Full

Security Configuration

Security Settings

☐ None
 ☐ WEP
 ☒ WPA
 ☐ WPA2
 ☐ WPA2 - Enterprise

Key or Passphrase

S3cr3t!

Reset to Default

Save

Close

Graphical user interface
 Description automatically generated

NEW QUESTION 86

- (Topic 1)

Which of the following connector types would have the MOST flexibility?

- A. SFP
- B. BNC
- C. LC
- D. RJ45

Answer: A

Explanation:

SFP (Small Form-factor Pluggable) is a connector type that has the most flexibility. It is a hot-swappable transceiver that can support different speeds, distances, and media types depending on the module inserted. It can be used for both copper and fiber connections and supports various protocols such as Ethernet, Fibre Channel, and SONET. References: <https://www.fs.com/what-is-sfp-transceiver-aid-11.html>

NEW QUESTION 87

- (Topic 2)

A network administrator is required to ensure that auditors have read-only access to the system logs, while systems administrators have read and write access to the system logs, and operators have no access to the system logs. The network administrator has configured security groups for each of these functional categories. Which of the following security capabilities will allow the network administrator to maintain these permissions with the LEAST administrative effort?

- A. Mandatory access control
- B. User-based permissions
- C. Role-based access
- D. Least privilege

Answer: C

Explanation:

Role-based access is a security capability that assigns permissions to users based on their roles or functions within an organization. It allows the network administrator to maintain these permissions with the least administrative effort, as they only need to configure the security groups for each role once and then assign users to those groups. Mandatory access control is a security capability that assigns permissions based on security labels or classifications, which requires more administrative effort to maintain. User-based permissions are a security capability that assigns permissions to individual users, which is not scalable or efficient for large organizations. Least privilege is a security principle that states that users should only have the minimum level of access required to perform their tasks, which is not a security capability by itself.

NEW QUESTION 92

- (Topic 2)

A business is using the local cable company to provide Internet access. Which of the following types of cabling will the cable company MOST likely use from the demarcation point back to the central office?

- A. Multimode
- B. Cat 5e
- C. RG-6
- D. Cat 6
- E. 100BASE-T

Answer: C

Explanation:

RG-6 is a type of coaxial cable that is commonly used by cable companies to provide Internet access from the demarcation point back to the central office. It has a thicker conductor and better shielding than RG-59, which is another type of coaxial cable. Multimode and Cat 5e are types of fiber optic and twisted pair cables respectively, which are not typically used by cable companies. Cat 6 and 100BASE-T are standards for twisted pair cables, not types of cabling.

NEW QUESTION 97

- (Topic 2)

A network administrator is setting up several IoT devices on a new VLAN and wants to accomplish the following

- * 1. Reduce manual configuration on each system
- * 2. Assign a specific IP address to each system
- * 3. Allow devices to move to different switchports on the same VLAN

Which of the following should the network administrator do to accomplish these requirements?

- A. Set up a reservation for each device
- B. Configure a static IP on each device
- C. Implement private VLANs for each device
- D. Use DHCP exclusions to address each device

Answer: A

Explanation:

A reservation is a feature of DHCP that assigns a specific IP address to a device based on its MAC address. This way, the device will always receive the same IP address from the DHCP server, regardless of its location or connection time. A network administrator can set up a reservation for each IoT device to accomplish the requirements of reducing manual configuration, assigning a specific IP address, and allowing devices to move to different switchports on the same VLAN. References: <https://www.comptia.org/blog/what-is-dhcp>

NEW QUESTION 100

- (Topic 2)

Which of the following services can provide data storage, hardware options, and scalability to a third-party company that cannot afford new devices?

- A. SaaS
- B. IaaS
- C. PaaS
- D. DaaS

Answer: B

Explanation:

IaaS stands for Infrastructure as a Service, which is a cloud computing model that provides virtualized computing resources such as servers, storage, and networking over the Internet. IaaS can provide data storage, hardware options, and scalability to a third-party company that cannot afford new devices by allowing them to rent or lease the infrastructure they need from a cloud provider. The company can pay only for what they use and scale up or down as needed.

References: <https://www.comptia.org/blog/what-is-iaas>

NEW QUESTION 102

- (Topic 2)

A company that uses VoIP telephones is experiencing intermittent issues with one-way audio and dropped conversations. The manufacturer says the system will work if ping times are less than 50ms. The company has recorded the following ping times:

10ms	10ms	10ms	100ms	70ms	5ms	5ms	80ms	100ms	5ms	5ms
------	------	------	-------	------	-----	-----	------	-------	-----	-----

Which of the following is MOST likely causing the issue?

- A. Attenuation
- B. Latency
- C. VLAN mismatch
- D. Jitter

Answer: D

Explanation:

Jitter is most likely causing the issue of intermittent one-way audio and dropped conversations for the company that uses VoIP telephones. Jitter is a variation in delay of packets arriving at the destination. It can cause choppy or distorted audio quality for VoIP applications, especially over WAN links that have limited bandwidth and high latency. The recommended jitter for VoIP is less than 10ms. The company has recorded ping times that exceed 50ms, which indicates high jitter and latency on their network. References: <https://www.voip-info.org/voip-jitter/> 1

NEW QUESTION 103

- (Topic 2)

A wireless network was installed in a warehouse for employees to scan crates with a wireless handheld scanner. The wireless network was placed in the corner of the building near the ceiling for maximum coverage. However, users in the offices adjacent to the warehouse have noticed a large amount of signal overlap from the new network. Additionally, warehouse employees report difficulty connecting to the wireless network from the other side of the building; however, they have no issues when they are near the antenna. Which of the following is MOST likely the cause?

- A. The wireless signal is being refracted by the warehouse's windows
- B. The antenna's power level was set too high and is overlapping
- C. An omnidirectional antenna was used instead of a unidirectional antenna
- D. The wireless access points are using channels from the 5GHz spectrum

Answer: C

Explanation:

An omnidirectional antenna was used instead of a unidirectional antenna, which is most likely the cause of the wireless network issues. An omnidirectional antenna provides wireless coverage in all directions from the antenna, which can cause signal overlap with adjacent offices and interference with other wireless networks. A unidirectional antenna, on the other hand, provides wireless coverage in a specific direction from the antenna, which can reduce signal overlap and interference and increase signal range and quality. A unidirectional antenna would be more suitable for a warehouse environment where users are located on one side of the building. References: <https://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/82068-omni-vs-direct.html> 1

NEW QUESTION 105

- (Topic 2)

A technician is deploying a low-density wireless network and is contending with multiple types of building materials. Which of the following wireless frequencies would allow for the LEAST signal attenuation?

- A. 2.4GHz
- B. 5GHz
- C. 850MHz
- D. 900MHz

Answer: A

Explanation:

2.4GHz is the wireless frequency that would allow for the least signal attenuation when deploying a low-density wireless network with multiple types of building materials. Signal attenuation is the loss of signal strength or quality as it travels through a medium or over a distance. Signal attenuation can be affected by various factors such as distance, interference, reflection, refraction, diffraction, scattering, or absorption. Generally, lower frequencies have less signal attenuation than higher frequencies because they can penetrate obstacles better and travel farther. Therefore, 2.4GHz would have less signal attenuation than 5GHz, 850MHz, or 900MHz. References: <https://www.cisco.com/c/en/us/support/docs/wireless-mobility/wireless-lan-wlan/82068-omni-vs-direct.html>

NEW QUESTION 106

- (Topic 2)

A SaaS provider has decided to leave an unpatched VM available via a public DMZ port. With which of the following concepts is this technique MOST closely associated?

- A. Insider threat
- B. War driving
- C. Evil twin
- D. Honeygot

Answer: D

Explanation:

A honeypot is a decoy system that is intentionally left vulnerable or exposed to attract attackers and divert them from the real targets. A honeypot can also be used to collect information about the attackers' techniques and motives. In the scenario, the SaaS provider has left an unpatched VM available via a public DMZ port, which could be a honeypot technique to lure attackers and monitor their activities. References: <https://www.comptia.org/blog/what-is-a-honeypot>

NEW QUESTION 108

- (Topic 2)

A network technician has multimode fiber optic cable available in an existing IDF. Which of the following Ethernet standards should the technician use to connect the network switch to the existing fiber?

- A. 10GBaseT
- B. 1000BaseT
- C. 1000BaseSX
- D. 1000BaseLX

Answer: C

Explanation:

1000BaseSX is an Ethernet standard that should be used to connect the network switch to the existing multimode fiber optic cable. 1000BaseSX is a Gigabit Ethernet standard that uses short-wavelength laser (850 nm) over multimode fiber optic cable. It can support distances up to 550 meters depending on the cable type and quality. It is suitable for short-range network segments such as campus or building backbone networks. References: https://www.cisco.com/c/en/us/products/collateral/interfaces-modules/gigabit-ethernet-gbic-sfp-modules/product_data_sheet09186a008014cb5e.html

NEW QUESTION 113

- (Topic 2)

Which of the following would be used to expedite MX record updates to authoritative NSs?

- A. UDP forwarding
- B. DNS caching
- C. Recursive lookup
- D. Time to live

Answer: D

Explanation:

Time to live (TTL) is a value that indicates how long a DNS record can be cached by authoritative NSs (name servers) or other DNS servers before it expires and needs to be updated. A lower TTL value would expedite MX record updates to authoritative NSs, as they would refresh the record more frequently. UDP forwarding is not a DNS term, but a technique of sending UDP packets from one host to another. DNS caching is the process of storing DNS records locally for faster resolution, which does not expedite MX record updates. Recursive lookup is a type of DNS query where a DNS server queries other DNS servers on behalf of a client until it finds the answer, which does not expedite MX record updates.

NEW QUESTION 118

- (Topic 2)

A user reports a weak signal when walking 20ft (61 m) away from the WAP in one direction, but a strong signal when walking 20ft in the opposite direction The technician has reviewed the configuration and confirmed the channel type is correct There is no jitter or latency on the connection Which of the following would be the MOST likely cause of the issue?

- A. Antenna type
- B. Power levels
- C. Frequency
- D. Encryption type

Answer: A

Explanation:

The antenna type affects the signal strength and coverage of a WAP. Different types of antennas have different radiation patterns and gain, which determine how far and wide the signal can reach. If the user experiences a weak signal in one direction but a strong signal in the opposite direction, it could mean that the antenna type is not suitable for the desired coverage area. The technician should consider changing the antenna type to one that has a more balanced or directional radiation pattern. References: <https://community.cisco.com/t5/wireless-small-business/wap200-poor-signal-strength/td-p/1565796>

NEW QUESTION 119

- (Topic 2)

A company wants to implement a large number of WAPs throughout its building and allow users to be able to move around the building without dropping their connections Which of the following pieces of equipment would be able to handle this requirement?

- A. A VPN concentrator
- B. A load balancer
- C. A wireless controller
- D. A RADIUS server

Answer: C

Explanation:

A wireless controller would be able to handle the requirement of implementing a large number of WAPs throughout the building and allowing users to move around without dropping their connections. A wireless controller is a device that centrally manages and configures multiple wireless access points (WAPs) on a network. It can provide features such as load balancing, roaming, security, QoS, and monitoring for the wireless network. A wireless controller can also support wireless mesh networks, where some WAPs act as relays for other WAPs to extend the wireless coverage. References: <https://www.cisco.com/c/en/us/products/wireless/wireless-lan-controller/index.html>

NEW QUESTION 120

- (Topic 2)

A network technician was troubleshooting an issue for a user who was being directed to cloned websites that were stealing credentials. The URLs were correct for the websites but an incorrect IP address was revealed when the technician used ping on the user's PC. After checking the settings, the technician found the DNS server address was incorrect. Which of the following describes the issue?

- A. Rogue DHCP server
- B. Misconfigured HSRP
- C. DNS poisoning
- D. Exhausted IP scope

Answer: C

Explanation:

DNS poisoning is a type of attack that modifies the DNS records of a domain name to point to a malicious IP address instead of the legitimate one. This can result in users being directed to cloned websites that are stealing credentials, even if they enter the correct URL for the website. The incorrect DNS server address on the user's PC could be a sign of DNS poisoning, as the attacker could have compromised the DNS server or spoofed its response to redirect the user's queries. References: <https://www.comptia.org/blog/what-is-dns-poisoning>

NEW QUESTION 123

- (Topic 2)

A client moving into a new office wants the IP network set up to accommodate 412 network-connected devices that are all on the same subnet. The subnet needs to be as small as possible. Which of the following subnet masks should be used to achieve the required result?

- A. 255.255.0.0
- B. 255.255.252.0
- C. 255.255.254.0
- D. 255.255.255.0

Answer: B

Explanation:

255.255.252.0 is a subnet mask that allows for 1022 network-connected devices on the same subnet, which is the smallest subnet that can accommodate 412 devices. The subnet mask determines how many bits are used for the network portion and how many bits are used for the host portion of an IP address. A smaller subnet mask means more bits are used for the network portion and less bits are used for the host portion, which reduces the number of available hosts on the subnet. 255.255.0.0 allows for 65534 hosts on the same subnet, which is too large. 255.255.254.0 allows for 510 hosts on the same subnet, which is also too large. 255.255.255.0 allows for 254 hosts on the same subnet, which is too small.

NEW QUESTION 125

- (Topic 2)

A network administrator decided to use SLAAC in an extensive IPv6 deployment to alleviate IP address management. The devices were properly connected into the LAN but autoconfiguration of the IP address did not occur as expected. Which of the following should the network administrator verify?

- A. The network gateway is configured to send router advertisements.
- B. A DHCP server is present on the same broadcast domain as the clients.
- C. The devices support dual stack on the network layer.
- D. The local gateway supports anycast routing.

Answer: A

Explanation:

SLAAC (Stateless Address Autoconfiguration) is a method for IPv6 devices to automatically configure their IP addresses based on the network prefix advertised by a router. The router sends periodic router advertisements (RAs) that contain the network prefix and other parameters for the devices to use. If the network gateway is not configured to send RAs, then SLAAC will not work. A DHCP server is not needed for SLAAC, as the devices generate their own addresses without relying on a server. Dual stack and anycast routing are not related to SLAAC.

NEW QUESTION 126

- (Topic 2)

A network field technician is installing and configuring a secure wireless network. The technician performs a site survey. Which of the following documents would MOST likely be created as a result of the site survey?

- A. Physical diagram
- B. Heat map
- C. Asset list
- D. Device map

Answer: B

Explanation:

A heat map would most likely be created as a result of the site survey. A heat map is a graphical representation of the wireless signal strength and coverage in a given area. It can show the location of APs, antennas, walls, obstacles, interference sources, and dead zones. It can help with planning, optimizing, and troubleshooting wireless networks. References: <https://www.netspotapp.com/what-is-a-wifi-heatmap.html>

NEW QUESTION 131

- (Topic 2)

A network technician is configuring a new firewall for a company with the necessary access requirements to be allowed through the firewall. Which of the following would normally be applied as the LAST rule in the firewall?

- A. Secure SNMP
- B. Port security
- C. Implicit deny
- D. DHCP snooping

Answer: C

Explanation:

Implicit deny is a firewall rule that blocks all traffic that is not explicitly allowed by other rules. Implicit deny is usually applied as the last rule in the firewall to ensure that only the necessary access requirements are allowed through the firewall and that any unwanted or malicious traffic is rejected. Implicit deny can also provide a default security policy and a baseline for auditing and logging purposes.

Secure SNMP is a protocol that allows network devices to send event messages to a centralized server or console for logging and analysis. Secure SNMP can be used to monitor and manage the status, performance, and configuration of network devices. Secure SNMP can also help to detect and respond to potential problems or faults on the network. However, secure SNMP is not a firewall rule; it is a network management protocol.

Port security is a feature that allows a switch to restrict the devices that can connect to a specific port based on their MAC addresses. Port security can help to prevent unauthorized access, spoofing, or MAC flooding attacks on the switch. However, port security is not a firewall rule; it is a switch feature.

DHCP snooping is a feature that allows a switch to filter DHCP messages and prevent rogue DHCP servers from assigning IP addresses to devices on the network. DHCP snooping can help to prevent IP address conflicts, spoofing, or denial-of-service attacks on the network. However, DHCP snooping is not a firewall rule; it is a switch feature.

NEW QUESTION 132

- (Topic 2)

A network technician is observing the behavior of an unmanaged switch when a new device is added to the network and transmits data. Which of the following BEST describes how the switch processes this information?

- A. The data is flooded out of every port
- B. including the one on which it came in.
- C. The data is flooded out of every port but only in the VLAN where it is located.
- D. The data is flooded out of every port, except the one on which it came in
- E. The data is flooded out of every port, excluding the VLAN where it is located

Answer: C

Explanation:

The switch processes the data by flooding it out of every port, except the one on which it came in. Flooding is a process where a switch sends a data frame to all ports except the source port when it does not have an entry for the destination MAC address in its MAC address table. Flooding allows the switch to learn the MAC addresses of the devices connected to its ports and update its MAC address table accordingly. Flooding also ensures that the data frame reaches its intended destination, even if the switch does not know its location. References: <https://www.cisco.com/c/en/us/support/docs/lan-switching/spanning-tree-protocol/10556-16.html>

NEW QUESTION 137

- (Topic 2)

An IDS was installed behind the edge firewall after a network was breached. The network was then breached again even though the IDS logged the attack. Which of the following should be used in place of these devices to prevent future attacks?

- A. A network tap
- B. A proxy server
- C. A UTM appliance
- D. A content filter

Answer: C

Explanation:

A UTM appliance stands for Unified Threat Management appliance, which is a device that combines multiple security functions into one solution. A UTM appliance can provide firewall, IDS/IPS, antivirus, VPN, web filtering, and other security features. A network technician can use a UTM appliance in place of an edge firewall and an IDS to prevent future attacks, as a UTM appliance can block malicious traffic and detect and respond to intrusions more effectively. References: <https://www.comptia.org/blog/what-is-utm>

NEW QUESTION 140

- (Topic 2)

A user recently made changes to a PC that caused it to be unable to access websites by both FQDN and IP Local resources, such as the file server remain accessible. Which of the following settings did the user MOST likely misconfigure?

- A. Static IP
- B. Default gateway
- C. DNS entries
- D. Local host file

Answer: B

Explanation:

The default gateway is the setting that the user most likely misconfigured on the PC that caused it to be unable to access websites by both FQDN and IP. The default gateway is a device, usually a router or a firewall, that connects a local network to other networks such as the Internet. It acts as an intermediary between devices on different networks and forwards packets based on their destination IP addresses. If the default gateway is not configured correctly on a PC, it will not be

able to communicate with devices outside its local network, such as web servers or DNS servers. References:
<https://www.cisco.com/c/en/us/support/docs/ip/routing-information-protocol-rip/16448-default-gateway.html>

NEW QUESTION 142

- (Topic 2)

An ARP request is broadcasted and sends the following request. "Who is 192.168.1.200?

Tell 192.168.1.55"

At which of the following layers of the OSI model does this request operate?

- A. Application
- B. Data link
- C. Transport
- D. Network
- E. Session

Answer: B

Explanation:

An ARP request operates at the data link layer of the OSI model. ARP (Address Resolution Protocol) is a protocol that maps IP addresses to MAC addresses on a local area network. It allows devices to communicate with each other without knowing their MAC addresses beforehand. ARP operates at the data link layer (layer 2) of the OSI model, which is responsible for framing and addressing data packets on a physical medium. References:

<https://www.cisco.com/c/en/us/support/docs/ip/routing-information-protocol-rip/13788-3.html>

NEW QUESTION 145

- (Topic 2)

A corporation has a critical system that would cause unrecoverable damage to the brand if it was taken offline. Which of the following disaster recovery solutions should the corporation implement?

- A. Full backups
- B. Load balancing
- C. Hot site
- D. Snapshots

Answer: C

Explanation:

A hot site is the disaster recovery solution that the corporation should implement for its critical system that would cause unrecoverable damage to the brand if it was taken offline. A hot site is a fully operational backup site that can take over the primary site's functions in case of a disaster or disruption. A hot site has all the necessary hardware, software, data, network connections, and personnel to resume normal operations with minimal downtime. A hot site is suitable for systems that require high availability and cannot afford any data loss or interruption. References: <https://www.enterprisestorageforum.com/management/disaster-recovery-site/> 1

NEW QUESTION 150

- (Topic 2)

Which of the following technologies allows traffic to be sent through two different ISPs to increase performance?

- A. Fault tolerance
- B. Quality of service
- C. Load balancing
- D. Port aggregation

Answer: C

Explanation:

Load balancing is a technology that allows traffic to be sent through two different ISPs to increase performance. Load balancing is a process of distributing network traffic across multiple servers or links to optimize resource utilization, throughput, latency, and reliability. Load balancing can be implemented at different layers of the OSI model, such as layer 4 (transport) or layer 7 (application). Load balancing can also be used for outbound traffic by using multiple ISPs and routing protocols such as BGP (Border Gateway Protocol) to select the best path for each packet. References: https://www.cisco.com/c/en/us/products/collateral/ios-nx-os-software/border-gateway-protocol-bgp/prod_white_paper0900aecd806c4eeb.html

NEW QUESTION 151

- (Topic 2)

During the security audit of a financial firm the Chief Executive Officer (CEO) questions why there are three employees who perform very distinct functions on the server. There is an administrator for creating users another for assigning the users to groups and a third who is the only administrator to perform file rights assignment Which of the following mitigation techniques is being applied?

- A. Privileged user accounts
- B. Role separation
- C. Container administration
- D. Job rotation

Answer: B

Explanation:

Role separation is a security principle that involves dividing the tasks and privileges for a specific business process among multiple users. This reduces the risk of fraud and errors, as no one user has complete control over the process. In the scenario, there are three employees who perform very distinct functions on the server, which is an example of role separation. References: <https://hyperproof.io/resource/segregation-of-duties/>

NEW QUESTION 155

- (Topic 3)

A technician notices that equipment is being moved around and misplaced in the server room, even though the room has locked doors and cabinets. Which of the following would be the BEST solution to identify who is responsible?

- A. Install motion detection
- B. Install cameras.
- C. Install tamper detection.
- D. Hire a security guard.

Answer: B

Explanation:

Installing cameras in the server room is the best solution to identify who is responsible for the equipment being moved and misplaced. Cameras provide a way to monitor the server room in real time and can be used to identify suspicious activity. Additionally, they provide a way to review past activity and allow you to review footage to determine who may be responsible for the misplacement of equipment.

NEW QUESTION 158

- (Topic 3)

A network technician is configuring a wireless access point and wants to only allow company-owned devices to associate with the network. The access point uses PSKs, and a network authentication system does not exist on the network. Which of the following should the technician implement?

- A. Captive portal
- B. Guest network isolation
- C. MAC filtering
- D. Geofencing

Answer: C

Explanation:

MAC filtering is a method of allowing only company-owned devices to associate with the network by using their MAC addresses as identifiers. A MAC address is a unique identifier assigned to each network interface card (NIC) by the manufacturer. MAC filtering can be configured on the wireless access point to allow or deny access based on the MAC address of the device. This way, only devices with known MAC addresses can connect to the network. References: <https://www.comptia.org/training/books/network-n10-008-study-guide> (page 323)

NEW QUESTION 161

- (Topic 3)

A user reports having intermittent connectivity issues to the company network. The network configuration for the user reveals the following:

IP address: 192.168.1.10

Subnet mask: 255.255.255.0

Default gateway: 192.168.1.254

The network switch shows the following ARP table:

MAC address	IP address	Interface	VLAN
0c00.1134.0001	192.168.1.10	eth4	10
0c00.1983.210a	192.168.2.13	eth5	11
0c00.1298.d239	192.168.1.10	eth6	10
0c00.a291.c113	192.168.2.12	eth7	11
0c00.923b.2391	192.168.1.11	eth8	10
feff.2391.1022	192.168.1.254	eth1	10

Which of the following is the most likely cause of the user's connection issues?

- A. A port with incorrect VLAN assigned
- B. A switch with spanning tree conflict
- C. Another PC with manually configured IP
- D. A router with overlapping route tables

Answer: C

Explanation:

This is the most likely cause of the user's connection issues, because the ARP table of the switch shows that there are two devices with the same IP address of 192.168.1.10, but different MAC addresses. This indicates that there is an IP address conflict on the network, where two devices are trying to use the same IP address. This can cause intermittent connectivity issues, as the switch may not be able to forward packets to the correct destination .

NEW QUESTION 163

- (Topic 3)

A customer needs to distribute Ethernet to multiple computers in an office. The customer would like to use non-proprietary standards. Which of the following blocks does the technician need to install?

- A. 110
- B. 66
- C. Bix
- D. Krone

Answer: A

Explanation:

A 110 block is a type of punch-down block that is used to distribute Ethernet to multiple computers in an office. A punch-down block is a device that connects one group of wires to another group of wires by using a special tool that pushes the wires into slots on the block. A 110 block is a non-proprietary standard that supports up to Category 6 cabling and can be used for voice or data applications. References: <https://www.comptia.org/training/books/network-n10-008-study-guide> (page 64)

NEW QUESTION 165

- (Topic 3)

A technician completed troubleshooting and was able to fix an issue. Which of the following is the BEST method the technician can use to pass along the exact steps other technicians should follow in case the issue arises again?

- A. Use change management to build a database
- B. Send an email stating that the issue is resolved.
- C. Document the lessons learned
- D. Close the ticket and inform the users.

Answer: C

Explanation:

Documenting the lessons learned is the best method for passing along the exact steps other technicians should follow in case the issue arises again. Lessons learned are the knowledge and experience gained from completing a project or solving a problem. Documenting the lessons learned helps to capture the best practices, challenges, solutions, and recommendations for future reference and improvement. Documenting the lessons learned can also help to update the knowledge base, standard operating procedures, or policies related to the issue. References: [CompTIA Network+ Certification Exam Objectives], Lessons Learned: Definition & Examples for Project Managers

NEW QUESTION 168

- (Topic 3)

A network administrator is concerned about a rainbow table being used to help access network resources. Which of the following must be addressed to reduce the likelihood of a rainbow table being effective?

- A. Password policy
- B. Remote access policy
- C. Acceptable use policy
- D. Data loss prevention policy

Answer: A

Explanation:

A password policy must be addressed to reduce the likelihood of a rainbow table being effective. A rainbow table is a precomputed table of hashed passwords and their corresponding plaintext values. A rainbow table can be used to crack hashed passwords by performing a reverse lookup of the hash value in the table. A password policy is a set of rules and guidelines that define how passwords should be created, used, and managed in an organization. A password policy can help prevent rainbow table attacks by enforcing strong password requirements, such as length, complexity, expiration, and history. A strong password is one that is hard to guess or crack by using common methods such as brute force or dictionary attacks. References: [CompTIA Network+ Certification Exam Objectives], What Is Rainbow Table Attack? | Kaspersky, Password Policy Best Practices | Thycotic

NEW QUESTION 172

- (Topic 3)

Which of the following describes traffic going in and out of a data center from the internet?

- A. Demarcation point
- B. North-South
- C. Fibre Channel
- D. Spine and leaf

Answer: B

NEW QUESTION 176

- (Topic 3)

Which of the following is the most secure connection used to inspect and provide controlled internet access when remote employees are connected to the corporate network?

- A. Site-to-site VPN
- B. Full-tunnel VPN
- C. Split-tunnel VPN
- D. SSH

Answer: B

Explanation:

A full-tunnel VPN is a type of virtual private network (VPN) that encrypts and routes all the traffic from the remote device to the corporate network, regardless of the destination or protocol. This provides a secure connection for the remote employees to access the corporate resources, as well as inspect and control the internet access through the corporate firewall and proxy servers. A full-tunnel VPN also prevents any leakage of sensitive data or exposure to malicious attacks from the public internet. A full-tunnel VPN is more secure than a split-tunnel VPN, which only encrypts and routes the traffic destined for the corporate network, while allowing the traffic for other destinations to bypass the VPN and use the local internet connection. A site-to-site VPN is a type of VPN that connects two or more networks, such as branch offices or data centers, over the internet. It is not suitable for connecting individual remote employees to the corporate network. SSH stands for Secure Shell, and it is a protocol that allows secure remote login and command execution over an encrypted channel. It is not a type of VPN, and it does not provide

controlled internet access. References: CompTIA Network+ N10-008 Cert Guide, Chapter 5, Section 5.3

NEW QUESTION 179

- (Topic 3)

A network technician has determined the cause of a network disruption. Which of the following is the NEXT step for the technician to perform?

- A. Validate the findings in a top-to-bottom approach
- B. Duplicate the issue, if possible
- C. Establish a plan of action to resolve the issue
- D. Document the findings and actions

Answer: C

NEW QUESTION 182

- (Topic 3)

A technician is investigating why a PC cannot reach a file server with the IP address 192.168.8.129. Given the following TCP/IP network configuration:

Link-local IPv6 address	fe80::28e4:a7cc:a55e:4bea
IPv4 address	192.168.8.105
Subnet mask	255.255.255.128
Default gateway	192.168.8.1

Which of the following configurations on the PC is incorrect?

- A. Subnet mask
- B. IPv4 address
- C. Default gateway
- D. IPv6 address

Answer: C

Explanation:

The default gateway is the IP address of the router that connects the PC to other networks. The default gateway should be on the same subnet as the PC's IPv4 address. However, in this case, the default gateway is 192.168.9.1, which is on a different subnet than the PC's IPv4 address of 192.168.8.15. Therefore, the default gateway configuration on the PC is incorrect and prevents the PC from reaching the file server on another subnet.

NEW QUESTION 187

- (Topic 3)

A technician received a report that some users in a large, 30-floor building are having intermittent connectivity issues. Users on each floor have stable connectivity, but do not have connectivity to other floors. Which of the following devices is MOST likely causing the issue?

- A. User devices
- B. Edge devices
- C. Access switch
- D. Core switch

Answer: D

Explanation:

A core switch is the most likely device causing the issue where users on each floor have stable connectivity, but do not have connectivity to other floors. A core switch is a high-performance switch that connects multiple access switches in a network. An access switch is a switch that connects end devices, such as computers and printers, to the network. A core switch acts as the backbone of the network, providing interconnection and routing between different subnets or VLANs. If the core switch is malfunctioning or misconfigured, it can prevent communication between different segments of the network, resulting in intermittent connectivity issues. References: [CompTIA Network+ Certification Exam Objectives], Core Switch vs Access Switch: What Are the Differences?

NEW QUESTION 192

- (Topic 3)

A wireless technician is working to upgrade the wireless infrastructure for a company. The company currently uses the 802.11g wireless standard on all access points. The company requires backward compatibility and is requesting the least expensive solution. Which of the following should the technician recommend to the company?

- A. 802.11a
- B. 802.11ac
- C. 802Hax
- D. 802.11n

Answer: D

Explanation:

* 802.11n is a wireless standard that supports data rates up to 600 Mbps and operates in both 2.4 GHz and 5 GHz frequency bands. 802.11n is backward compatible with 802.11g, which operates only in 2.4 GHz band. 802.11n is the least expensive solution that can upgrade the wireless infrastructure for the company, as it does not require replacing all the access points or wireless devices

NEW QUESTION 194

- (Topic 3)

A network administrator needs to monitor traffic on a specific port on a switch. Which of the following should the administrator configure to accomplish the task?

- A. Port security
- B. Port tagging
- C. Port mirroring
- D. Media access control

Answer: C

Explanation:

Port mirroring is a technique that allows a network administrator to monitor the traffic on a specific port on a switch by sending a copy of the packets seen on that port to another port where a monitoring device is connected¹. Port mirroring can be used to analyze and debug data, diagnose errors, or perform security audits on the network without affecting the normal operation of the switch

NEW QUESTION 198

- (Topic 3)

While setting up a new workstation, a technician discovers that the network connection is only 100 full duplex (FD), although it is connected to a gigabit switch. While reviewing the interface information in the switch CLI, the technician notes the port is operating at IOOFD but Shows many RX and TX errors. The technician moves the computer to another switchport and experiences the same issues. Which of the following is MOST likely the cause of the low data rate and port errors?

- A. Bad switch ports
- B. Duplex issues
- C. Cable length
- D. Incorrect pinout

Answer: B

NEW QUESTION 200

- (Topic 3)

Which of the following is a security flaw in an application or network?

- A. A threat
- B. A vulnerability
- C. An exploit
- D. A risk

Answer: B

Explanation:

A vulnerability is a security flaw in an application or network that can be exploited by an attacker, allowing them to gain access to sensitive data or take control of the system. Vulnerabilities can range from weak authentication methods to unpatched software, allowing attackers to gain access to the system or data they would not otherwise be able to access. Exploits are programs or techniques used to take advantage of vulnerabilities, while threats are potential dangers, and risks are the likelihood of a threat becoming a reality.

NEW QUESTION 201

- (Topic 3)

A network administrator is configuring a new switch and wants to connect two ports to the core switch to ensure redundancy. Which of the following configurations would meet this requirement?

- A. Full duplex
- B. 802.1Q tagging
- C. Native VLAN
- D. Link aggregation

Answer: D

Explanation:

Link aggregation is a technique that allows multiple physical ports to be combined into a single logical channel, which provides increased bandwidth, load balancing, and redundancy. Link aggregation can be configured using protocols such as Link Aggregation Control Protocol (LACP) or static methods.

References

? Link aggregation is one of the common Ethernet switching features covered in Objective 2.3 of the CompTIA Network+ N10-008 certification exam¹.

? Link aggregation can be used to connect two ports to the core switch to ensure redundancy²³.

? Link aggregation can be configured using LACP or static methods²³.

1: CompTIA Network+ Certification Exam Objectives, page 5 2: Interface Configurations – N10-008 CompTIA Network+ : 2.3 3: CompTIA Network+ N10-008 Cert Guide, Chapter 11, page 323

NEW QUESTION 205

- (Topic 3)

A network administrator installed an additional IDF during a building expansion project. Which of the following documents need to be updated to reflect the change? (Select TWO).

- A. Data loss prevention policy
- B. BYOD policy
- C. Acceptable use policy
- D. Non-disclosure agreement
- E. Disaster recovery plan
- F. Physical network diagram

Answer: AF

NEW QUESTION 210

- (Topic 3)

An IT intern moved the location of a WAP from one conference room to another. The WAP was unable to boot following the move. Which of the following should be used to fix the issue?

- A. Antenna
- B. WLAN controller
- C. Media converter
- D. PoE injector

Answer: D

Explanation:

A PoE injector is a device that provides power over Ethernet (PoE) to a WAP or other network device that does not have a built-in power supply. A PoE injector connects to a power outlet and an Ethernet cable, and sends both power and data to the WAP. If the WAP was moved to a location where there is no power outlet or PoE switch, it would need

a PoE injector to boot up. References:

? Part 3 of the current page talks about PoE and PoE injectors as a way to power WAPs.

? [This article] explains how PoE injectors work and how to use them.

NEW QUESTION 212

- (Topic 3)

A technician installed an 8-port switch in a user's office. The user needs to add a second computer in the office, so the technician connects both PCs to the switch and connects the switch to the wall jack. However, the new PC cannot connect to network resources. The technician then observes the following:

- The new computer does not get an IP address on the client's VLAN.
- Both computers have a link light on their NICs.
- The new PC appears to be operating normally except for the network issue.
- The existing computer operates normally.

Which of the following should the technician do NEXT to address the situation?

- A. Contact the network team to resolve the port security issue.
- B. Contact the server team to have a record created in DNS for the new PC.
- C. Contact the security team to review the logs on the company's SIEM.
- D. Contact the application team to check NetFlow data from the connected switch.

Answer: A

NEW QUESTION 217

- (Topic 3)

Due to space constraints in an IDF, a network administrator can only do a single switch to accommodate three data networks. The administrator needs a configuration that will allow each device to access its expected network without additional connections. The configuration must also allow each device to access the rest of the network. Which of the following should the administrator do to meet these requirements? (Select TWO).

- A. Untag the three VLANs across the uplink
- B. Tag an individual VLAN across the uplink
- C. Untag an individual VLAN per device port
- D. Tag an individual VLAN per device port
- E. Tag the three VLANs across the uplink.
- F. Tag the three VLANs per device port.

Answer: AC

Explanation:

To achieve this, you should do two things:

? Tag the three VLANs across the uplink port that connects to another switch or router. This will allow data packets from different VLANs to cross over into other networks.

? Untag an individual VLAN per device port that connects to an end device. This will assign each device to its expected network without additional connections.

NEW QUESTION 218

- (Topic 3)

In which of the following components do routing protocols belong in a software-defined network?

- A. Infrastructure layer
- B. Control layer
- C. Application layer
- D. Management plane

Answer: B

Explanation:

A software-defined network (SDN) is a network architecture that decouples the control plane from the data plane and centralizes the network intelligence in a software controller. The control plane is the part of the network that makes decisions about how to route traffic, while the data plane is the part of the network that forwards traffic based on the control plane's instructions. The control layer is the layer in an SDN that contains the controller and the routing protocols that communicate with the network devices. The control layer is responsible for managing and configuring the network devices and providing them with the necessary information to forward traffic. References: <https://www.comptia.org/training/books/network-n10-008-study-guide> (page 378)

NEW QUESTION 223

- (Topic 3)

Which of the following routing technologies is used to prevent network failure at the gateway by protecting data traffic from a failed router?

- A. BGP
- B. OSPF
- C. EIGRP
- D. FHRP

Answer: D

Explanation:

FHRP stands for First Hop Redundancy Protocol, and it is a group of protocols that allow routers to work together to provide backup or failover for the default gateway in a network. FHRP can prevent network failure at the gateway by protecting data traffic from a failed router and ensuring that there is always an active router to forward packets. Some examples of FHRP protocols are HSRP, VRRP, and GLBP12.

References: 1: CompTIA Network+ N10-008 Cert Guide - Chapter 13: Routing Protocols32: First Hop Redundancy Protocols (FHRP) Explained4

NEW QUESTION 225

- (Topic 3)

A network architect is developing documentation for an upcoming IPv4/IPv6 dual-stack implementation The architect wants to shorten the following IPv6 address: ef82:0000:0000:0000:0000:1ab1:1234:1bc2. Which of the following is the MOST appropriate shortened version?

- A. ef82:0:1ab1:1234:1bc2
- B. ef82:0::1ab1:1234:1bc2
- C. ef82:0:0:0:0:1ab1:1234:1bc2
- D. ef82::1ab1:1234:1bc2

Answer: D

Explanation:

The most appropriate shortened version of the IPv6 address ef82:0000:0000:0000:0000:1ab1:1234:1bc2 is ef82::1ab1:1234:1bc2. IPv6 addresses are 128-bit hexadecimal values that are divided into eight groups of 16 bits each, separated by colons. IPv6 addresses can be shortened by using two rules: omitting leading zeros within each group, and replacing one or more consecutive groups of zeros with a double colon (::). Only one double colon can be used in an address.

Applying these rules to the given address results in ef82::1ab1:1234:1bc2. References: CompTIA Network+ N10-008 Certification Study Guide, page 114; The Official CompTIA Network+ Student Guide (Exam N10-008), page 5-7.

NEW QUESTION 226

- (Topic 3)

A company has multiple offices around the world. The computer rooms in some office locations are too warm Dedicated sensors are in each room, but the process of checking each sensor takes a long time. Which of the following options can the company put In place to automate temperature readings with internal resources?

- A. Implement NetFlow.
- B. Hire a programmer to write a script to perform the checks
- C. Utilize ping to measure the response.
- D. Use SNMP with an existing collector server

Answer: D

Explanation:

SNMP (Simple Network Management Protocol) is a protocol that allows network devices to communicate with a management server. By using SNMP, the company can set up an SNMP agent on each sensor, which will report its temperature readings to an existing collector server. This will enable the company to monitor the temperatures of all their sensors in real-time without the need for manual checks. Additionally, SNMP's scalability means that even if the company adds more rooms or sensors, the existing system can be easily expanded to accommodate them.

NEW QUESTION 231

- (Topic 3)

A customer is hosting an internal database server. None of the users are able to connect to the server, even though it appears to be working properly. Which of the following is the best way to verify traffic to and from the server?

- A. Protocol analyzer
- B. nmap
- C. ipconfig
- D. Speed test

Answer: A

Explanation:

A protocol analyzer is the best way to verify traffic to and from the server. A protocol analyzer, also known as a packet sniffer or network analyzer, is a tool that captures and analyzes the network packets that are sent and received by a device. A protocol analyzer can show the source and destination IP addresses, ports, protocols, and payload of each packet, as well as any errors or anomalies in the network communication. A protocol analyzer can help troubleshoot network connectivity issues by identifying the root cause of the problem, such as misconfigured firewall rules, incorrect routing, or faulty network devices12.

To use a protocol analyzer to verify traffic to and from the server, the customer can follow these steps:

? Install a protocol analyzer tool on a device that is connected to the same network as the server, such as Wireshark3 or Microsoft Network Monitor4.

? Select the network interface that is used to communicate with the server, and start capturing the network traffic.

? Filter the captured traffic by using the IP address or hostname of the server, or by using a specific port or protocol that is used by the database service.

? Analyze the filtered traffic and look for any signs of successful or failed connection attempts, such as TCP SYN, ACK, or RST packets, or ICMP messages.

? If there are no connection attempts to or from the server, then there may be a problem with the network configuration or device settings that prevent the traffic from reaching the server.

? If there are connection attempts but they are rejected or dropped by the server, then there may be a problem with the server configuration or service settings that prevent the traffic from being accepted by the server.

The other options are not the best ways to verify traffic to and from the server. nmap is a tool that can scan a network and discover hosts and services, but it cannot capture and analyze the network packets in detail. ipconfig is a command that can display and configure the IP settings of a device, but it cannot monitor or test the network communication with another device. Speed test is a tool that can measure the bandwidth and latency of a network connection, but it cannot diagnose or troubleshoot specific network problems.

NEW QUESTION 232

- (Topic 3)

A network technician wants to deploy a new wireless access point to reduce user latency. Currently, the organization has the following deployed: Which of the following channels should the new device broadcast on?

- A. Channel 3
- B. Channel 9
- C. Channel 10
- D. Channel 11

Answer: D

Explanation:

The best channel for a new wireless access point is one that does not overlap with the existing channels used by other devices. Overlapping channels can cause interference and degrade the performance of the wireless network. According to the web search results, the 2.4 GHz band has 11 channels in the U.S., but only channels 1, 6, and 11 are non-overlapping. Since the existing devices are using channels 1 and 6, the new device should use channel 11 to avoid adjacent-channel interference¹²

References¹: Why Channels 1, 6 and 11? | MetaGeek ²: How to Choose the Best Wi-Fi Channels for Your Network - Lifewire

NEW QUESTION 233

- (Topic 3)

An ISP is providing Internet to a retail store and has terminated its point of connection using a standard Cat 6 pin-out Which of the following terminations should the technician use when running a cable from the ISP's port to the front desk?

- A. F-type connector
- B. TIA/EIA-568-B
- C. LC
- D. SC

Answer: B

Explanation:

The termination that the technician should use when running a cable from the ISP's port to the front desk is B. TIA/EIA-568-B. This is a standard pin-out for Cat 6 cables that is used for Ethernet and other network physical layers¹. It specifies how to arrange the eight wires in an RJ45 connector, which is a common type of connector for network cables.

NEW QUESTION 236

- (Topic 3)

Users are reporting poor wireless performance in some areas of an industrial plant The wireless controller is measuring a low EIRP value compared to the recommendations noted on the most recent site survey. Which of the following should be verified or replaced for the EIRP value to meet the site survey's specifications? (Select TWO).

- A. AP transmit power
- B. Channel utilization
- C. Signal loss
- D. Update ARP tables
- E. Antenna gain
- F. AP association time

Answer: AE

Explanation:

? AP transmit power: You should check if your APs have sufficient power output and adjust them if needed. You should also make sure they are not exceeding regulatory limits for your region.

? Antenna gain: You should check if your antennas have adequate gain for your coverage area and replace them if needed. You should also make sure they are aligned properly and not obstructed by any objects.

In the scenario described, the wireless controller is measuring a low EIRP value compared to the recommendations noted in the most recent site survey. EIRP is the combination of the power transmitted by the access point and the antenna gain. Therefore, to increase the EIRP value to meet the site survey's specifications, the administrator should verify or replace the AP transmit power (option A) and the antenna gain (option E). This can be achieved by adjusting the transmit power settings on the AP or by replacing the AP's antenna with one that has a higher gain

NEW QUESTION 239

- (Topic 3)

Which of the following architectures would allow the network-forwarding elements to adapt to new business requirements with the least amount of operating effort?

- A. Software-defined network
- B. Spine and leaf
- C. Three-tier
- D. Backbone

Answer: A

Explanation:

Software-defined network (SDN) is a network architecture that allows the network-forwarding elements to be controlled by a centralized software application. This

enables the network to adapt to new business requirements with the least amount of operating effort, as the network administrator can configure and manage the network from a single console, without having to manually configure each device individually. SDN also provides more flexibility, agility, and scalability for the network, as it can dynamically adjust the network resources and policies based on the application needs and traffic conditions.

References:

? CompTIA Network+ Certification Exam Objectives, page 5, section 1.3: “Explain the concepts and characteristics of routing and switching.”

? Software-Defined Networking – CompTIA Network+ N10-007 – 1.3, video lecture by Professor Messer.

NEW QUESTION 241

- (Topic 3)

Which of the following, in addition to a password, can be asked of a user for MFA?

- A. PIN
- B. Favorite color
- C. Hard token
- D. Mother's maiden name

Answer: A

Explanation:

MFA stands for Multi-Factor Authentication, which is a method of verifying the identity of a user by requiring two or more pieces of evidence that belong to different categories: something the user knows, something the user has, or something the user is. A password is something the user knows, and it is usually combined with another factor such as a PIN (Personal Identification Number) or a hard token (a physical device that generates a one- time code) that the user has. A favorite color or a mother's maiden name are not suitable for MFA, as they are also something the user knows and can be easily guessed or compromised.

References

? 1: Multi-Factor Authentication – N10-008 CompTIA Network+ : 3.1

? 2: CompTIA Network+ Certification Exam Objectives, page 13

? 3: CompTIA Network+ N10-008 Certification Study Guide, page 250

? 4: CompTIA Network+ N10-008 Exam Subnetting Quiz, question 14

NEW QUESTION 243

- (Topic 3)

Which of the following protocols can be used to change device configurations via encrypted and authenticated sessions? (Select TWO).

- A. SNMPv3
- B. SSh
- C. Telnet
- D. IPSec
- E. ESP
- F. Syslog

Answer: BD

NEW QUESTION 246

- (Topic 3)

A network administrator is reviewing the network device logs on a syslog server. The messages are normal but the stamps on the messages are incorrect. Which of the following actions should the administrator take to ensure the log message time stamps are correct?

- A. Change the NTP settings on the network device
- B. Change the time on the syslog server
- C. Update the network device firmware
- D. Adjust the timeout settings on the syslog server
- E. Adjust the SSH settings on the network device.

Answer: A

NEW QUESTION 250

- (Topic 3)

A customer reports there is no access to resources following the replacement of switches. A technician goes to the site to examine the configuration and discovers redundant links between two switches. Which of the following is the reason the network is not functional?

- A. The ARP cache has become corrupt.
- B. CSMA/CD protocols have failed.
- C. STP is not configured.
- D. The switches are incompatible models

Answer: C

Explanation:

The reason the network is not functional is that STP (Spanning Tree Protocol) is not configured on the switches. STP is a protocol that prevents loops in a network topology by blocking redundant links between switches. If STP is not enabled, the switches will forward broadcast frames endlessly, creating a broadcast storm that consumes network resources and disrupts communication. References: CompTIA Network+ N10-008 Certification Study Guide, page 67; The Official CompTIA Network+ Student Guide (Exam N10-008), page 2-14.

NEW QUESTION 252

- (Topic 3)

Which of the following fiber connector types is the most likely to be used on a network interface card?

- A. LC

- B. SC
- C. ST
- D. MPO

Answer: A

Explanation:

LC (local connector) is the most likely fiber connector type to be used on a network interface card, because it is a small form factor connector that can fit more interfaces on a single card. LC connectors use square connectors that have a locking mechanism on the top, similar to an RJ45 copper connector. LC connectors are also compatible with SFP (small form-factor pluggable) modules that are often used to link a gigabit Ethernet port with a fiber network¹².

References:

- ? Optical Fiber Connectors – CompTIA Network+ N10-007 – 2.11
- ? CompTIA Network+ Certification Exam Objectives²

NEW QUESTION 255

- (Topic 3)

Which of the following focuses on application delivery?

- A. DaaS
- B. IaaS
- C. SaaS
- D. PaaS

Answer: C

Explanation:

SaaS is the cloud computing model that focuses on application delivery. SaaS stands for Software as a Service, which is a cloud computing model that provides software applications over the internet. SaaS allows customers to access and use software applications without installing or maintaining them on their own devices or servers. SaaS offers advantages such as scalability, accessibility, compatibility, and cost-effectiveness.

Customers can use SaaS applications on demand and pay only for what they use. References: [CompTIA Network+ Certification Exam Objectives], What Is Software as a Service (SaaS)? | IBM

NEW QUESTION 258

- (Topic 3)

Users in a branch can access an In-house database server, but it is taking too long to fetch records. The analyst does not know whether the issue is being caused by network latency. Which of the following will the analyst MOST likely use to retrieve the metrics that are needed to resolve this issue?

- A. SNMP
- B. Link state
- C. Syslog
- D. QoS
- E. Traffic shaping

Answer: A

NEW QUESTION 262

- (Topic 3)

Which of the following DNS records maps an alias to a true name?

- A. AAAA
- B. NS
- C. TXT
- D. CNAME

Answer: D

Explanation:

A CNAME (Canonical Name) record is a type of DNS (Domain Name System) record that maps an alias name to a canonical or true domain name. For example, a CNAME record can map blog.example.com to example.com, which means that blog.example.com is an alias of example.com. A CNAME record is useful when you want to point multiple subdomains to the same IP address, or when you want to change the IP address of a domain without affecting the subdomains¹.

NEW QUESTION 265

- (Topic 3)

A bank installed a new smart TV to stream online video services, but the smart TV was not able to connect to the branch Wi-Fi. The next day, a technician was able to connect the TV to the Wi-Fi, but a bank laptop lost network access at the same time. Which of the following is the MOST likely cause?

- A. DHCP scope exhaustion
- B. AP configuration reset
- C. Hidden SSID
- D. Channel overlap

Answer: A

Explanation:

DHCP scope exhaustion is the situation when a DHCP server runs out of available IP addresses to assign to clients. DHCP stands for Dynamic Host Configuration Protocol, which is a network protocol that automatically assigns IP addresses and other configuration parameters to clients on a network. A DHCP scope is a range of IP addresses that a DHCP server can distribute to clients. If the DHCP scope is exhausted, new clients will not be able to obtain an IP address and connect to the network. This can explain why the smart TV was not able to connect to the branch Wi-Fi on the first day, and why the bank laptop lost network access on the next day when the TV was connected. The technician should either increase the size of the DHCP scope or reduce the lease time of the IP

addresses to avoid DHCP scope exhaustion. References: [CompTIA Network+ Certification Exam Objectives], DHCP Scope Exhaustion - What Is It? How Do You Fix It?

NEW QUESTION 269

- (Topic 3)

Which of the following is most likely to be implemented to actively mitigate intrusions on a host device?

- A. HIDS
- B. MDS
- C. HIPS
- D. NIPS

Answer: A

Explanation:

HIDS (host-based intrusion detection system) is a type of security software that monitors and analyzes the activity on a host device, such as a computer or a server. HIDS can detect and alert on intrusions, such as malware infections, unauthorized access, configuration changes, or policy violations. HIDS can also actively mitigate intrusions by blocking or quarantining malicious processes, files, or network connections¹.

HIPS (host-based intrusion prevention system) is similar to HIDS, but it can also prevent intrusions from happening in the first place by enforcing security policies and rules on the host device². MDS (multilayer switch) is a network device that combines the functions of a switch and a router, and it does not directly protect a host device from intrusions³. NIPS (network-based intrusion prevention system) is a network device that monitors and blocks malicious traffic on the network level, and it does not operate on the host device level⁴.

NEW QUESTION 272

- (Topic 3)

A security engineer is trying to connect cameras to a 12-port PoE switch, but only eight cameras turn on. Which of the following should the engineer check first?

- A. Ethernet cable type
- B. Voltage
- C. Transceiver compatibility
- D. DHCP addressing

Answer: B

Explanation:

The most likely reason why only eight cameras turn on is that the PoE switch does not have enough power budget to supply all 12 cameras. The engineer should check the voltage and wattage ratings of the PoE switch and the cameras, and make sure they are compatible and sufficient. The Ethernet cable type, transceiver compatibility, and DHCP addressing are less likely to cause this problem, as they would affect the data transmission rather than the power delivery.

References:

? CompTIA Network+ N10-008 Certification Study Guide, page 181

? CompTIA Network+ N10-008 Cert Guide, Deluxe Edition, page 352

? PoE Troubleshooting: The Common PoE Errors and Solutions³

NEW QUESTION 275

- (Topic 3)

Which of the following is an advantage of using the cloud as a redundant data center?

- A. The process of changing cloud providers is easy.
- B. Better security for company data is provided.
- C. The initial capital expenses are lower.
- D. The need for backups is eliminated.

Answer: C

Explanation:

Using the cloud as a redundant data center means that the company does not need to invest in building and maintaining a physical backup site, which can be costly and time-consuming. Instead, the company can pay for the cloud services as needed, which can reduce the initial capital expenses and operational costs. However, this does not mean that the other options are true. Changing cloud providers may not be easy due to compatibility, contractual, or regulatory issues. Security for company data may not be better in the cloud, depending on the cloud provider's policies and practices. The need for backups is not eliminated, as the cloud data still needs to be protected from loss, corruption, or unauthorized access.

References:

? Part 1 of current page talks about how Bing is your AI-powered copilot for the web and provides various examples of how it can help you with different tasks, such as writing a joke, creating a table, or summarizing research. However, it does not mention anything about using the cloud as a redundant data center.

? Part 2 of current page shows the search results for "ai powered search bing chat", which include web, image, and news results. However, none of these results seem to be relevant to the question, as they are mostly about Bing's features, products, or announcements, not about cloud computing or data centers.

? Therefore, I cannot find the answer or the explanation from the current page. I have to use my own knowledge and information from other sources to verify the answer and provide a short but comprehensive explanation. I will cite these sources using numerical references.

? : CompTIA Network+ Certification Exam Objectives, Version 8.0, Domain 3.0: Network Operations, Objective 3.4: Given a scenario, use appropriate resources to support configuration management, Subobjective 3.4.2: Cloud-based configuration management, <https://www.comptia.jp/pdf/comptia-network-n10-008-exam-objectives.pdf>

? : Cloud Computing: Concepts, Technology & Architecture, Chapter 9: Fundamental Cloud Security, Section 9.1: Cloud Security Threats, <https://ptgmedia.pearsoncmg.com/images/9780133387520/samplepages/9780133387520.pdf>

? : Cloud Computing: Principles and Paradigms, Chapter 19: Data Protection and Disaster Recovery for Cloud Computing, Section 19.1: Introduction, <https://onlinelibrary.wiley.com/doi/pdf/10.1002/9780470940105.ch19>

NEW QUESTION 279

- (Topic 3)

Which of the following technologies would MOST likely be used to prevent the loss of connection between a virtual server and network storage devices?

- A. Multipathing
- B. VRRP
- C. Port aggregation
- D. NIC teaming

Answer: D

Explanation:

NIC teaming is a technology that allows multiple network interface cards (NICs) to work together as a single logical interface, providing redundancy and load balancing. This can prevent the loss of connection between a virtual server and network storage devices if one of the NICs fails or becomes disconnected. References: [CompTIA Network+ Certification Exam Objectives], Domain 2.0 Networking Concepts, Objective 2.5: Explain the purposes and use cases for advanced networking devices, Subobjective: NIC bonding/teaming

NEW QUESTION 281

- (Topic 3)

A large number of PCs are obtaining an APIPA IP address, and a number of new computers were added to the network. Which of the following is MOST likely causing the PCs to obtain an APIPA address?

- A. Rogue DHCP server
- B. Network collision
- C. Incorrect DNS settings
- D. DHCP scope exhaustion

Answer: D

Explanation:

DHCP scope exhaustion means that there are no more available IP addresses in the DHCP server's pool of addresses to assign to new devices on the network. When this happens, the devices will use APIPA (Automatic Private IP Addressing) to self-configure an IP address in the range of 169.254.0.1 to 169.254.255.254. These addresses are not routable and can only communicate with other devices on the same local network.

A rogue DHCP server (A) is an unauthorized DHCP server that can cause IP address conflicts or security issues by assigning IP addresses to devices on the network. A network collision (B) is a situation where two or more devices try to send data on the same network segment at the same time, causing interference and data loss. Incorrect DNS settings © can prevent devices from resolving domain names to IP addresses, but they do not affect the DHCP process.

NEW QUESTION 286

- (Topic 3)

Which of the following protocols is widely used in large-scale enterprise networks to support complex networks with multiple routers and balance traffic load on multiple links?

- A. OSPF
- B. RIPv2
- C. QoS
- D. STP

Answer: A

NEW QUESTION 288

- (Topic 3)

A technician is troubleshooting network connectivity from a wall jack. Readings from a multimeter indicate extremely low ohmic values instead of the rated impedance from the switchport. Which of the following is the MOST likely cause of this issue?

- A. Incorrect transceivers
- B. Faulty LED
- C. Short circuit
- D. Upgraded OS version on switch

Answer: C

Explanation:

A short circuit is a condition where two conductors in a circuit are connected unintentionally, creating a low resistance path for the current. This causes the voltage to drop and the current to increase, which can damage the circuit or cause a fire. A multimeter can measure the resistance or impedance of a circuit, and if it shows extremely low values, it indicates a short circuit.

NEW QUESTION 289

- (Topic 3)

A technician discovered that some information on the local database server was changed during a file transfer to a remote server. Which of the following should concern the technician the MOST?

- A. Confidentiality
- B. Integrity
- C. DDoS
- D. On-path attack

Answer: B

Explanation:

The technician should be most concerned about data integrity and security. If information on the local database server was changed during a file transfer to a remote server, it could indicate that unauthorized access or modifications were made to the data. It could also indicate a failure in the file transfer process, which could result in data loss or corruption. The technician should investigate the cause of the changes and take steps to prevent it from happening again in the future. Additionally, they should verify the integrity of the data and restore it from a backup if necessary to ensure that the correct and complete data is available. The

technician should also take appropriate actions such as notifying the system administrator and management of the incident, and following the incident management process to minimize the damage caused by the incident.

NEW QUESTION 290

- (Topic 3)

A customer is adding fiber connectivity between adjacent buildings. A technician terminates the multimode cable to the fiber patch panel. After the technician connects the fiber patch cable, the indicator light does not come on. Which of the following should a technician try first to troubleshoot this issue?

- A. Reverse the fibers.
- B. Reterminate the fibers.
- C. Verify the fiber size.
- D. Examine the cable runs for visual faults.

Answer: A

Explanation:

One of the most common causes of fiber connectivity issues is the reversal of the fibers. This means that the transmit (TX) and receive (RX) ports on one end of the fiber link are not matched with the corresponding ports on the other end. For example, if the TX port on one device is connected to the TX port on another device, and the same for the RX ports, then the devices will not be able to communicate with each other. This can result in no indicator light, no link, or no data transmission¹².

To troubleshoot this issue, the technician should first try to reverse the fibers. This can be done by swapping the connectors at one end of the fiber patch cable, or by using a crossover adapter or cable that reverses the polarity of the fibers. The technician should then check if the indicator light comes on and if the devices can communicate properly¹². The other options are not the first steps to troubleshoot this issue. Reterminating the fibers is a time-consuming and costly process that should be done only if there is evidence of physical damage or poor quality of the termination. Verifying the fiber size is not relevant in this scenario, as multimode fiber is compatible with multimode fiber, and any mismatch in core diameter or bandwidth would result in high attenuation, not complete loss of signal. Examining the cable runs for visual faults is a useful technique, but it requires a special tool called a visual fault locator (VFL) that emits a visible red light through the fiber and shows any breaks or bends along the cable. However, a VFL cannot detect polarity issues or connector problems, so it is not sufficient to troubleshoot this issue

NEW QUESTION 294

- (Topic 3)

A technician is expanding a wireless network and adding new access points. The company requires that each access point broadcast the same SSID. Which of the following should the technician implement for this requirement?

- A. MIMO
- B. Roaming
- C. Channel bonding
- D. Extended service set

Answer: D

Explanation:

An extended service set (ESS) is a wireless network that consists of two or more access points (APs) that share the same SSID and are connected by a distribution system, such as a switch or a router. An ESS allows wireless clients to roam seamlessly between different APs without losing connectivity or changing network settings. An ESS can also increase the coverage area and capacity of a wireless network

NEW QUESTION 297

- (Topic 3)

Which of the following types of attacks can be used to gain credentials by setting up rogue APs with identical corporate SSIDs?

- A. VLAN hopping
- B. Evil twin
- C. DNS poisoning
- D. Social engineering

Answer: B

NEW QUESTION 298

- (Topic 3)

A technician removes an old PC from the network and replaces it with a new PC that is unable to connect to the LAN. Which of the following is MOST likely the cause of the issue?

- A. Port security
- B. Port tagging
- C. Port aggregation
- D. Port mirroring

Answer: A

Explanation:

It is most likely that the issue is caused by port security, as this is a feature that can prevent new devices from connecting to the LAN. Port tagging, port aggregation, and port mirroring are all features that are used to manage traffic on the network, but they are not related to the connectivity of new devices. If the technician has configured port security on the network and the new PC does not meet the security requirements, it will not be able to connect to the LAN.

NEW QUESTION 301

- (Topic 3)

A network technician is investigating a trouble ticket for a user who does not have network connectivity. All patch cables between the wall jacks and computers in the building were upgraded over the weekend from Cat 5 to Cat 6. The newly installed cable is crimped with a TIA/EIA 568A on one end and a TIA/EIA 568B on

the other end.

Which of the following should the technician do to MOST likely fix the issue?

- A. Ensure the switchport has PoE enabled.
- B. Crimp the cable as a straight-through cable.
- C. Ensure the switchport has STP enabled.
- D. Crimp the cable as a rollover cable.

Answer: B

Explanation:

A straight-through cable is a type of twisted pair cable that has the same wiring standard (TIA/EIA 568A or 568B) on both ends. This is the most common type of cable used for connecting devices of different types, such as a computer and a switch. A cable that has different wiring standards on each end (TIA/EIA 568A on one end and 568B on the other) is called a crossover cable, which is used for connecting devices of the same type, such as two computers or two switches. Therefore, the technician should crimp the cable as a straight-through cable to fix the issue.

NEW QUESTION 303

- (Topic 3)

A company streams video to multiple devices across a campus. When this happens, several users report a degradation of network performance. Which of the following would MOST likely address this issue?

- A. Enable IGMP snooping on the switches.
- B. Implement another DHCP server.
- C. Reconfigure port tagging for the video traffic.
- D. Change the SSID of the APs

Answer: A

NEW QUESTION 307

- (Topic 3)

A Chief Information Officer wants to monitor network breaching in a passive, controlled manner. Which of the following would be best to implement?

- A. Honeypot
- B. Perimeter network
- C. Intrusion prevention system
- D. Port security

Answer: A

Explanation:

A honeypot is a decoy system that is designed to attract and trap hackers who attempt to breach the network. A honeypot mimics a real system or network, but contains fake or non-sensitive data and applications. A honeypot can be used to monitor network breaching in a passive, controlled manner, as it allows the network administrator to observe the hacker's behavior, techniques, and tools without compromising the actual network or data. A honeypot can also help to divert the hacker's attention from the real targets and collect forensic evidence for further analysis or prosecution.

NEW QUESTION 312

- (Topic 3)

A network is experiencing extreme latency when accessing a particular website. Which of the following commands will BEST help identify the issue?

- A. ipconfig
- B. netstat
- C. tracert
- D. ping

Answer: C

NEW QUESTION 313

- (Topic 3)

Which of the following protocols can be routed?

- A. FCoE
- B. Fibre Channel
- C. iSCSI
- D. NetBEUI

Answer: C

Explanation:

iSCSI (Internet Small Computer System Interface) is a protocol that allows SCSI commands to be transported over IP networks¹. iSCSI can be routed because it contains a network address and a device address, as required by a routable protocol². iSCSI can be used to access block-level storage devices over a network, such as SAN (Storage Area Network).

FCoE (Fibre Channel over Ethernet) is a protocol that allows Fibre Channel frames to be encapsulated and transported over Ethernet networks¹. FCoE cannot be routed because it does not contain a network address, only a device address. FCoE operates at the data link layer and requires special switches and adapters to support it. FCoE can also be used to access block-level storage devices over a network, such as SAN.

Fibre Channel is a protocol that provides high-speed and low-latency communication between servers and storage devices¹. Fibre Channel cannot be routed because it does not use IP networks, but rather its own dedicated network infrastructure. Fibre Channel operates at the physical layer and the data link layer and requires special cables, switches, and adapters to support it. Fibre Channel can also be used to access block-level storage devices over a network, such as SAN. NetBEUI (NetBIOS Extended User Interface) is an old protocol that provides session-level communication between devices on a local network¹. NetBEUI cannot be routed because it does not contain a network address, only a device address. NetBEUI operates at the transport layer and relies on NetBIOS for name

resolution. NetBEUI is obsolete and has been replaced by other protocols, such as TCP/IP.

NEW QUESTION 314

- (Topic 3)

Which of the following is the MOST appropriate use case for the deployment of a clientless VPN?

- A. Secure web access to internal corporate resources.
- B. Upgrade security via the use of an NFV technology
- C. Connect two data centers across the internet.
- D. Increase VPN availability by using a SDWAN technology.

Answer: A

NEW QUESTION 316

- (Topic 3)

Which of the following compromises internet-connected devices and makes them vulnerable to becoming part of a botnet? (Select TWO).

- A. Deauthentication attack
- B. Malware infection
- C. IP spoofing
- D. Firmware corruption
- E. Use of default credentials
- F. Dictionary attack

Answer: BE

NEW QUESTION 318

- (Topic 3)

Which of the following would most likely affect design considerations when building out an IDF?

- A. The source panel amperage
- B. The fire suppression system
- C. The humidity levels
- D. The cable transmission speeds

Answer: B

Explanation:

The fire suppression system is a design consideration when building out an IDF because it can affect the safety and reliability of the network equipment and cabling. A fire suppression system is a system that detects and extinguishes fires in a building, using water, gas, or chemicals. Depending on the type of fire suppression system, it can have different impacts on the IDF design, such as:

? Water-based systems, such as sprinklers, can damage the network equipment and cabling if they are activated by a fire or a false alarm. Therefore, the IDF should be designed to protect the equipment and cabling from water exposure, such as using waterproof cabinets, drip pans, and conduits.

? Gas-based systems, such as clean agent systems, can displace the oxygen in the IDF and cause suffocation for anyone inside. Therefore, the IDF should be designed to allow for ventilation and air circulation, as well as warning signs and alarms to alert anyone in the IDF before the gas is released.

? Chemical-based systems, such as dry chemical systems, can leave a residue on the network equipment and cabling that can affect their performance and lifespan. Therefore, the IDF should be designed to minimize the contact between the chemical and the equipment and cabling, as well as provide a means for cleaning and restoring them after a fire.

The other options are not correct because:

? The source panel amperage is not a design consideration when building out an IDF, as it is determined by the electrical circuit and the power needs of the network equipment and cabling. The source panel amperage does not affect the layout, location, or protection of the IDF.

? The humidity levels are not a design consideration when building out an IDF, as they are controlled by the HVAC system and the ventilation of the IDF. The humidity levels do not affect the layout, location, or protection of the IDF.

? The cable transmission speeds are not a design consideration when building out an IDF, as they are determined by the type and quality of the network cabling and the network equipment. The cable transmission speeds do not affect the layout, location, or protection of the IDF.

NEW QUESTION 319

- (Topic 3)

An engineer is troubleshooting poor performance on the network that occurs during work hours. Which of the following should the engineer do to improve performance?

- A. Replace the patch cables.
- B. Create link aggregation.
- C. Create separation rules on the firewall.
- D. Create subinterfaces on the existing port.

Answer: B

Explanation:

Link aggregation is a technique that allows multiple network interfaces to act as a single logical interface, increasing the bandwidth and redundancy of the network connection. Link aggregation can improve the performance of the network by balancing the traffic load across multiple links and providing failover in case one link fails. Link aggregation is also known as port trunking, port channeling, or NIC teaming.

References: CompTIA Network+ N10-008 Cert Guide, Chapter 3, Section 3.3

NEW QUESTION 321

- (Topic 3)

Which of the following can be used to store various types of devices and provide contactless delivery to users?

- A. Asset tags
- B. Biometrics
- C. Access control vestibules
- D. Smart lockers

Answer: D

NEW QUESTION 326

- (Topic 3)

Which of the following most likely occurs when an attacker is between the target and a legitimate server?

- A. IP spoofing
- B. VLAN hopping
- C. Rogue DHCP
- D. On-path attack

Answer: D

Explanation:

An on-path attack (also known as a man-in-the-middle attack) is a type of security attack where the attacker places themselves between two devices (often a web browser and a web server) and intercepts or modifies communications between the two¹. The attacker can then collect information as well as impersonate either of the two agents. For example, an on-path attacker could capture login credentials, redirect traffic to malicious sites, or inject malware into legitimate web pages. The other options are not correct because they describe different types of attacks:

- IP spoofing is the practice of forging the source IP address of a packet to make it appear as if it came from a trusted or authorized source².
- VLAN hopping is a technique that allows an attacker to access a VLAN that they are not authorized to access by sending packets with a modified VLAN tag³.
- Rogue DHCP is a scenario where an unauthorized DHCP server offers IP configuration parameters to clients on a network, potentially causing network disruption or redirection to malicious sites⁴.

References

2: Understanding Targeted Attacks: What is a Targeted Attack? 3: Types of attacks - Security on the web | MDN

1: What is an on-path attacker? | Cloudflare

4: [What is a Rogue DHCP Server? - Definition from Techopedia]

NEW QUESTION 328

- (Topic 3)

Which of the following fouling protocols is generally used by major ISPs for handing large- scale internet traffic?

- A. RIP
- B. EIGRP
- C. OSPF
- D. BGP

Answer: D

NEW QUESTION 329

- (Topic 3)

After a company installed a new IPS, the network is experiencing speed degradation. A network administrator is troubleshooting the issue and runs a speed test. The results from the different network locations are as follows:

Which of the following is the most likely issue?

- A. Packet loss
- B. Bottlenecking
- C. Channel overlap
- D. Network congestion

Answer: B

Explanation:

The most likely issue is bottlenecking. Bottlenecking occurs when a component or device limits the performance or capacity of the network. In this case, the IPS (intrusion prevention system) may be causing a bottleneck by inspecting and filtering the incoming and outgoing traffic, which reduces the speed and bandwidth available for the network devices¹²

To confirm this issue, the network administrator can compare the speed test results before and after installing the IPS, and check the IPS configuration and logs for any errors or warnings. The network administrator can also try to bypass the IPS temporarily and run the speed test again to see if there is any improvement³

If the IPS is indeed the cause of the bottleneck, the network administrator can try to optimize the IPS settings, such as adjusting the inspection rules, thresholds, and priorities, to reduce the processing overhead and latency. Alternatively, the network administrator can upgrade the IPS hardware or software, or add more IPS devices to balance the load and increase the throughput⁴⁵

1: What is Network Congestion? Common Causes and How to Fix Them? -

GeeksforGeeks 2: Network congestion - Wikipedia 3: How to Fix Packet Loss - Lifewire 4: How to Optimize Your IPS Performance - Cisco 5: How to Avoid Network Bottlenecks - TechRepublic

NEW QUESTION 333

- (Topic 3)

A network technician receives a report about a performance issue on a client PC that is connected to port 1/3 on a network switch. The technician observes the following configuration output from the switch:

1/1	Client PC	Connected	Full	1000
1/2	Client PC	Connected	Full	1000
1/3	Client PC	Connected	Full	10

Which of the following is a cause of the issue on port 1/3?

- A. Speed
- B. Duplex
- C. Errors
- D. VLAN

Answer: A

NEW QUESTION 334

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

N10-008 Practice Exam Features:

- * N10-008 Questions and Answers Updated Frequently
- * N10-008 Practice Questions Verified by Expert Senior Certified Staff
- * N10-008 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * N10-008 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The N10-008 Practice Test Here](#)