

## NS0-184 Dumps

### NetApp Certified Storage Installation Engineer - ONTAP

<https://www.certleader.com/NS0-184-dumps.html>



#### NEW QUESTION 1

Click the Exhibit button.

## NetApp CN1610 (10GbE)



## Cisco Nexus 3132Q-V (40GbE)

A customer wants to replace their ONTAP cluster CN1610 switches with Cisco Nexus 3132Q-V switches. They want to perform a non-disruptive upgrade. Referring to the exhibit, which cable will be required to non-disruptively migrate to the new switches?

- A. a 10GbE SFP+ to SFP+ cable
- B. a 100GbE QSFP28+ to 4x25GbE SFP28+ cable
- C. a 40GbE QSFP+ to QSFP+ cable
- D. a 40GbE QSFP+ to 4x10GbE SFP+ cable

**Answer: B**

#### Explanation:

Reference: [https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/7-x/upgrade/guide/b\\_Cisco\\_Nexus\\_9000\\_Series\\_NXOS\\_Software\\_Upgrade\\_and\\_Downgrade\\_Guide\\_Release\\_7x/b\\_Cisco\\_Nexus\\_9000\\_Series\\_NXOS\\_Software\\_Upgrade\\_and\\_Downgrade\\_Guide\\_Release\\_7x\\_chapter\\_010.html](https://www.cisco.com/c/en/us/td/docs/switches/datacenter/nexus9000/sw/7-x/upgrade/guide/b_Cisco_Nexus_9000_Series_NXOS_Software_Upgrade_and_Downgrade_Guide_Release_7x/b_Cisco_Nexus_9000_Series_NXOS_Software_Upgrade_and_Downgrade_Guide_Release_7x_chapter_010.html)

#### NEW QUESTION 2

What is a benefit of ONTAP System Manager?

- A. System Manager provides simplified management of service processor tasks.
- B. System Manager easily configures and provisions storage.
- C. System Manager easily configures and provisions StorageGRID.
- D. System Manager provides simplified management of E-Series.

**Answer: B**

#### NEW QUESTION 3


You are installing a new ONTAP 9.8 cluster by using System Manager Guided Setup. In this scenario, which IP address is optional?

- A. node A IP address
- B. node B IP address
- C. gateway IP address
- D. cluster IP address

**Answer: C**

#### NEW QUESTION 4

Click the Exhibit button.

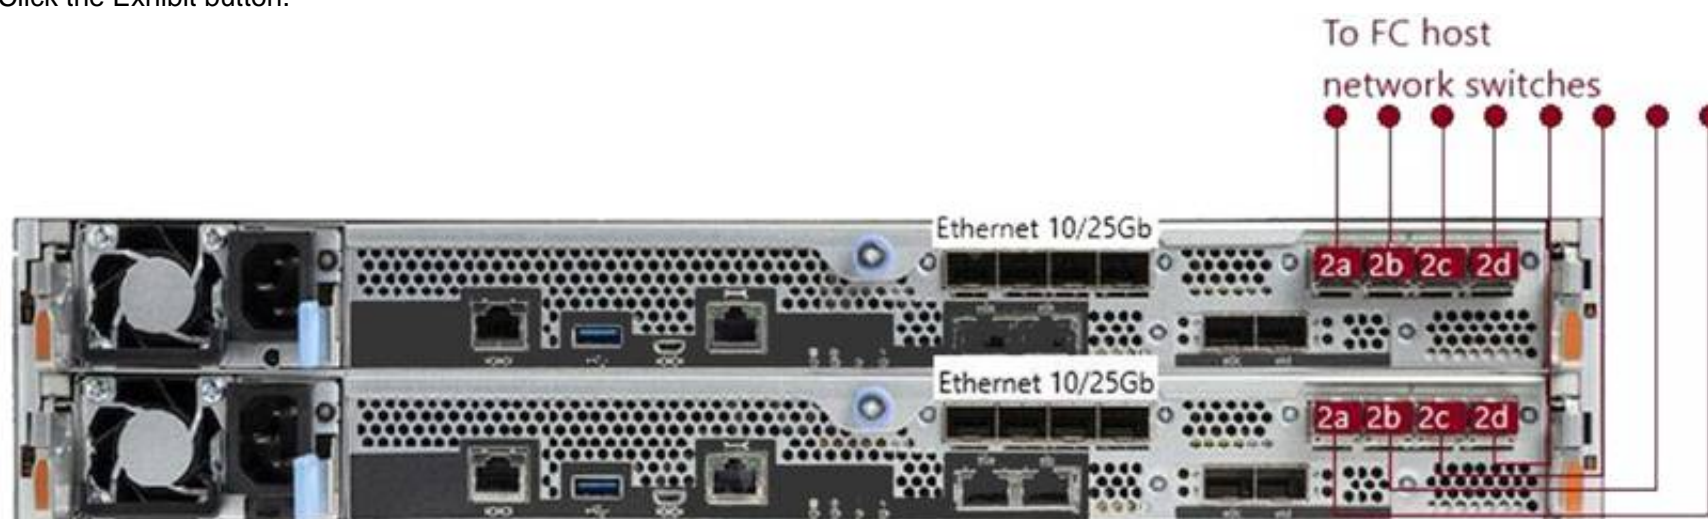

Referring to the exhibit, you installed a new AFF A250 HA system with FC at a customer site. The customer asks how many ports can be used for the Ethernet host connections. In this scenario, what would you tell the customer?

- A. 4
- B. 8
- C. 10
- D. 12

Answer: D

#### NEW QUESTION 5

You are adding new controllers to an existing cluster. As part of the upgrade process, you have updated the BES-53248 cluster switches. In this scenario.

Which two commands would you use to verify a healthy cluster after the upgrade? (Choose two.)

- A. network port show -ipspace Cluster
- B. network interface show -vserver Cluster
- C. network device-discovery show -protocol cdp
- D. network interface show -vserver Cluster -fields auto-revert

Answer: AB

#### NEW QUESTION 6

You configured AutoSupport and are trying to send a full AutoSupport message to NetApp. You use the autosupport history show command and see the output shown in the exhibit. The customer confirms that the AutoSupport settings are correct.

```
cluster::> system node autosupport history show -node node1
```

Node	Seq Num	Destination	Status	Attempt Count
node1	1	smtp	re-queued	13
		http	ignored	15
		https	failed	15

Which two actions will solve this issue? (Choose two.)

- A. The customer needs to enable AutoSupport for both nodes.
- B. The customer needs to exclude the two nodes from the attachment-size limitation.
- C. The customer needs to change the transport protocol to HTTP.
- D. The customer needs to white-list the two nodes on their mail server.

Answer: AC

#### NEW QUESTION 7

A storage administrator is trying to upgrade a pair of FAS2520s with internal SATA storage to a new 2-node FAS8300 cluster. The storage administrator wants to preserve the existing data.

In this scenario, which two capabilities are available to the storage administrator? (Choose two.)

- A. the ability to move the volumes from the old nodes to the new nodes
- B. the ability to pull out the tray of internal disks of the FAS2520s and reseal the tray in the internal storage of the FAS8300s
- C. the ability to create a 4-node MetroCluster across the four nodes
- D. the ability to convert the FAS2520s to disk shelves and attach them to the new nodes

Answer: CD

#### NEW QUESTION 8

On which type of network interfaces are the cluster interconnect LIFs created?

- A. on an FC or FCoE port
- B. on an interface group
- C. on a UTA port shared with other LIFs
- D. on a physical port

Answer: B

#### NEW QUESTION 9

After the installation of a new ONTAP 9.8 cluster, you have to verify if AutoSupport works.

In this scenario, which two commands would you use to accomplish this task? (Choose two.)

- A. system node autosupport history show
- B. system node autosupport check show
- C. system node autosupport destination show
- D. system node autosupport invoke

Answer: AB

#### NEW QUESTION 10

You are setting up a peer relationship between two ONTAP clusters.

In this scenario, which two statements are true regarding authentication?

- A. Peering authentication status can be verified with the cluster peer show command.
- B. Peering authentication can be configured using LDAP users and groups.
- C. Peering authentication is required before enabling peering encryption.
- D. Peering authentication can use an ONTAP generated passphrase.

**Answer:** AD

#### NEW QUESTION 10

You want to use the NetAppDocs tool to collect information on a newly configured ONTAP 9.8 cluster and to generate a Word document with the details of the cluster configuration.

Which two data sources would you use to collect the necessary data? (Choose two.)

- A. Active IQ Digital Advisor
- B. Active IQ Unified Manager
- C. ONTAP Cluster
- D. AutoSupport packages

**Answer:** BC

#### NEW QUESTION 14

An administrator issued the cluster setup command and configured a 2-node ONTAP 9.8 cluster.

In this scenario, which tool would the administrator use to validate the configuration?

- A. Active IQ Upgrade Advisor
- B. Interoperability Matrix Tool
- C. NetAppDocs
- D. Active IQ Config Advisor

**Answer:** C

#### NEW QUESTION 15

Click the Exhibit button.

```
cluster1::> network interface show
```

Vserver	Logical Interface	Status Admin/Oper	Network Address/Mask	Current Node	Current Port	Is Home
Cluster	cluster1-01_clus1	up/up	169.254.145.151/16	cluster1-01	e0a	true
	cluster1-01_clus2	up/up	169.254.58.159/16	cluster1-01	e0b	true
	cluster1-02_clus1	up/up	169.254.110.0/16	cluster1-02	e0a	true
	cluster1-02_clus2	up/up	169.254.212.198/16	cluster1-02	e0b	true
cluster1	cluster1-01_mgmt1	up/up	192.168.0.111/24	cluster1-01	e0c	true
	cluster1-02_mgmt1	up/up	192.168.0.112/24	cluster1-02	e0c	true
	cluster_mgmt	up/up	192.168.0.101/24	cluster1-01	e0c	true

You are installing a new AFF All SAN Array A700 HA pair.

Referring to the exhibit, which IP address would have been used to join node 02 to the cluster during setup?


- A. 192.168.0.112
- B. 169.254.212.198
- C. 169.254.145.151
- D. 192.168.0.101

**Answer:** A

#### NEW QUESTION 16

Click the Exhibit button.



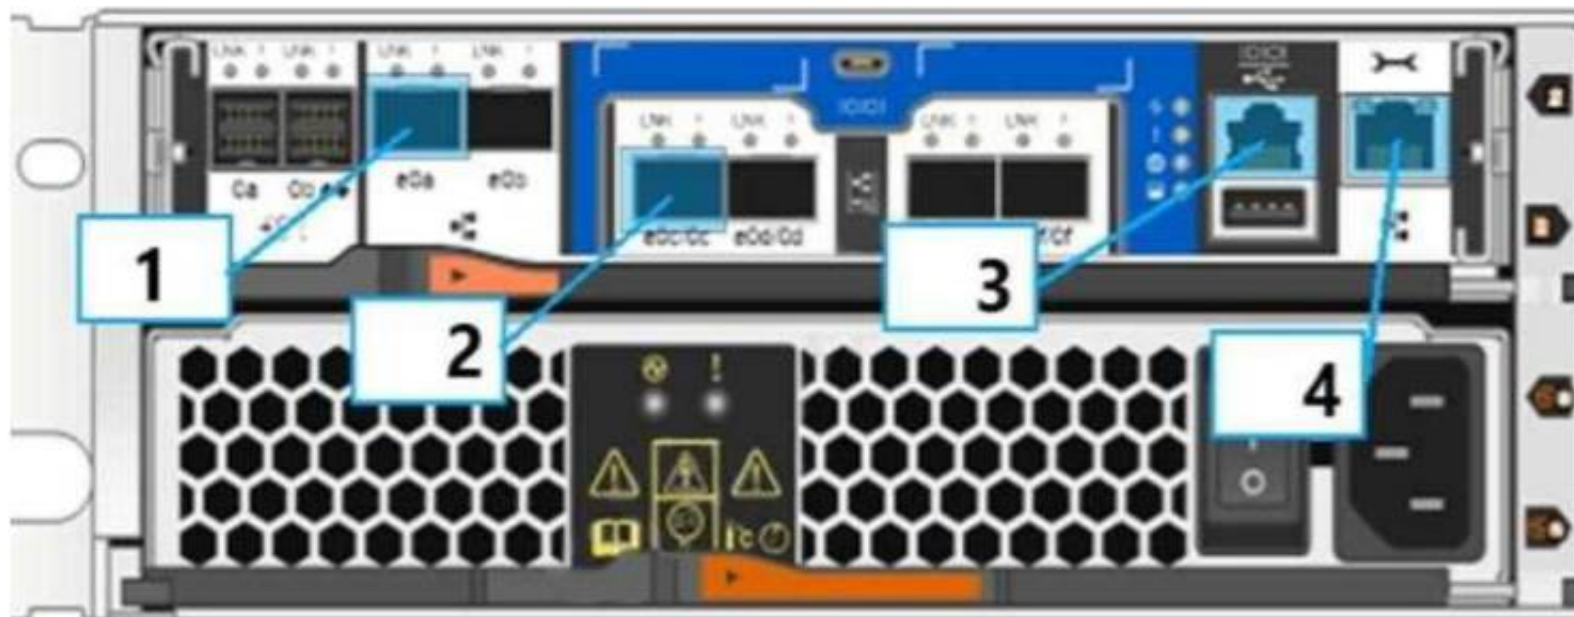

Referring to the numbers shown in the exhibit, which port on an AFF A220 controller is used as port e0M in ONTAP?

- A. 4
- B. 3
- C. 2
- D. 1

**Answer:** A

#### NEW QUESTION 20

A customer is creating a new SVM to host iSCSI LUNs for a Hyper-V cluster. You need to successfully map the new LUNs and make them visible to the Hyper-V cluster.

In this scenario, which host information is required to accomplish this task?

- A. IQNs
- B. WWNNs
- C. WWPNS
- D. host names

**Answer:** D

#### NEW QUESTION 24

After moving a new AFF A400 cluster into production, the administrator notices error events in ONTAP System Manager regarding SAS HA issues.

In this scenario, which NetApp tool would have identified these errors after the installation process?

- A. Cloud Manager
- B. ONTAP System Manager
- C. Active IQ Config Advisor
- D. Active IQ Unified Manager

**Answer:** B

#### NEW QUESTION 27

Your customer is migrating data from a legacy FAS8020 system that runs ONTAP9.5 software to a new AFFA250 MetroCluster over IP configuration.

In this scenario, which two methods would be supported to migrate the data? (Choose two.)

- A. Perform a controller swap from the FAS8020 to the AFFA250s.
- B. Create a 4-node cluster on one side and use the volmove command to migrate the data.
- C. Use a host-based copy migration method.
- D. Configure a SnapMirror copy between the FAS8020 and the AFFA250 systems.

**Answer:** AD

#### NEW QUESTION 29

You want to disconnect a DS224C shelf with 3.8 TB NetApp Storage Encryption (NSE) SSDs to an AFF A300 HA pair with two DS224C shelves with 3.8 TB SSDs without NSE in one stack.

In this scenario, how would you add the shelf?

- A. Add the shelf to the existing stack.
- B. Create a new stack on the HA pair to add the shelf.
- C. Connect the shelf to an HA pair with NSE drives.
- D. License NSE and add the shelf to this HA pair as a new stack.

**Answer:** A

#### NEW QUESTION 31

Click the Exhibit button.

My cases

## My Cases

Create a Case

Cases for My Company

▼

DATE OPENED

12-May-2018

11-Jun-2020

New Search

i

> Email CSV

Case #	Symptom	Date Last Updated	Status	Serial #	Cluster SN	Case Owner Company	+
Case#	Symptom		Status	Serial #	Cluster S	Case Owner Compa	X
41747189	PRODUCT REGISTRATION FROM SUPPORT	06/10/2020 10:07:00 PST	Active				

After installation of a new ONTAP cluster, you experience a problem. You successfully create a support case on the NetApp Support site. The customer asks you how to view the status of the case.

Referring to the exhibit, which two steps would allow the customer to accomplish this task? (Choose two.)

- A. Open <https://support.netapp.com>, using the partner credentials.
- B. Open <https://support.netapp.com>, using the customer credentials.
- C. Open My Cases, and select the 41747189 case number.
- D. Open My Cases, and select Create a Case.

**Answer:** BC

**Explanation:**

Reference: <https://mysupport.netapp.com/site/info/find-support>

**NEW QUESTION 33**

Your customer wants to know more about the network configuration within the cluster.

In this scenario, which statement is correct about a LIF?

- A. A LIF is a port that provides physical connections.
- B. A LIF is created within a broadcast domain and contains a pool of IP address.
- C. A LIF is an IP address or a WWPN that is associated with a port.
- D. A LIF separates network domains to access cluster data.

**Answer:** C

**NEW QUESTION 35**

Your customer currently has a 4-node AFF A400 cluster that runs ONTAP 9.8, with two NS224 shelves that are connected to each HA pair. The customer needs to add additional capacity to the cluster.

Which two actions would enable the customer to accomplish this task? (Choose two.)

- A. Connect the new NS224 shelves to the existing NS224 shelves and adjust the shelf IDs.
- B. Connect the new NS224 shelves to the existing Cisco Nexus 3232C switches
- C. Deploy a new AFF A400 to the cluster.
- D. Deploy new, dedicated, storage switches for the new NS224 shelves.

**Answer:** AC

**Explanation:**

Reference: <https://docs.netapp.com/us-en/ontap-systems/ns224/hot-add-shelf.html#prepare-an-ffa700-aff-a800-or-aff-a400-ha-pair-to-hot-add-a-second-shelf>

**NEW QUESTION 36**

You are preparing to physically install a new AFF A400 cluster into a customer's racks. All equipment has been delivered to the customer's site.

Which three tools do you need to complete this installation? (Choose three.)

- A. additional network cables
- B. Phillips #2 screwdriver
- C. laptop computer
- D. slide rail kit
- E. cable management tray

**Answer:** ABC

**Explanation:**

Reference: <https://docs.netapp.com/us-en/ontap-systems/a400/install-detailed-guide.html#step-1-prepare-for-installation>

**NEW QUESTION 37**

You installed a new 2-node FAS500f ONTAP 9.8 switchless cluster that serves NAS volumes to both NFSv4.1 and SMB clients. The host operating systems have full flow control enabled on their data ports.

In this scenario, which two flow control settings would you verify? (Choose two.)

- A. Verify that the data network ports have full flow control disabled.
- B. Verify that the cluster network ports have full flow control enabled.
- C. Verify that the data network ports have full flow control enabled.
- D. Verify that the cluster network ports have full flow control disabled.

**Answer:** AB

**Explanation:**

Reference: [https://docs.netapp.com/us-en/ontap/pdfs/sidebar/Network\\_management.pdf](https://docs.netapp.com/us-en/ontap/pdfs/sidebar/Network_management.pdf)

**NEW QUESTION 41**

.....

## Thank You for Trying Our Product

\* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

\* One year free update

You can enjoy free update one year. 24x7 online support.

\* Trusted by Millions

We currently serve more than 30,000,000 customers.

\* Shop Securely

All transactions are protected by VeriSign!

**100% Pass Your NS0-184 Exam with Our Prep Materials Via below:**

<https://www.certleader.com/NS0-184-dumps.html>