

Associate-Cloud-Engineer Dumps

Google Cloud Certified - Associate Cloud Engineer

<https://www.certleader.com/Associate-Cloud-Engineer-dumps.html>



NEW QUESTION 1

Your company runs one batch process in an on-premises server that takes around 30 hours to complete. The task runs monthly, can be performed offline, and must be restarted if interrupted. You want to migrate this workload to the cloud while minimizing cost. What should you do?

- A. Migrate the workload to a Compute Engine Preemptible VM.
- B. Migrate the workload to a Google Kubernetes Engine cluster with Preemptible nodes.
- C. Migrate the workload to a Compute Engine V
- D. Start and stop the instance as needed.
- E. Create an Instance Template with Preemptible VMs O
- F. Create a Managed Instance Group from the template and adjust Target CPU Utilizatio
- G. Migrate the workload.

Answer: B

NEW QUESTION 2

You want to configure a solution for archiving data in a Cloud Storage bucket. The solution must be cost-effective. Data with multiple versions should be archived after 30 days. Previous versions are accessed once a month for reporting. This archive data is also occasionally updated at month-end. What should you do?

- A. Add a bucket lifecycle rule that archives data with newer versions after 30 days to Coldline Storage.
- B. Add a bucket lifecycle rule that archives data with newer versions after 30 days to Nearline Storage.
- C. Add a bucket lifecycle rule that archives data from regional storage after 30 days to Coldline Storage.
- D. Add a bucket lifecycle rule that archives data from regional storage after 30 days to Nearline Storage.

Answer: B

NEW QUESTION 3

Your managed instance group raised an alert stating that new instance creation has failed to create new instances. You need to maintain the number of running instances specified by the template to be able to process expected application traffic. What should you do?

- A. Create an instance template that contains valid syntax which will be used by the instance grou
- B. Delete any persistent disks with the same name as instance names.
- C. Create an instance template that contains valid syntax that will be used by the instance grou
- D. Verify that the instance name and persistent disk name values are not the same in the template.
- E. Verify that the instance template being used by the instance group contains valid synta
- F. Delete any persistent disks with the same name as instance name
- G. Set the disks.autoDelete property to true in the instance template.
- H. Delete the current instance template and replace it with a new instance templat
- I. Verify that the instance name and persistent disk name values are not the same in the templat
- J. Set the disks.autoDelete property to true in the instance template.

Answer: C

NEW QUESTION 4

Your customer has implemented a solution that uses Cloud Spanner and notices some read latency-related performance issues on one table. This table is accessed only by their users using a primary key. The table schema is shown below.

```
CREATE TABLE Persons (  
    person_id INT64 NOT NULL,    // sequential number based on number of registration  
    account_creation_date DATE, // system date  
    birthdate DATE,            // customer birthdate  
    firstname STRING (255),    // first name  
    lastname STRING (255),     // last name  
    profile_picture BYTES (255) // profile picture  
    ) PRIMARY KEY (person_id)
```

You want to resolve the issue. What should you do?

- A. Remove the `profile_picture` field from the table.
- B. Add a secondary index on the `person_id` column.
- C. Change the primary key to not have monotonically increasing values.
- D. Create a secondary index using the following Data Definition Language (DDL):

```
CREATE INDEX person_id_ix
ON Persons (
    person_id,
    firstname,
    lastname
) STORING (
    profile_picture
)
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 5

You manage an App Engine Service that aggregates and visualizes data from BigQuery. The application is deployed with the default App Engine Service account. The data that needs to be visualized resides in a different project managed by another team. You do not have access to this project, but you want your application to be able to read data from the BigQuery dataset. What should you do?

- A. Ask the other team to grant your default App Engine Service account the role of BigQuery Job User.
- B. Ask the other team to grant your default App Engine Service account the role of BigQuery Data Viewer.
- C. In Cloud IAM of your project, ensure that the default App Engine service account has the role of BigQuery Data Viewer.
- D. In Cloud IAM of your project, grant a newly created service account from the other team the role of BigQuery Job User in your project.

Answer: C

Explanation:

The Owner, Editor, and Viewer primitive roles include the BigQuery Admin (roles/bigquery.dataOwner), BigQuery Data Editor (roles/bigquery.dataEditor), and BigQuery Data Viewer (roles/bigquery.dataViewer) roles, respectively. This means the Owner, Editor, and Viewer primitive roles have BigQuery access as defined for the respective BigQuery roles.

NEW QUESTION 6

You are the organization and billing administrator for your company. The engineering team has the Project Creator role on the organization. You do not want the engineering team to be able to link projects to the billing account. Only the finance team should be able to link a project to a billing account, but they should not be able to make any other changes to projects. What should you do?

- A. Assign the finance team only the Billing Account User role on the billing account.
- B. Assign the engineering team only the Billing Account User role on the billing account.
- C. Assign the finance team the Billing Account User role on the billing account and the Project Billing Manager role on the organization.
- D. Assign the engineering team the Billing Account User role on the billing account and the Project Billing Manager role on the organization.

Answer: D

NEW QUESTION 7

You have a development project with appropriate IAM roles defined. You are creating a production project and want to have the same IAM roles on the new project, using the fewest possible steps. What should you do?

- A. Use `gcloud iam roles copy` and specify the production project as the destination project.
- B. Use `gcloud iam roles copy` and specify your organization as the destination organization.
- C. In the Google Cloud Platform Console, use the 'create role from role' functionality.
- D. In the Google Cloud Platform Console, use the 'create role' functionality and select all applicable permissions.

Answer: B

NEW QUESTION 8

You need to manage a third-party application that will run on a Compute Engine instance. Other Compute Engine instances are already running with default configuration. Application installation files are hosted on Cloud Storage. You need to access these files from the new instance without allowing other virtual machines (VMs) to access these files. What should you do?

- A. Create the instance with the default Compute Engine service account Grant the service account permissions on Cloud Storage.
- B. Create the instance with the default Compute Engine service account Add metadata to the objects on Cloud Storage that matches the metadata on the new instance.
- C. Create a new service account and assign this service account to the new instance Grant the service account permissions on Cloud Storage.
- D. Create a new service account and assign this service account to the new instance Add metadata to the objects on Cloud Storage that matches the metadata on the new instance.

Answer: C

NEW QUESTION 9

You have an application that uses Cloud Spanner as a backend database. The application has a very predictable traffic pattern. You want to automatically scale up or down the number of Spanner nodes depending on traffic. What should you do?

- A. Create a cron job that runs on a scheduled basis to review stackdriver monitoring metrics, and then resize the Spanner instance accordingly.
- B. Create a Stackdriver alerting policy to send an alert to oncall SRE emails when Cloud Spanner CPU exceeds the threshold
- C. SREs would scale resources up or down accordingly.
- D. Create a Stackdriver alerting policy to send an alert to Google Cloud Support email when Cloud Spanner CPU exceeds your threshold
- E. Google support would scale resources up or down accordingly.
- F. Create a Stackdriver alerting policy to send an alert to webhook when Cloud Spanner CPU is over or under your threshold
- G. Create a Cloud Function that listens to HTTP and resizes Spanner resources accordingly.

Answer: D

NEW QUESTION 10

You are asked to set up application performance monitoring on Google Cloud projects A, B, and C as a single pane of glass. You want to monitor CPU, memory, and disk. What should you do?

- A. Enable API and then share charts from project A, B, and C.
- B. Enable API and then give the metrics.reader role to projects A, B, and C.
- C. Enable API and then use default dashboards to view all projects in sequence.
- D. Enable API, create a workspace under project A, and then add project B and C.

Answer: D

NEW QUESTION 10

You are using Data Studio to visualize a table from your data warehouse that is built on top of BigQuery. Data is appended to the data warehouse during the day. At night, the daily summary is recalculated by overwriting the table. You just noticed that the charts in Data Studio are broken, and you want to analyze the problem. What should you do?

- A. Use the BigQuery interface to review the nightly Job and look for any errors
- B. Review the Error Reporting page in the Cloud Console to find any errors.
- C. In Cloud Logging create a filter for your Data Studio report
- D. Use Cloud Debugger to find out why the data was not refreshed correctly

Answer: D

NEW QUESTION 11

You will have several applications running on different Compute Engine instances in the same project. You want to specify at a more granular level the service account each instance uses when calling Google Cloud APIs. What should you do?

- A. When creating the instances, specify a Service Account for each instance
- B. When creating the instances, assign the name of each Service Account as instance metadata
- C. After starting the instances, use `gcloud compute instances update` to specify a Service Account for each instance
- D. After starting the instances, use `gcloud compute instances update` to assign the name of the relevant Service Account as instance metadata

Answer: C

NEW QUESTION 12

You have a batch workload that runs every night and uses a large number of virtual machines (VMs). It is fault-tolerant and can tolerate some of the VMs being terminated. The current cost of VMs is too high. What should you do?

- A. Run a test using simulated maintenance event
- B. If the test is successful, use preemptible N1 Standard VMs when running future jobs.
- C. Run a test using simulated maintenance event
- D. If the test is successful, use N1 Standard VMs when running future jobs.
- E. Run a test using a managed instance group
- F. If the test is successful, use N1 Standard VMs in the managed instance group when running future jobs.
- G. Run a test using N1 standard VMs instead of N2. If the test is successful, use N1 Standard VMs when running future jobs.

Answer: B

NEW QUESTION 14

You have deployed multiple Linux instances on Compute Engine. You plan on adding more instances in the coming weeks. You want to be able to access all of these instances through your SSH client over the Internet without having to configure specific access on the existing and new instances. You do not want the Compute Engine instances to have a public IP. What should you do?

- A. Configure Cloud Identity-Aware Proxy (or HTTPS resources)
- B. Configure Cloud Identity-Aware Proxy for SSH and TCP resources.
- C. Create an SSH keypair and store the public key as a project-wide SSH Key
- D. Create an SSH keypair and store the private key as a project-wide SSH Key

Answer: C

NEW QUESTION 19

You are using Container Registry to centrally store your company's container images in a separate project. In another project, you want to create a Google Kubernetes Engine (GKE) cluster. You want to ensure that Kubernetes can download images from Container Registry. What should you do?

- A. In the project where the images are stored, grant the Storage Object Viewer IAM role to the service account used by the Kubernetes nodes.
- B. When you create the GKE cluster, choose the Allow full access to all Cloud APIs option under 'Access scopes'.
- C. Create a service account, and give it access to Cloud Storage
- D. Create a P12 key for this service account and use it as an imagePullSecrets in Kubernetes.
- E. Configure the ACLs on each image in Cloud Storage to give read-only access to the default Compute Engine service account.

Answer: B

NEW QUESTION 23

You have one GCP account running in your default region and zone and another account running in a non-default region and zone. You want to start a new Compute Engine instance in these two Google Cloud Platform accounts using the command line interface. What should you do?

- A. Create two configurations using `gcloud config configurations create [NAME]`. Run `gcloud config configurations activate [NAME]` to switch between accounts when running the commands to start the Compute Engine instances.
- B. Create two configurations using `gcloud config configurations create [NAME]`. Run `gcloud configurations list` to start the Compute Engine instances.
- C. Activate two configurations using `gcloud configurations activate [NAME]`. Run `gcloud config list` to start the Compute Engine instances.
- D. Activate two configurations using `gcloud configurations activate [NAME]`. Run `gcloud configurations list` to start the Compute Engine instances.

Answer: C

NEW QUESTION 27

You recently deployed a new version of an application to App Engine and then discovered a bug in the release. You need to immediately revert to the prior version of the application. What should you do?

- A. Run `gcloud app restore`.
- B. On the App Engine page of the GCP Console, select the application that needs to be reverted and click Revert.
- C. On the App Engine Versions page of the GCP Console, route 100% of the traffic to the previous version.
- D. Deploy the original version as a separate applicatio
- E. Then go to App Engine settings and split traffic between applications so that the original version serves 100% of the requests.

Answer: D

NEW QUESTION 28

Your development team needs a new Jenkins server for their project. You need to deploy the server using the fewest steps possible. What should you do?

- A. Download and deploy the Jenkins Java WAR to App Engine Standard.
- B. Create a new Compute Engine instance and install Jenkins through the command line interface.
- C. Create a Kubernetes cluster on Compute Engine and create a deployment with the Jenkins Docker image.
- D. Use GCP Marketplace to launch the Jenkins solution.

Answer: D

NEW QUESTION 31

You built an application on Google Cloud Platform that uses Cloud Spanner. Your support team needs to monitor the environment but should not have access to table data. You need a streamlined solution to grant the correct permissions to your support team, and you want to follow Google-recommended practices. What should you do?

- A. Add the support team group to the roles/monitoring.viewer role
- B. Add the support team group to the roles/spanner.databaseUser role.
- C. Add the support team group to the roles/spanner.databaseReader role.
- D. Add the support team group to the roles/stackdriver.accounts.viewer role.

Answer: B

NEW QUESTION 34

You have an object in a Cloud Storage bucket that you want to share with an external company. The object contains sensitive data. You want access to the content to be removed after four hours. The external company does not have a Google account to which you can grant specific user-based access privileges. You want to use the most secure method that requires the fewest steps. What should you do?

- A. Create a signed URL with a four-hour expiration and share the URL with the company.
- B. Set object access to 'public' and use object lifecycle management to remove the object after four hours.
- C. Configure the storage bucket as a static website and furnish the object's URL to the compan
- D. Delete the object from the storage bucket after four hours.
- E. Create a new Cloud Storage bucket specifically for the external company to acces
- F. Copy the object to that bucke
- G. Delete the bucket after four hours have passed.

Answer: A

NEW QUESTION 38

You deployed an LDAP server on Compute Engine that is reachable via TLS through port 636 using UDP. You want to make sure it is reachable by clients over that port. What should you do?

- A. Add the network tag allow-udp-636 to the VM instance running the LDAP server.
- B. Create a route called allow-udp-636 and set the next hop to be the VM instance running the LDAP server.
- C. Add a network tag of your choice to the instance
- D. Create a firewall rule to allow ingress on UDP port 636 for that network tag.
- E. Add a network tag of your choice to the instance running the LDAP server.
- F. Create a firewall rule to allow egress on UDP port 636 for that network tag.

Answer: C

NEW QUESTION 42

Your company runs its Linux workloads on Compute Engine instances. Your company will be working with a new operations partner that does not use Google Accounts. You need to grant access to the instances to your operations partner so they can maintain the installed tooling. What should you do?

- A. Enable Cloud IAP for the Compute Engine instances, and add the operations partner as a Cloud IAP Tunnel User.
- B. Tag all the instances with the same network tag
- C. Create a firewall rule in the VPC to grant TCP access on port 22 for traffic from the operations partner to instances with the network tag.
- D. Set up Cloud VPN between your Google Cloud VPC and the internal network of the operations partner.
- E. Ask the operations partner to generate SSH key pairs, and add the public keys to the VM instances.

Answer: B

NEW QUESTION 45

You need to assign a Cloud Identity and Access Management (Cloud IAM) role to an external auditor. The auditor needs to have permissions to review your Google Cloud Platform (GCP) Audit Logs and also to review your Data Access logs. What should you do?

- A. Assign the auditor the IAM role roles/logging.privateLogView
- B. Perform the export of logs to Cloud Storage.
- C. Assign the auditor the IAM role roles/logging.privateLogView
- D. Direct the auditor to also review the logs for changes to Cloud IAM policy.
- E. Assign the auditor's IAM user to a custom role that has logging.privateLogEntries.list permission
- F. Perform the export of logs to Cloud Storage.
- G. Assign the auditor's IAM user to a custom role that has logging.privateLogEntries.list permission
- H. Direct the auditor to also review the logs for changes to Cloud IAM policy.

Answer: C

NEW QUESTION 48

You are migrating a production-critical on-premises application that requires 96 vCPUs to perform its task. You want to make sure the application runs in a similar environment on GCP. What should you do?

- A. When creating the VM, use machine type n1-standard-96.
- B. When creating the VM, use Intel Skylake as the CPU platform.
- C. Create the VM using Compute Engine default settings
- D. Use gcloud to modify the running instance to have 96 vCPUs.
- E. Start the VM using Compute Engine default settings, and adjust as you go based on Rightsizing Recommendations.

Answer: C

NEW QUESTION 49

You create a Deployment with 2 replicas in a Google Kubernetes Engine cluster that has a single preemptible node pool. After a few minutes, you use kubectl to examine the status of your Pod and observe that one of them is still in Pending status:

```
$ kubectl get pods -l app=myapp
NAME                                READY   STATUS    RESTART   AGE
myapp-deployment-58ddb995-lp86m    0/1     Pending   0         9m
myapp-deployment-58ddb995-qjpkg    1/1     Running   0         9m
```

What is the most likely cause?

- A. The pending Pod's resource requests are too large to fit on a single node of the cluster.
- B. Too many Pods are already running in the cluster, and there are not enough resources left to schedule the pending Pod.
- C. The node pool is configured with a service account that does not have permission to pull the container image used by the pending Pod.
- D. The pending Pod was originally scheduled on a node that has been preempted between the creation of the Deployment and your verification of the Pods' status.
- E. It is currently being rescheduled on a new node.

Answer: B

NEW QUESTION 53

You are using Deployment Manager to create a Google Kubernetes Engine cluster. Using the same Deployment Manager deployment, you also want to create a DaemonSet in the kube-system namespace of the cluster. You want a solution that uses the fewest possible services. What should you do?

- A. Add the cluster's API as a new Type Provider in Deployment Manager, and use the new type to create the DaemonSet.
- B. Use the Deployment Manager Runtime Configurator to create a new Config resource that contains the DaemonSet definition.
- C. With Deployment Manager, create a Compute Engine instance with a startup script that uses kubectl to create the DaemonSet.
- D. In the cluster's definition in Deployment Manager, add a metadata that has kube-system as key and the DaemonSet manifest as value.

Answer: C

NEW QUESTION 54

Your company's infrastructure is on-premises, but all machines are running at maximum capacity. You want to burst to Google Cloud. The workloads on Google Cloud must be able to directly communicate to the workloads on-premises using a private IP range. What should you do?

- A. In Google Cloud, configure the VPC as a host for Shared VPC.
- B. In Google Cloud, configure the VPC for VPC Network Peering.
- C. Create bastion hosts both in your on-premises environment and on Google Cloud.
- D. Configure both as proxy servers using their public IP addresses.
- E. Set up Cloud VPN between the infrastructure on-premises and Google Cloud.

Answer: B

NEW QUESTION 56

An application generates daily reports in a Compute Engine virtual machine (VM). The VM is in the project corp-iot-insights. Your team operates only in the project corp-aggregate-reports and needs a copy of the daily exports in the bucket corp-aggregate-reports-storage. You want to configure access so that the daily reports from the VM are available in the bucket corp-aggregate-reports-storage and use as few steps as possible while following Google-recommended practices. What should you do?

- A. Move both projects under the same folder.
- B. Grant the VM Service Account the role Storage Object Creator on corp-aggregate-reports-storage.
- C. Create a Shared VPC network between both project
- D. Grant the VM Service Account the role Storage Object Creator on corp-iot-insights.
- E. Make corp-aggregate-reports-storage public and create a folder with a pseudo-randomized suffix name. Share the folder with the IoT team.

Answer: D

NEW QUESTION 61


You received a JSON file that contained a private key of a Service Account in order to get access to several resources in a Google Cloud project. You downloaded and installed the Cloud SDK and want to use this private key for authentication and authorization when performing gcloud commands. What should you do?

- A. Use the command `gcloud auth login` and point it to the private key
- B. Use the command `gcloud auth activate-service-account` and point it to the private key
- C. Place the private key file in the installation directory of the Cloud SDK and rename it to "credentials.json"
- D. Place the private key file in your home directory and rename it to "GOOGLE_APPLICATION_CREDENTIALS".

Answer: A

NEW QUESTION 62

Your company has a 3-tier solution running on Compute Engine. The configuration of the current infrastructure is shown below.

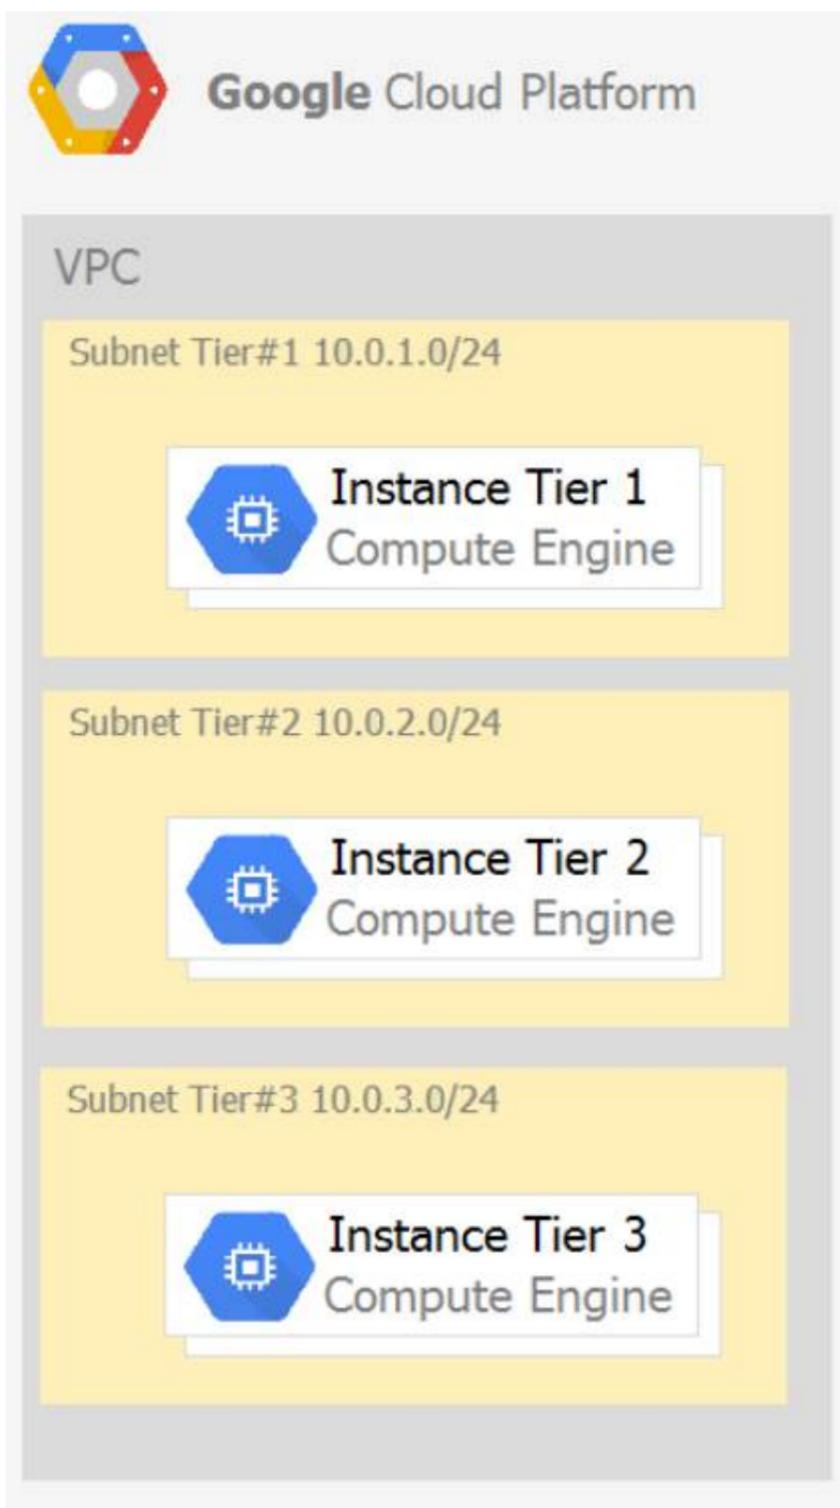

Each tier has a service account that is associated with all instances within it. You need to enable communication on TCP port 8080 between tiers as follows:

- Instances in tier #1 must communicate with tier #2.
- Instances in tier #2 must communicate with tier #3. What should you do?

1. Create an ingress firewall rule with the following settings:
 - Targets: all instances
 - Source filter: IP ranges (with the range set to 10.0.2.0/24)
 - Protocols: allow all
1. Create an ingress firewall rule with the following settings:
 - Targets: all instances
 - Source filter: IP ranges (with the range set to 10.0.1.0/24)
 - Protocols: allow all
1. Create an ingress firewall rule with the following settings:
 - Targets: all instances with tier #2 service account
 - Source filter: all instances with tier #1 service account
 - Protocols: allow TCP:8080
1. Create an ingress firewall rule with the following settings:
 - Targets: all instances with tier #3 service account
 - Source filter: all instances with tier #2 service account
 - Protocols: allow TCP: 8080
1. Create an ingress firewall rule with the following settings:
 - Targets: all instances with tier #2 service account
 - Source filter: all instances with tier #1 service account
 - Protocols: allow all
1. Create an ingress firewall rule with the following settings:
 - Targets: all instances with tier #3 service account
 - Source filter: all instances with tier #2 service account
 - Protocols: allow all
1. Create an egress firewall rule with the following settings:
 - Targets: all instances
 - Source filter: IP ranges (with the range set to 10.0.2.0/24)
 - Protocols: allow TCP: 8080
1. Create an egress firewall rule with the following settings:
 - Targets: all instances
 - Source filter: IP ranges (with the range set to 10.0.1.0/24)
 - Protocols: allow TCP: 8080

Answer: B

NEW QUESTION 64

You want to deploy an application on Cloud Run that processes messages from a Cloud Pub/Sub topic. You want to follow Google-recommended practices. What should you do?

1. Create a Cloud Function that uses a Cloud Pub/Sub trigger on that topic.
2. Call your application on Cloud Run from the Cloud Function for every message.
1. Grant the Pub/Sub Subscriber role to the service account used by Cloud Run.
2. Create a Cloud Pub/Sub subscription for that topic.
3. Make your application pull messages from that subscription.
1. Create a service account.
2. Give the Cloud Run Invoker role to that service account for your Cloud Run application.
3. Create a Cloud Pub/Sub subscription that uses that service account and uses your Cloud Run application as the push endpoint.
1. Deploy your application on Cloud Run on GKE with the connectivity set to Internal.
2. Create a Cloud Pub/Sub subscription for that topic.
3. In the same Google Kubernetes Engine cluster as your application, deploy a container that takes the messages and sends them to your application.

Answer: D

NEW QUESTION 69

You need to select and configure compute resources for a set of batch processing jobs. These jobs take around 2 hours to complete and are run nightly. You want to minimize service costs. What should you do?

- A. Select Google Kubernetes Engine
- B. Use a single-node cluster with a small instance type.
- C. Select Google Kubernetes Engine
- D. Use a three-node cluster with micro instance types.
- E. Select Compute Engine
- F. Use preemptible VM instances of the appropriate standard machine type.
- G. Select Compute Engine
- H. Use VM instance types that support micro bursting.

Answer: C

NEW QUESTION 73

The core business of your company is to rent out construction equipment at a large scale. All the equipment that is being rented out has been equipped with multiple sensors that send event information every few seconds. These signals can vary from engine status, distance traveled, fuel level, and more. Customers are billed based on the consumption monitored by these sensors. You expect high throughput – up to thousands of events per hour per device – and need to retrieve consistent data based on the time of the event. Storing and retrieving individual signals should be atomic. What should you do?

- A. Create a file in Cloud Storage per device and append new data to that file.
- B. Create a file in Cloud Filestore per device and append new data to that file.
- C. Ingest the data into Datastore
- D. Store data in an entity group based on the device.
- E. Ingest the data into Cloud Bigtable
- F. Create a row key based on the event timestamp.

Answer: D

NEW QUESTION 77

You are using Google Kubernetes Engine with autoscaling enabled to host a new application. You want to expose this new application to the public, using HTTPS on a public IP address. What should you do?

- A. Create a Kubernetes Service of type NodePort for your application, and a Kubernetes Ingress to expose this Service via a Cloud Load Balancer.
- B. Create a Kubernetes Service of type ClusterIP for your application
- C. Configure the public DNS name of your application using the IP of this Service.
- D. Create a Kubernetes Service of type NodePort to expose the application on port 443 of each node of the Kubernetes cluster
- E. Configure the public DNS name of your application with the IP of every node of the cluster to achieve load-balancing.
- F. Create a HAProxy pod in the cluster to load-balance the traffic to all the pods of the application. Forward the public traffic to HAProxy with an iptables rule
- G. Configure the DNS name of your application using the public IP of the node HAProxy is running on.

Answer: A

NEW QUESTION 82

You are using multiple configurations for gcloud. You want to review the configured Kubernetes Engine cluster of an inactive configuration using the fewest possible steps. What should you do?

- A. Use gcloud config configurations describe to review the output.
- B. Use gcloud config configurations activate and gcloud config list to review the output.
- C. Use kubectl config get-contexts to review the output.
- D. Use kubectl config use-context and kubectl config view to review the output.

Answer: D

NEW QUESTION 87

You want to configure 10 Compute Engine instances for availability when maintenance occurs. Your requirements state that these instances should attempt to automatically restart if they crash. Also, the instances should be highly available including during system maintenance. What should you do?

- A. Create an instance template for the instance
- B. Set the 'Automatic Restart' to on
- C. Set the 'On-host maintenance' to Migrate VM instance
- D. Add the instance template to an instance group.
- E. Create an instance template for the instance
- F. Set 'Automatic Restart' to off
- G. Set 'On-host maintenance' to Terminate VM instance
- H. Add the instance template to an instance group.
- I. Create an instance group for the instance
- J. Set the 'Autohealing' health check to healthy (HTTP).
- K. Create an instance group for the instance
- L. Verify that the 'Advanced creation options' setting for 'do not retry machine creation' is set to off.

Answer: B

NEW QUESTION 91

You need to create a new billing account and then link it with an existing Google Cloud Platform project. What should you do?

- A. Verify that you are Project Billing Manager for the GCP project
- B. Update the existing project to link it to the existing billing account.

- C. Verify that you are Project Billing Manager for the GCP projec
- D. Create a new billing account and link the new billing account to the existing project.
- E. Verify that you are Billing Administrator for the billing accoun
- F. Create a new project and link the new project to the existing billing account.
- G. Verify that you are Billing Administrator for the billing accoun
- H. Update the existing project to link it to the existing billing account.

Answer: C

NEW QUESTION 92

Your organization needs to grant users access to query datasets in BigQuery but prevent them from accidentally deleting the datasets. You want a solution that follows Google-recommended practices. What should you do?

- A. Add users to roles/bigquery user role only, instead of roles/bigquery dataOwner.
- B. Add users to roles/bigquery dataEditor role only, instead of roles/bigquery dataOwner.
- C. Create a custom role by removing delete permissions, and add users to that role only.
- D. Create a custom role by removing delete permission
- E. Add users to the group, and then add the group to the custom role.

Answer: B

NEW QUESTION 95

You need to update a deployment in Deployment Manager without any resource downtime in the deployment. Which command should you use?

- A. `gcloud deployment-manager deployments create --config <deployment-config-path>`
- B. `gcloud deployment-manager deployments update --config <deployment-config-path>`
- C. `gcloud deployment-manager resources create --config <deployment-config-path>`
- D. `gcloud deployment-manager resources update --config <deployment-config-path>`

Answer: B

NEW QUESTION 99

Your existing application running in Google Kubernetes Engine (GKE) consists of multiple pods running on four GKE n1-standard-2 nodes. You need to deploy additional pods requiring n2-highmem-16 nodes without any downtime. What should you do?

- A. Use `gcloud container clusters upgrad`
- B. Deploy the new services.
- C. Create a new Node Pool and specify machine type n2-highmem-16. Deploy the new pods.
- D. Create a new cluster with n2-highmem-16 node
- E. Redeploy the pods and delete the old cluster.
- F. Create a new cluster with both n1-standard-2 and n2-highmem-16 node
- G. Redeploy the pods and delete the old cluster.

Answer: B

NEW QUESTION 102

You are running multiple microservices in a Kubernetes Engine cluster. One microservice is rendering images. The microservice responsible for the image rendering requires a large amount of CPU time compared to the memory it requires. The other microservices are workloads that are optimized for n1-standard machine types. You need to optimize your cluster so that all workloads are using resources as efficiently as possible. What should you do?

- A. Assign the pods of the image rendering microservice a higher pod priority than the older microservices
- B. Create a node pool with compute-optimized machine type nodes for the image rendering microservice Use the node pool with general-purpose machine type nodes for the other microservices
- C. Use the node pool with general-purpose machine type nodes for lite mage rendering microservice Create a nodepool with compute-optimized machine type nodes for the other microservices
- D. Configure the required amount of CPU and memory in the resource requests specification of the image rendering microservice deployment Keep the resource requests for the other microservices at the default

Answer: B

NEW QUESTION 105

You need to manage multiple Google Cloud Platform (GCP) projects in the fewest steps possible. You want to configure the Google Cloud SDK command line interface (CLI) so that you can easily manage multiple GCP projects. What should you do?

- A. * 1. Create a configuration for each project you need to manage.* 2. Activate the appropriate configuration when you work with each of your assigned GCP projects.
- B. * 1. Create a configuration for each project you need to manage.* 2. Use `gcloud init` to update the configuration values when you need to work with a non-default project
- C. * 1. Use the default configuration for one project you need to manage.* 2. Activate the appropriate configuration when you work with each of your assigned GCP projects.
- D. * 1. Use the default configuration for one project you need to manage.* 2. Use `gcloud init` to update the configuration values when you need to work with a non-default project.

Answer: D

NEW QUESTION 110

You have one project called proj-sa where you manage all your service accounts. You want to be able to use a service account from this project to take snapshots

of VMs running in another project called proj-vm. What should you do?

- A. Download the private key from the service account, and add it to each VMs custom metadata.
- B. Download the private key from the service account, and add the private key to each VM's SSH keys.
- C. Grant the service account the IAM Role of Compute Storage Admin in the project called proj-vm.
- D. When creating the VMs, set the service account's API scope for Compute Engine to read/write.

Answer: C

NEW QUESTION 112

Your finance team wants to view the billing report for your projects. You want to make sure that the finance team does not get additional permissions to the project. What should you do?

- A. Add the group for the finance team to roles/billing user role.
- B. Add the group for the finance team to roles/billing admin role.
- C. Add the group for the finance team to roles/billing viewer role.
- D. Add the group for the finance team to roles/billing project/Manager role.

Answer: A

NEW QUESTION 115

You are deploying an application to a Compute Engine VM in a managed instance group. The application must be running at all times, but only a single instance of the VM should run per GCP project. How should you configure the instance group?

- A. Set autoscaling to On, set the minimum number of instances to 1, and then set the maximum number of instances to 1.
- B. Set autoscaling to Off, set the minimum number of instances to 1, and then set the maximum number of instances to 1.
- C. Set autoscaling to On, set the minimum number of instances to 1, and then set the maximum number of instances to 2.
- D. Set autoscaling to Off, set the minimum number of instances to 1, and then set the maximum number of instances to 2.

Answer: A

NEW QUESTION 118

You create a new Google Kubernetes Engine (GKE) cluster and want to make sure that it always runs a supported and stable version of Kubernetes. What should you do?

- A. Enable the Node Auto-Repair feature for your GKE cluster.
- B. Enable the Node Auto-Upgrades feature for your GKE cluster.
- C. Select the latest available cluster version for your GKE cluster.
- D. Select "Container-Optimized OS (cos)" as a node image for your GKE cluster.

Answer: B

NEW QUESTION 123

You have a virtual machine that is currently configured with 2 vCPUs and 4 GB of memory. It is running out of memory. You want to upgrade the virtual machine to have 8 GB of memory. What should you do?

- A. Rely on live migration to move the workload to a machine with more memory.
- B. Use gcloud to add metadata to the V
- C. Set the key to required-memory-size and the value to 8 GB.
- D. Stop the VM, change the machine type to n1-standard-8, and start the VM.
- E. Stop the VM, increase the memory to 8 GB, and start the VM.

Answer: D

NEW QUESTION 128

You are creating an application that will run on Google Kubernetes Engine. You have identified MongoDB as the most suitable database system for your application and want to deploy a managed MongoDB environment that provides a support SLA. What should you do?

- A. Create a Cloud Bigtable cluster and use the HBase API
- B. Deploy MongoDB Alias from the Google Cloud Marketplace
- C. Download a MongoDB installation package and run it on Compute Engine instances
- D. Download a MongoDB installation package, and run it on a Managed Instance Group

Answer: D

NEW QUESTION 129

You are the team lead of a group of 10 developers. You provided each developer with an individual Google Cloud Project that they can use as their personal sandbox to experiment with different Google Cloud solutions. You want to be notified if any of the developers are spending above \$500 per month on their sandbox environment. What should you do?

- A. Create a single budget for all projects and configure budget alerts on this budget.
- B. Create a separate billing account per sandbox project and enable BigQuery billing export
- C. Create a Data Studio dashboard to plot the spending per billing account.
- D. Create a budget per project and configure budget alerts on all of these budgets.
- E. Create a single billing account for all sandbox projects and enable BigQuery billing export
- F. Create a Data Studio dashboard to plot the spending per project.

Answer: C

NEW QUESTION 133

You have designed a solution on Google Cloud Platform (GCP) that uses multiple GCP products. Your company has asked you to estimate the costs of the solution. You need to provide estimates for the monthly total cost. What should you do?

- A. For each GCP product in the solution, review the pricing details on the products pricing pag
- B. Use the pricing calculator to total the monthly costs for each GCP product.
- C. For each GCP product in the solution, review the pricing details on the products pricing pag
- D. Create a Google Sheet that summarizes the expected monthly costs for each product.
- E. Provision the solution on GC
- F. Leave the solution provisioned for 1 wee
- G. Navigate to the Billing Report page in the Google Cloud Platform Consol
- H. Multiply the 1 week cost to determine the monthly costs.
- I. Provision the solution on GC
- J. Leave the solution provisioned for 1 wee
- K. Use Stackdriver to determine the provisioned and used resource amount
- L. Multiply the 1 week cost to determine the monthly costs.

Answer: A

NEW QUESTION 138

You are assigned to maintain a Google Kubernetes Engine (GKE) cluster named dev that was deployed on Google Cloud. You want to manage the GKE configuration using the command line interface (CLI). You have just downloaded and installed the Cloud SDK. You want to ensure that future CLI commands by default address this specific cluster. What should you do?

- A. Use the command `gcloud config set container/cluster dev`
- B. Use the command `gcloud container clusters update dev`
- C. Create a file called `gk`
- D. default in the `~/gcloud` folder that contains the cluster name
- E. Create a file called `default`
- F. `json` in the `~/gcloud` folder that contains the cluster name

Answer: B

NEW QUESTION 143

You have a web application deployed as a managed instance group. You have a new version of the application to gradually deploy. Your web application is currently receiving live web traffic. You want to ensure that the available capacity does not decrease during the deployment. What should you do?

- A. Perform a rolling-action start-update with `maxSurge` set to 0 and `maxUnavailable` set to 1.
- B. Perform a rolling-action start-update with `maxSurge` set to 1 and `maxUnavailable` set to 0.
- C. Create a new managed instance group with an updated instance templat
- D. Add the group to the backend service for the load balance
- E. When all instances in the new managed instance group are healthy, delete the old managed instance group.
- F. Create a new instance template with the new application versio
- G. Update the existing managed instance group with the new instance templat
- H. Delete the instances in the managed instance group to allow the managed instance group to recreate the instance using the new instance template.

Answer: B

NEW QUESTION 147

You host a static website on Cloud Storage. Recently, you began to include links to PDF files on this site.

Currently, when users click on the links to these PDF files, their browsers prompt them to save the file onto their local system. Instead, you want the clicked PDF files to be displayed within the browser window directly, without prompting the user to save the file locally. What should you do?

- A. Enable Cloud CDN on the website frontend.
- B. Enable 'Share publicly' on the PDF file objects.
- C. Set Content-Type metadata to `application/pdf` on the PDF file objects.
- D. Add a label to the storage bucket with a key of `Content-Type` and value of `application/pdf`.

Answer: C

NEW QUESTION 152

You have 32 GB of data in a single file that you need to upload to a Nearline Storage bucket. The WAN connection you are using is rated at 1 Gbps, and you are the only one on the connection. You want to use as much of the rated 1 Gbps as possible to transfer the file rapidly. How should you upload the file?

- A. Use the GCP Console to transfer the file instead of `gsutil`.
- B. Enable parallel composite uploads using `gsutil` on the file transfer.
- C. Decrease the TCP window size on the machine initiating the transfer.
- D. Change the storage class of the bucket from Nearline to Multi-Regional.

Answer: B

NEW QUESTION 153

An employee was terminated, but their access to Google Cloud Platform (GCP) was not removed until 2 weeks later. You need to find out this employee accessed any sensitive customer information after their termination. What should you do?

- A. View System Event Logs in Stackdrive
- B. Search for the user's email as the principal.
- C. View System Event Logs in Stackdrive
- D. Search for the service account associated with the user.
- E. View Data Access audit logs in Stackdrive
- F. Search for the user's email as the principal.
- G. View the Admin Activity log in Stackdrive
- H. Search for the service account associated with the user.

Answer: B

NEW QUESTION 157

You have an application that uses Cloud Spanner as a database backend to keep current state information about users. Cloud Bigtable logs all events triggered by users. You export Cloud Spanner data to Cloud Storage during daily backups. One of your analysts asks you to join data from Cloud Spanner and Cloud Bigtable for specific users. You want to complete this ad hoc request as efficiently as possible. What should you do?

- A. Create a dataflow job that copies data from Cloud Bigtable and Cloud Storage for specific users.
- B. Create a dataflow job that copies data from Cloud Bigtable and Cloud Spanner for specific users.
- C. Create a Cloud Dataproc cluster that runs a Spark job to extract data from Cloud Bigtable and Cloud Storage for specific users.
- D. Create two separate BigQuery external tables on Cloud Storage and Cloud Bigtable.
- E. Use the BigQuery console to join these tables through user fields, and apply appropriate filters.

Answer: D

NEW QUESTION 161

You have created an application that is packaged into a Docker image. You want to deploy the Docker image as a workload on Google Kubernetes Engine. What should you do?

- A. Upload the image to Cloud Storage and create a Kubernetes Service referencing the image
- B. Upload the image to Cloud Storage and create a Kubernetes Deployment referencing the image
- C. Upload the image to Container Registry and create a Kubernetes Service referencing the image.
- D. Upload the image to Container Registry and create a Kubernetes Deployment referencing the image

Answer: C

NEW QUESTION 163

You have production and test workloads that you want to deploy on Compute Engine. Production VMs need to be in a different subnet than the test VMs. All the VMs must be able to reach each other over internal IP without creating additional routes. You need to set up VPC and the 2 subnets. Which configuration meets these requirements?

- A. Create a single custom VPC with 2 subnets
- B. Create each subnet in a different region and with a different CIDR range.
- C. Create a single custom VPC with 2 subnets
- D. Create each subnet in the same region and with the same CIDR range.
- E. Create 2 custom VPCs, each with a single subnet
- F. Create each subnet in a different region and with a different CIDR range.
- G. Create 2 custom VPCs, each with a single subnet
- H. Create each subnet in the same region and with the same CIDR range.

Answer: A

NEW QUESTION 167

&. You are working for a hospital that stores its medical images in an on-premises data room. The hospital wants to use Cloud Storage for archival storage of these images. The hospital wants an automated process to upload any new medical images to Cloud Storage. You need to design and implement a solution. What should you do?

- A. Deploy a Dataflow job from the batch template "Datastore to Cloud Storage" Schedule the batch job on the desired interval
- B. In the Cloud Console, go to Cloud Storage Upload the relevant images to the appropriate bucket
- C. Create a script that uses the gsutil command line interface to synchronize the on-premises storage with Cloud Storage Schedule the script as a cron job
- D. Create a Pub/Sub topic, and enable a Cloud Storage trigger for the Pub/Sub topic
- E. Create an application that sends all medical images to the Pub/Sub topic

Answer: A

NEW QUESTION 171

You are configuring service accounts for an application that spans multiple projects. Virtual machines (VMs) running in the web-applications project need access to BigQuery datasets in crm-databases-proj. You want to follow Google-recommended practices to give access to the service account in the web-applications project. What should you do?

- A. Give "project owner" for web-applications appropriate roles to crm-databases-proj
- B. Give "project owner" role to crm-databases-proj and the web-applications project.
- C. Give "project owner" role to crm-databases-proj and bigquery.dataViewer role to web-applications.
- D. Give bigquery.dataViewer role to crm-databases-proj and appropriate roles to web-applications.

Answer: D

NEW QUESTION 175

You are hosting an application on bare-metal servers in your own data center. The application needs access to Cloud Storage. However, security policies prevent the servers hosting the application from having public IP addresses or access to the internet. You want to follow Google-recommended practices to provide the application with access to Cloud Storage. What should you do?

- A. 1. Use nslookup to get the IP address for storage.googleapis.com.2. Negotiate with the security team to be able to give a public IP address to the servers.3. Only allow egress traffic from those servers to the IP addresses for storage.googleapis.com.
- B. 1. Using Cloud VPN, create a VPN tunnel to a Virtual Private Cloud (VPC) in Google Cloud Platform (GCP).2. In this VPC, create a Compute Engine instance and install the Squid proxy server on this instance.3. Configure your servers to use that instance as a proxy to access Cloud Storage.
- C. 1. Use Migrate for Compute Engine (formerly known as Velostrata) to migrate those servers to Compute Engine.2. Create an internal load balancer (ILB) that uses storage.googleapis.com as backend.3. Configure your new instances to use this ILB as proxy.
- D. 1. Using Cloud VPN or Interconnect, create a tunnel to a VPC in GCP.2. Use Cloud Router to create a custom route advertisement for 199.36.153.4/30. Announce that network to your on-premises network through the VPN tunnel.3. In your on-premises network, configure your DNS server to resolve *.googleapis.com as a CNAME to restricted.googleapis.com.

Answer: D

NEW QUESTION 179

You want to add a new auditor to a Google Cloud Platform project. The auditor should be allowed to read, but not modify, all project items. How should you configure the auditor's permissions?

- A. Create a custom role with view-only project permission
- B. Add the user's account to the custom role.
- C. Create a custom role with view-only service permission
- D. Add the user's account to the custom role.
- E. Select the built-in IAM project Viewer role
- F. Add the user's account to this role.
- G. Select the built-in IAM service Viewer role
- H. Add the user's account to this role.

Answer: C

NEW QUESTION 183

You created several resources in multiple Google Cloud projects. All projects are linked to different billing accounts. To better estimate future charges, you want to have a single visual representation of all costs incurred. You want to include new cost data as soon as possible. What should you do?

- A. Configure Billing Data Export to BigQuery and visualize the data in Data Studio.
- B. Visit the Cost Table page to get a CSV export and visualize it using Data Studio.
- C. Fill all resources in the Pricing Calculator to get an estimate of the monthly cost.
- D. Use the Reports view in the Cloud Billing Console to view the desired cost information.

Answer: A

NEW QUESTION 186

A team of data scientists infrequently needs to use a Google Kubernetes Engine (GKE) cluster that you manage. They require GPUs for some long-running, non-restartable jobs. You want to minimize cost. What should you do?

- A. Enable node auto-provisioning on the GKE cluster.
- B. Create a VerticalPodAutoscaler for those workloads.
- C. Create a node pool with preemptible VMs and GPUs attached to those VMs.
- D. Create a node pool of instances with GPUs, and enable autoscaling on this node pool with a minimum size of 1.

Answer: C

NEW QUESTION 191

You have sensitive data stored in three Cloud Storage buckets and have enabled data access logging. You want to verify activities for a particular user for these buckets, using the fewest possible steps. You need to verify the addition of metadata labels and which files have been viewed from those buckets. What should you do?

- A. Using the GCP Console, filter the Activity log to view the information.
- B. Using the GCP Console, filter the Stackdriver log to view the information.
- C. View the bucket in the Storage section of the GCP Console.
- D. Create a trace in Stackdriver to view the information.

Answer: A

NEW QUESTION 194

You are managing several Google Cloud Platform (GCP) projects and need access to all logs for the past 60 days. You want to be able to explore and quickly analyze the log contents. You want to follow Google-recommended practices to obtain the combined logs for all projects. What should you do?

- A. Navigate to Stackdriver Logging and select resource.labels.project_id=""
- B. Create a Stackdriver Logging Export with a Sink destination to a BigQuery dataset
- C. Configure the table expiration to 60 days.
- D. Create a Stackdriver Logging Export with a Sink destination to Cloud Storage
- E. Create a lifecycle rule to delete objects after 60 days.
- F. Configure a Cloud Scheduler job to read from Stackdriver and store the logs in BigQuery
- G. Configure the table expiration to 60 days.

Answer: B

NEW QUESTION 197

You have a Dockerfile that you need to deploy on Kubernetes Engine. What should you do?

- A. Use kubectl app deploy <dockerfilename>.
- B. Use gcloud app deploy <dockerfilename>.
- C. Create a docker image from the Dockerfile and upload it to Container Registr
- D. Create a Deployment YAML file to point to that imag
- E. Use kubectl to create the deployment with that file.
- F. Create a docker image from the Dockerfile and upload it to Cloud Storag
- G. Create a Deployment YAML file to point to that imag
- H. Use kubectl to create the deployment with that file.

Answer: C

NEW QUESTION 202

You are building an application that will run in your data center. The application will use Google Cloud Platform (GCP) services like AutoML. You created a service account that has appropriate access to AutoML. You need to enable authentication to the APIs from your on-premises environment. What should you do?

- A. Use service account credentials in your on-premises application.
- B. Use gcloud to create a key file for the service account that has appropriate permissions.
- C. Set up direct interconnect between your data center and Google Cloud Platform to enable authentication for your on-premises applications.
- D. Go to the IAM & admin console, grant a user account permissions similar to the service account permissions, and use this user account for authentication from your data center.

Answer: B

NEW QUESTION 203

You need to create a custom VPC with a single subnet. The subnet's range must be as large as possible. Which range should you use?

- A. .00.0.0/0
- B. 10.0.0.0/8
- C. 172.16.0.0/12
- D. 192.168.0.0/16

Answer: B

Explanation:

https://cloud.google.com/vpc/docs/vpc#manually_created_subnet_ip_ranges

NEW QUESTION 207

Several employees at your company have been creating projects with Cloud Platform and paying for it with their personal credit cards, which the company reimburses. The company wants to centralize all these projects under a single, new billing account. What should you do?

- A. Contact cloud-billing@google.com with your bank account details and request a corporate billing account for your company.
- B. Create a ticket with Google Support and wait for their call to share your credit card details over the phone.
- C. In the Google Platform Console, go to the Resource Manage and move all projects to the root Organization.
- D. In the Google Cloud Platform Console, create a new billing account and set up a payment method.

Answer: D

NEW QUESTION 211

Your organization uses Active Directory (AD) to manage user identities. Each user uses this identity for federated access to various on-premises systems. Your security team has adopted a policy that requires users to log into Google Cloud with their AD identity instead of their own login. You want to follow the Google-recommended practices to implement this policy. What should you do?

- A. Sync Identities with Cloud Directory Sync, and then enable SAML for single sign-on
- B. Sync Identities in the Google Admin console, and then enable Oauth for single sign-on
- C. Sync identities with 3rd party LDAP sync, and then copy passwords to allow simplified login with (he same credentials
- D. Sync identities with Cloud Directory Sync, and then copy passwords to allow simplified login with the same credentials.

Answer: A

NEW QUESTION 212

A colleague handed over a Google Cloud Platform project for you to maintain. As part of a security checkup, you want to review who has been granted the Project Owner role. What should you do?

- A. In the console, validate which SSH keys have been stored as project-wide keys.
- B. Navigate to Identity-Aware Proxy and check the permissions for these resources.
- C. Enable Audit Logs on the IAM & admin page for all resources, and validate the results.
- D. Use the command gcloud projects get-iam-policy to view the current role assignments.

Answer: B

NEW QUESTION 217

You have created a code snippet that should be triggered whenever a new file is uploaded to a Cloud Storage bucket. You want to deploy this code snippet. What

should you do?

- A. Use App Engine and configure Cloud Scheduler to trigger the application using Pub/Sub.
- B. Use Cloud Functions and configure the bucket as a trigger resource.
- C. Use Google Kubernetes Engine and configure a CronJob to trigger the application using Pub/Sub.
- D. Use Dataflow as a batch job, and configure the bucket as a data source.

Answer: A

NEW QUESTION 218

You have been asked to set up Object Lifecycle Management for objects stored in storage buckets. The objects are written once and accessed frequently for 30 days. After 30 days, the objects are not read again unless there is a special need. The object should be kept for three years, and you need to minimize cost. What should you do?

- A. Set up a policy that uses Nearline storage for 30 days and then moves to Archive storage for three years.
- B. Set up a policy that uses Standard storage for 30 days and then moves to Archive storage for three years.
- C. Set up a policy that uses Nearline storage for 30 days, then moves the Coldline for one year, and then moves to Archive storage for two years.
- D. Set up a policy that uses Standard storage for 30 days, then moves to Coldline for one year, and then moves to Archive storage for two years.

Answer: A

NEW QUESTION 223

Your company implemented BigQuery as an enterprise data warehouse. Users from multiple business units run queries on this data warehouse. However, you notice that query costs for BigQuery are very high, and you need to control costs. Which two methods should you use? (Choose two.)

- A. Split the users from business units to multiple projects.
- B. Apply a user- or project-level custom query quota for BigQuery data warehouse.
- C. Create separate copies of your BigQuery data warehouse for each business unit.
- D. Split your BigQuery data warehouse into multiple data warehouses for each business unit.
- E. Change your BigQuery query model from on-demand to flat rat
- F. Apply the appropriate number of slots to each Project.

Answer: BE

NEW QUESTION 228

You are running a data warehouse on BigQuery. A partner company is offering a recommendation engine based on the data in your data warehouse. The partner company is also running their application on Google Cloud. They manage the resources in their own project, but they need access to the BigQuery dataset in your project. You want to provide the partner company with access to the dataset What should you do?

- A. Create a Service Account in your own project, and grant this Service Account access to BigQuery in your project
- B. Create a Service Account in your own project, and ask the partner to grant this Service Account access to BigQuery in their project
- C. Ask the partner to create a Service Account in their project, and have them give the Service Account access to BigQuery in their project
- D. Ask the partner to create a Service Account in their project, and grant their Service Account access to the BigQuery dataset in your project

Answer: D

NEW QUESTION 232

You want to find out when users were added to Cloud Spanner Identity Access Management (IAM) roles on your Google Cloud Platform (GCP) project. What should you do in the GCP Console?

- A. Open the Cloud Spanner console to review configurations.
- B. Open the IAM & admin console to review IAM policies for Cloud Spanner roles.
- C. Go to the Stackdriver Monitoring console and review information for Cloud Spanner.
- D. Go to the Stackdriver Logging console, review admin activity logs, and filter them for Cloud Spanner IAM roles.

Answer: B

NEW QUESTION 234

You are deploying a production application on Compute Engine. You want to prevent anyone from accidentally destroying the instance by clicking the wrong button. What should you do?

- A. Disable the flag "Delete boot disk when instance is deleted."
- B. Enable delete protection on the instance.
- C. Disable Automatic restart on the instance.
- D. Enable Preemptibility on the instance.

Answer: A

NEW QUESTION 238

Your company set up a complex organizational structure on Google Cloud Platform. The structure includes hundreds of folders and projects. Only a few team members should be able to view the hierarchical structure. You need to assign minimum permissions to these team members and you want to follow Google-recommended practices. What should you do?

- A. Add the users to roles/browser role.
- B. Add the users to roles/iam.roleViewer role.
- C. Add the users to a group, and add this group to roles/browser role.
- D. Add the users to a group, and add this group to roles/iam.roleViewer role.

Answer: C

NEW QUESTION 242

Your organization has a dedicated person who creates and manages all service accounts for Google Cloud projects. You need to assign this person the minimum role for projects. What should you do?

- A. Add the user to roles/iam.roleAdmin role.
- B. Add the user to roles/iam.securityAdmin role.
- C. Add the user to roles/iam.serviceAccountUser role.
- D. Add the user to roles/iam.serviceAccountAdmin role.

Answer: C

NEW QUESTION 244

You significantly changed a complex Deployment Manager template and want to confirm that the dependencies of all defined resources are properly met before committing it to the project. You want the most rapid feedback on your changes. What should you do?

- A. Use granular logging statements within a Deployment Manager template authored in Python.
- B. Monitor activity of the Deployment Manager execution on the Stackdriver Logging page of the GCP Console.
- C. Execute the Deployment Manager template against a separate project with the same configuration, and monitor for failures.
- D. Execute the Deployment Manager template using the `--preview` option in the same project, and observe the state of interdependent resources.

Answer: D

NEW QUESTION 249

You need to set up a policy so that videos stored in a specific Cloud Storage Regional bucket are moved to Coldline after 90 days, and then deleted after one year from their creation. How should you set up the policy?

- A. Use Cloud Storage Object Lifecycle Management using Age conditions with SetStorageClass and Delete action
- B. Set the SetStorageClass action to 90 days and the Delete action to 275 days (365 – 90)
- C. Use Cloud Storage Object Lifecycle Management using Age conditions with SetStorageClass and Delete action
- D. Set the SetStorageClass action to 90 days and the Delete action to 365 days.
- E. Use gsutil rewrite and set the Delete action to 275 days (365-90).
- F. Use gsutil rewrite and set the Delete action to 365 days.

Answer: A

NEW QUESTION 251

You need to create an autoscaling managed instance group for an HTTPS web application. You want to make sure that unhealthy VMs are recreated. What should you do?

- A. Create a health check on port 443 and use that when creating the Managed Instance Group.
- B. Select Multi-Zone instead of Single-Zone when creating the Managed Instance Group.
- C. In the Instance Template, add the label 'health-check'.
- D. In the Instance Template, add a startup script that sends a heartbeat to the metadata server.

Answer: C

NEW QUESTION 253

You need to track and verify modifications to a set of Google Compute Engine instances in your Google Cloud project. In particular, you want to verify OS system patching events on your virtual machines (VMs). What should you do?

- A. Review the Compute Engine activity logs Select and review the Admin Event logs
- B. Review the Compute Engine activity logs Select and review the System Event logs
- C. Install the Cloud Logging Agent In Cloud Logging review the Compute Engine syslog logs
- D. Install the Cloud Logging Agent In Cloud Logging, review the Compute Engine operation logs

Answer: A

NEW QUESTION 257

You are creating a Google Kubernetes Engine (GKE) cluster with a cluster autoscaler feature enabled. You need to make sure that each node of the cluster will run a monitoring pod that sends container metrics to a third-party monitoring solution. What should you do?

- A. Deploy the monitoring pod in a StatefulSet object.
- B. Deploy the monitoring pod in a DaemonSet object.
- C. Reference the monitoring pod in a Deployment object.
- D. Reference the monitoring pod in a cluster initializer at the GKE cluster creation time.

Answer: B

NEW QUESTION 258

You need to reduce GCP service costs for a division of your company using the fewest possible steps. You need to turn off all configured services in an existing GCP project. What should you do?

- A. * 1. Verify that you are assigned the Project Owners IAM role for this project.* 2. Locate the project in the GCP console, click Shut down and then enter the

project ID.

- B. * 1. Verify that you are assigned the Project Owners IAM role for this project.* 2. Switch to the project in the GCP console, locate the resources and delete them.
- C. 1. Verify that you are assigned the Organizational Administrator IAM role for this project.* 2. Locate the project in the GCP console, enter the project ID and then click Shut down.
- D. * 1. Verify that you are assigned the Organizational Administrators IAM role for this project.* 2. Switch to the project in the GCP console, locate the resources and delete them.

Answer: C

NEW QUESTION 262

Your company has a single sign-on (SSO) identity provider that supports Security Assertion Markup Language (SAML) integration with service providers. Your company has users in Cloud Identity. You would like users to authenticate using your company's SSO provider. What should you do?

- A. In Cloud Identity, set up SSO with Google as an identity provider to access custom SAML apps.
- B. In Cloud Identity, set up SSO with a third-party identity provider with Google as a service provider.
- C. Obtain OAuth 2.0 credentials, configure the user consent screen, and set up OAuth 2.0 for Mobile & Desktop Apps.
- D. Obtain OAuth 2.0 credentials, configure the user consent screen, and set up OAuth 2.0 for Web Server Applications.

Answer: C

NEW QUESTION 265

You have been asked to create robust Virtual Private Network (VPN) connectivity between a new Virtual Private Cloud (VPC) and a remote site. Key requirements include dynamic routing, a shared address space of 10.19.0.1/22, and no overprovisioning of tunnels during a failover event. You want to follow Google-recommended practices to set up a high availability Cloud VPN. What should you do?

- A. Use a custom mode VPC network, configure static routes, and use active/passive routing
- B. Use an automatic mode VPC network, configure static routes, and use active/active routing
- C. Use a custom mode VPC network use Cloud Router border gateway protocol (86P) routes, and use active/passive routing
- D. Use an automatic mode VPC network, use Cloud Router border gateway protocol (BGP) routes and configure policy-based routing

Answer: D

NEW QUESTION 268

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your Associate-Cloud-Engineer Exam with Our Prep Materials Via below:

<https://www.certleader.com/Associate-Cloud-Engineer-dumps.html>