

NSE4_FGT-7.2 Dumps

Fortinet NSE 4 - FortiOS 7.2

https://www.certleader.com/NSE4_FGT-7.2-dumps.html



NEW QUESTION 1

If Internet Service is already selected as Destination in a firewall policy, which other configuration object can be selected for the Destination field of a firewall policy?

- A. IP address
- B. No other object can be added
- C. FQDN address
- D. User or User Group

Answer: B

Explanation:

FortiGate Security 7.2 Study Guide (p.59): "When configuring your firewall policy, you can use Internet Service as the destination in a firewall policy, which contains all the IP addresses, ports, and protocols used by that service. For the same reason, you cannot mix regular address objects with ISDB objects, and you cannot select services on a firewall policy. The ISDB objects already have services information, which is hardcoded."

This is true because Internet Service is a special type of destination object that can only be used alone in a firewall policy. Internet Service is a feature that allows FortiGate to identify and filter traffic based on the internet service or application that it belongs to, such as Facebook, YouTube, Skype, etc. Internet Service uses a database of IP addresses and ports that are associated with each internet service or application, and updates it regularly from FortiGuard. When Internet Service is selected as the destination in a firewall policy, FortiGate will match the traffic to the corresponding internet service or application, and apply the appropriate action and security profiles to it. However, Internet Service cannot be combined with any other destination object, such as IP address, FQDN address, user or user group, etc., as this would create a conflict or ambiguity in the firewall policy. Therefore, no other object can be added if Internet Service is already selected as the destination in a firewall policy

NEW QUESTION 2

A network administrator has enabled full SSL inspection and web filtering on FortiGate. When visiting any HTTPS websites, the browser reports certificate warning errors. When visiting HTTP websites, the browser does not report errors.

What is the reason for the certificate warning errors?

- A. The matching firewall policy is set to proxy inspection mode.
- B. The certificate used by FortiGate for SSL inspection does not contain the required certificate extensions.
- C. The full SSL inspection feature does not have a valid license.
- D. The browser does not trust the certificate used by FortiGate for SSL inspection.

Answer: D

Explanation:

FortiGate Security 7.2 Study Guide (p.235): "If FortiGate receives a trusted SSL certificate, then it generates a temporary certificate signed by the built-in Fortinet_CA_SSL certificate and sends it to the browser. If the browser trusts the Fortinet_CA_SSL certificate, the browser completes the SSL handshake. Otherwise, the browser also presents a warning message informing the user that the site is untrusted. In other words, for this function to work as intended, you must import the Fortinet_CA_SSL certificate into the trusted root CA certificate store of your browser."

NEW QUESTION 3

Which two statements explain antivirus scanning modes? (Choose two.)

- A. In proxy-based inspection mode, files bigger than the buffer size are scanned.
- B. In flow-based inspection mode, FortiGate buffers the file, but also simultaneously transmits it to the client.
- C. In proxy-based inspection mode, antivirus scanning buffers the whole file for scanning, before sending it to the client.
- D. In flow-based inspection mode, files bigger than the buffer size are scanned.

Answer: BC

Explanation:

An antivirus profile in full scan mode buffers up to your specified file size limit. The default is 10 MB. That is large enough for most files, except video files. If your FortiGate model has more RAM, you may be able to increase this threshold. Without a limit, very large files could exhaust the scan memory. So, this threshold balances risk and performance. Is this tradeoff unique to FortiGate, or to a specific model? No. Regardless of vendor or model, you must make a choice. This is because of the difference between scans in theory, that have no limits, and scans on real-world devices, that have finite RAM. In order to detect 100% of malware regardless of file size, a firewall would need infinitely large RAM--something that no device has in the real world. Most viruses are very small. This table shows a typical tradeoff. You can see that with the default 10 MB threshold, only 0.01% of viruses pass through.

FortiGate Security 7.2 Study Guide (p.350 & 352): "In flow-based inspection mode, the IPS engine reads the payload of each packet, caches a local copy, and forwards the packet to the receiver at the same time. Because the file is transmitted simultaneously, flow-based mode consumes more CPU cycles than proxy-based." "Each protocol's proxy picks up a connection and buffers the entire file first (or waits until the oversize limit is reached) before scanning. The client must wait for the scanning to finish."

NEW QUESTION 4

Refer to the exhibit.

A network administrator is troubleshooting an IPsec tunnel between two FortiGate devices. The administrator has determined that phase 1 status is up, but phase 2 fails to come up.



Based on the phase 2 configuration shown in the exhibit, which configuration change will bring phase 2 up?

- A. On Remote-FortiGate, set Seconds to 43200.
- B. On HQ-FortiGate, set Encryption to AES256.
- C. On HQ-FortiGate, enable Diffie-Hellman Group 2.
- D. On HQ-FortiGate, enable Auto-negotiate.

Answer: B

NEW QUESTION 5

Refer to the FortiGuard connection debug output.

```
FortiGate # diagnose debug rating
Locale      : english

Service     : Web-Filter
Status      : Enable
License     : Contract

Num. of servers : 3
Protocol    : https
Port       : 443
Anycast    : Disable
Default servers : Included
-- Server List (Mon Jul 5 12:00:25 2021) --
IP          Weight  RTT  Flags  TZ  FortiGuard-requests  Curr  Lost  Total  Lost  Updated Time
173.243.138.210  10    350  DI   -8    29      0    0      0      0    Mon Jul 5 09:23:33 2021
12.34.97.18     20    30   -5   -5    25      0    0      0      0    Mon Jul 5 09:23:33 2021
210.7.96.18    160   605   9    9    25      0    0      0      0    Mon Jul 5 09:23:33 2021
```

Based on the output shown in the exhibit, which two statements are correct? (Choose two.)

- A. A local FortiManager is one of the servers FortiGate communicates with.
- B. One server was contacted to retrieve the contract information.
- C. There is at least one server that lost packets consecutively.
- D. FortiGate is using default FortiGuard communication settings.

Answer: BD

Explanation:

FortiGate Security 7.2 Study Guide (p.287-288): "Flags: D (IP returned from DNS), I (Contract server contacted), T (being timed), F (failed)" "By default, FortiGate is configured to enforce the use of HTTPS port 443 to perform live filtering with FortiGuard or FortiManager. Other ports and protocols are available by disabling the FortiGuard anycast setting on the CLI."

NEW QUESTION 6

Which statement about the policy ID number of a firewall policy is true?

- A. It is required to modify a firewall policy using the CLI.
- B. It represents the number of objects used in the firewall policy.
- C. It changes when firewall policies are reordered.
- D. It defines the order in which rules are processed.

Answer: A

NEW QUESTION 7

Which engine handles application control traffic on the next-generation firewall (NGFW) FortiGate?

- A. Antivirus engine
- B. Intrusion prevention system engine
- C. Flow engine
- D. Detection engine

Answer: B

Explanation:

<http://docs.fortinet.com/document/fortigate/6.0.0/handbook/240599/application-control>

NEW QUESTION 8

Which two statements describe how the RPF check is used? (Choose two.)

- A. The RPF check is a mechanism that protects FortiGate and the network from IP spoofing attacks.
- B. The RPF check is run on the first sent and reply packet of any new session.
- C. The RPF check is run on the first sent packet of any new session.
- D. The RPF check is run on the first reply packet of any new session.

Answer: AC

Explanation:

FortiGate Infrastructure 7.2 Study Guide (p.41): "The RPF check is a mechanism that protects FortiGate and your network from IP spoofing attacks by checking for a return path to the source in the routing table." "FortiGate performs an RPF check only on the first packet of a new session. That is, after the first packet passes the RPF check and FortiGate accepts the session, FortiGate doesn't perform any additional RPF checks on that session."

* A. The RPF check is a mechanism that protects FortiGate and the network from IP spoofing attacks.

This is true because the RPF check verifies that the source IP address of an incoming packet matches the reverse route for that address, meaning that the packet came from a legitimate source and not from an attacker who is trying to impersonate another host. This prevents IP spoofing attacks, where an attacker sends packets with a forged source IP address to bypass security policies or launch denial-of-service attacks1

* C. The RPF check is run on the first sent packet of any new session.


This is true because the RPF check is performed only once per session, on the first packet sent by either the client or the server, depending on the direction of the session initiation. This reduces the processing overhead and improves performance2

NEW QUESTION 9

Refer to the exhibit.

The exhibit shows the FortiGuard Category Based Filter section of a corporate web filter profile.

An administrator must block access to download.com, which belongs to the Freeware and Software Downloads category. The administrator must also allow other websites in the same category.

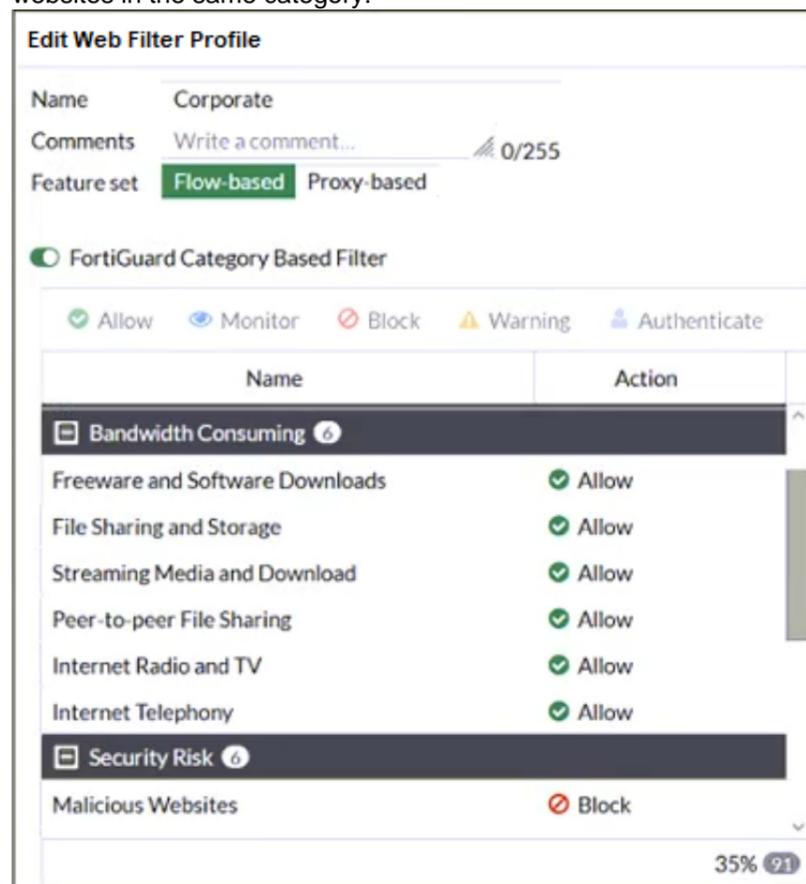

What are two solutions for satisfying the requirement? (Choose two.)

- A. Configure a separate firewall policy with action Deny and an FQDN address object for *.download.com as destination address.
- B. Configure a web override rating for download.com and select Malicious Websites as the subcategory.
- C. Set the Freeware and Software Downloads category Action to Warning.
- D. Configure a static URL filter entry for download.com with Type and Action set to Wildcard and Block, respectively.

Answer: BD

Explanation:

FortiGate Security 7.2 Study Guide (p.268-269): "If you want to make an exception, for example, rather than unblock access to a potentially unwanted category, change the website to an allowed category. You can also do the reverse. You can block a website that belongs to an allowed category." "Static URL filtering is another web filter feature. Configured URLs in the URL filter are checked against the visited websites. If a match is found, the configured action is taken. URL filtering has the same patterns as static domain filtering: simple, regular expressions, and wildcard."

* B. Configure a web override rating for download.com and select Malicious Websites as the subcategory. This is true because a web override rating is a feature that allows the administrator to change the FortiGuard category of a specific website or domain, and apply a different action to it based on the web filter profile. By configuring a web override rating for download.com and selecting Malicious Websites as the subcategory, the administrator can block access to download.com, which belongs to the Freeware and Software Downloads category by default, without affecting other websites in the same category. The Malicious Websites category has the action Block in the web filter profile shown in the exhibit.

* D. Configure a static URL filter entry for download.com with Type and Action set to Wildcard and Block, respectively. This is true because a static URL filter entry is a feature that allows the administrator to define custom rules for filtering specific URLs or domains, and apply an action to them based on the web filter profile. By configuring a static URL filter entry for download.com with Type and Action set to Wildcard and Block, respectively, the administrator can block access to download.com and any subdomains or paths under it, without affecting other websites in the Freeware and Software Downloads category. The static URL filter entries have higher priority than the FortiGuard category based filter entries in the web filter profile.

NEW QUESTION 10

What are two functions of the ZTNA rule? (Choose two.)

- A. It redirects the client request to the access proxy.
- B. It applies security profiles to protect traffic.
- C. It defines the access proxy.
- D. It enforces access control.

Answer: BD

Explanation:

A ZTNA rule is a policy that enforces access control and applies security profiles to protect traffic between the client and the access proxy¹. A ZTNA rule defines the following parameters¹:

- Incoming interface: The interface that receives the client request.
- Source: The address and user group of the client.
- ZTNA tag: The tag that identifies the domain that the client belongs to.
- ZTNA server: The server that hosts the access proxy.
- Destination: The address of the application that the client wants to access.
- Action: The action to take for the traffic that matches the rule. It can be accept, deny, or redirect.
- Security profiles: The security features to apply to the traffic, such as antivirus, web filter, application control, and so on.

A ZTNA rule does not redirect the client request to the access proxy. That is the function of a policy route that matches the ZTNA tag and sends the traffic to the ZTNA server².

A ZTNA rule does not define the access proxy. That is done by creating a ZTNA server object that specifies the IP address, port, and certificate of the access proxy³.

FortiGate Infrastructure 7.2 Study Guide (p.177): "A ZTNA rule is a proxy policy used to enforce access control. You can define ZTNA tags or tag groups to enforce zero-trust role-based access. To create a rule, type a rule name, and add IP addresses and ZTNA tags or tag groups that are allowed or blocked access. You also select the ZTNA server as the destination. You can also apply security profiles to protect this traffic."

NEW QUESTION 10

Refer to the exhibit.

```
Fortigate # diagnose sniffer packet any "icmp" 5
interfaces=[any]
filters=[icmp]
20.370482 port2 in 10.0.1.2 -> 8.8.8.8: icmp: echo request
0x0000 4500 003c 2f8f 0000 8001 f020 0a00 0102 E.</.....
0x0010 0808 0808 0800 4d5a 0001 0001 6162 6364 .....MZ....abcd
0x0020 6566 6768 696a 6b6c 6d6e 6f70 7172 7374 efghijklmnopqrst
0x0030 7576 7761 6263 6465 6667 6869 uvwabcdefghi

20.370805 port1 out 10.56.240.228 -> 8.8.8.8: icmp: echo request
0x0000 4500 003c 2f8f 0000 7f01 0106 0a38 f0e4 E.</.....8..
0x0010 0808 0808 0800 6159 ec01 0001 6162 6364 .....aY....abcd
0x0020 6566 6768 696a 6b6c 6d6e 6f70 7172 7374 efghijklmnopqrst
0x0030 7576 7761 6263 6465 6667 6869 uvwabcdefghi

20.372138 port1 in 8.8.8.8 -> 10.56.240.228: icmp: echo reply
0x0000 4500 003c 0000 0000 7501 3a95 0808 0808 E.<....u.!....
0x0010 0a38 f0e4 0000 6959 ec01 0001 6162 6364 .8....iY....abcd
0x0020 6566 6768 696a 6b6c 6d6e 6f70 7172 7374 efghijklmnopqrst
0x0030 7576 7761 6263 6465 6667 6869 uvwabcdefghi

20.372163 port2 out 8.8.8.8 -> 10.0.1.2: icmp: echo reply
0x0000 4500 003c 0000 0000 7401 2bb0 0808 0808 E.<....t.+....
0x0010 0a00 0102 0000 555a 0001 0001 6162 6364 .....UZ....abcd
0x0020 6566 6768 696a 6b6c 6d6e 6f70 7172 7374 efghijklmnopqrst
0x0030 7576 7761 6263 6465 6667 6869 uvwabcdefghi
```

An administrator is running a sniffer command as shown in the exhibit. Which three pieces of information are included in the sniffer output? (Choose three.)

- A. Interface name
- B. Ethernet header
- C. IP header
- D. Application header
- E. Packet payload

Answer: ACE

NEW QUESTION 11

An administrator is running the following sniffer command:

```
diagnose sniffer packet any "host 192.168.2.12" 5
```

Which three pieces of Information will be Included in me sniffer output? {Choose three.}

- A. Interface name
- B. Packet payload
- C. Ethernet header
- D. IP header
- E. Application header

Answer: ABD

NEW QUESTION 13

Which two protocols are used to enable administrator access of a FortiGate device? (Choose two.)

- A. SSH
- B. HTTPS
- C. FTM
- D. FortiTelemetry

Answer: AB

NEW QUESTION 17

Examine this PAC file configuration.

Which of the following statements are true? (Choose two.)

- A. Browsers can be configured to retrieve this PAC file from the FortiGate.
- B. Any web request to the 172.25. 120.0/24 subnet is allowed to bypass the proxy.
- C. All requests not made to Fortinet.com or the 172.25. 120.0/24 subnet, have to go through altproxy.corp.com: 8060.
- D. Any web request fortinet.com is allowed to bypass the proxy.

Answer: AD

NEW QUESTION 22

Which three CLI commands can you use to troubleshoot Layer 3 issues if the issue is in neither the physical layer nor the link layer? (Choose three.)

- A. diagnose sys top
- B. execute ping
- C. execute traceroute
- D. diagnose sniffer packet any
- E. get system arp

Answer: BCD

NEW QUESTION 26

Which two actions can you perform only from the root FortiGate in a Security Fabric? (Choose two.)

- A. Shut down/reboot a downstream FortiGate device.
- B. Disable FortiAnalyzer logging for a downstream FortiGate device.
- C. Log in to a downstream FortiSwitch device.
- D. Ban or unban compromised hosts.

Answer: AB

NEW QUESTION 31

An organization requires remote users to send external application data running on their PCs and access FTP resources through an SSL/TLS connection. Which FortiGate configuration can achieve this goal?

- A. SSL VPN bookmark
- B. SSL VPN tunnel
- C. Zero trust network access
- D. SSL VPN quick connection

Answer: B

Explanation:

FortiGate Infrastructure 7.2 Study Guide (p.198): "Tunnel mode requires FortiClient to connect to FortiGate. FortiClient adds a virtual network adapter identified as fortissl to the user's PC. This virtual adapter dynamically receives an IP address from FortiGate each time FortiGate establishes a new VPN connection. Inside the tunnel, all traffic is SSL/TLS encapsulated. The main advantage of tunnel mode over web mode is that after the VPN is established, any IP network application running on the client can send traffic through the tunnel."

An SSL VPN tunnel allows remote users to establish a secure and encrypted Virtual Private Network (VPN) connection to the private network using the SSL/TLS protocol¹. An SSL VPN tunnel can provide access to network resources such as FTP servers, as well as external applications running on the user's PC¹.

An SSL VPN bookmark is a web link that provides access to network resources through the SSL VPN web portal¹. It does not support external applications running on the user's PC.

Zero trust network access (ZTNA) is a security model that provides role-based application access to remote users without exposing the private network to the internet². It does not use SSL/TLS protocol, but rather a proprietary ZTNA protocol.

SSL VPN quick connection is a feature that allows users to connect to an SSL VPN tunnel without installing FortiClient or any other software on their PC³. It

requires a web browser that supports Java or ActiveX. It does not support external applications running on the user's PC.

NEW QUESTION 34

Refer to the exhibit.

The diagram shows two FortiGate devices connected via an IPsec tunnel. Below the diagram are two screenshots of the FortiGate web interface showing Phase 2 configuration for the 'ToRemote' selector.

HQ-FortiGate Configuration:

- Phase 2 Selector: ToRemote
- Local Address: 0.0.0.0/0.0.0.0
- Remote Address: 0.0.0.0/0.0.0.0
- Encryption: AES128
- Authentication: SHA1
- Diffie-Hellman Group: 5
- Key Lifetime: 43200 Seconds

Remote-FortiGate Configuration:

- Phase 2 Selector: ToRemote
- Local Address: 0.0.0.0/0.0.0.0
- Remote Address: 0.0.0.0/0.0.0.0
- Encryption: AES256
- Authentication: SHA1
- Diffie-Hellman Group: 2
- Key Lifetime: 14400 Seconds

A network administrator is troubleshooting an IPsec tunnel between two FortiGate devices. The administrator has determined that phase 1 status is up, but phase 2 fails to come up.

Based on the phase 2 configuration shown in the exhibit, what configuration change will bring phase 2 up?

- A. On HQ-FortiGate, enable Auto-negotiate.
- B. On Remote-FortiGate, set Seconds to 43200.
- C. On HQ-FortiGate, enable Diffie-Hellman Group 2.
- D. On HQ-FortiGate, set Encryption to AES256.

Answer: D

NEW QUESTION 37

Refer to the exhibit, which contains a static route configuration. An administrator created a static route for Amazon Web Services.

The screenshot shows the 'Edit Static Route' configuration in the FortiGate web interface. The configuration is as follows:

- Destination: Subnet **Internet Service**
- Gateway Address: 10.200.1.254
- Interface: port1
- Status: Enabled

Which CLI command must the administrator use to view the route?

- A. get router info routing-table database
- B. diagnose firewall route list
- C. get internet-service route list
- D. get router info routing-table all

Answer: B

Explanation:

ISDB static route will not create entry directly in routing-table. Reference: <https://community.fortinet.com/t5/FortiGate/Technical-Tip-Creating-a-static-route-for-Predefined-Internet/ta-p/1>

and here


<https://community.fortinet.com/t5/FortiGate/Technical-Tip-Verify-the-matching-policy-route/ta-p/190640>

FortiGate Infrastructure 7.2 Study Guide (p.16 and p.59): "Even though they are configured as static routes, ISDB routes are actually policy routes and take precedence over any other routes in the routing table. As such, ISDB routes are added to the policy routing table." "FortiOS maintains a policy route table that you can view by running the diagnose firewall proute list command."

NEW QUESTION 41

A network administrator is troubleshooting an IPsec tunnel between two FortiGate devices. The administrator has determined that phase 1 fails to come up. The

administrator has also re-entered the pre-shared key on both FortiGate devices to make sure they match.

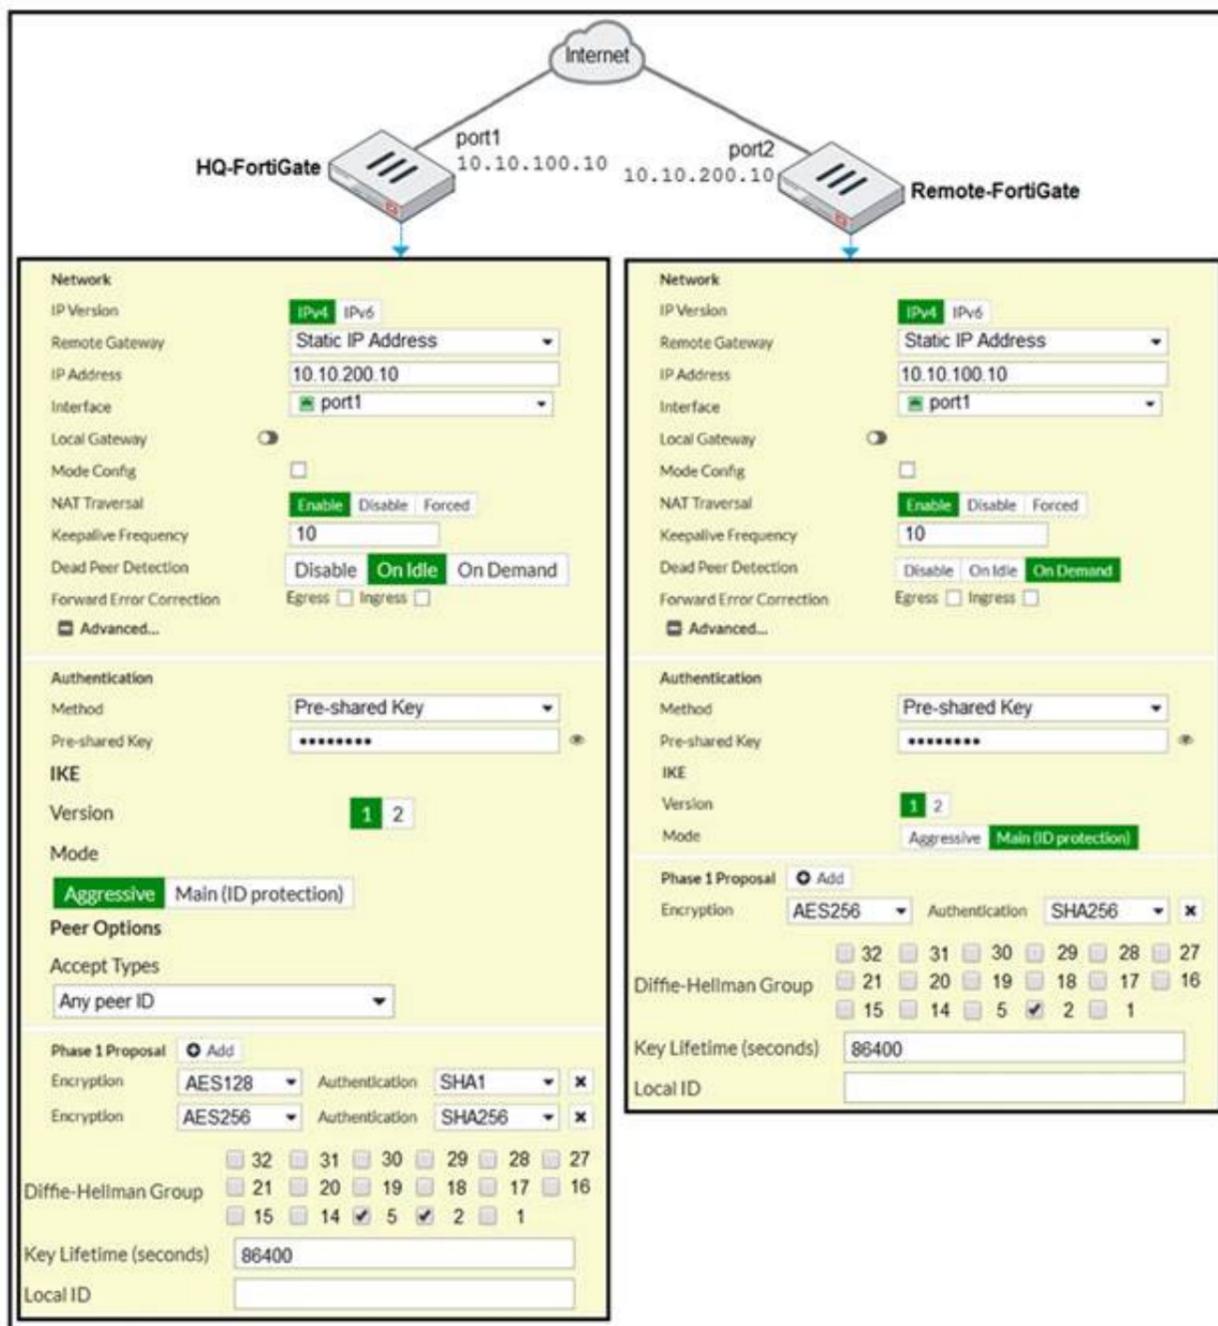

Based on the phase 1 configuration and the diagram shown in the exhibit, which two configuration changes will bring phase 1 up? (Choose two.)

- A. On HQ-FortiGate, set IKE mode to Main (ID protection).
- B. On both FortiGate devices, set Dead Peer Detection to On Demand.
- C. On HQ-FortiGate, disable Diffie-Helman group 2.
- D. On Remote-FortiGate, set port2 as Interface.

Answer: AD

Explanation:

"In IKEv1, there are two possible modes in which the IKE SA negotiation can take place: main, and aggressive mode. Settings on both ends must agree; otherwise, phase 1 negotiation fails and both IPsec peers are not able to establish a secure channel."

NEW QUESTION 43

Which two types of traffic are managed only by the management VDOM? (Choose two.)

- A. FortiGuard web filter queries
- B. PKI
- C. Traffic shaping
- D. DNS

Answer: AD

NEW QUESTION 47

Which two features of IPsec IKEv1 authentication are supported by FortiGate? (Choose two.)

- A. Extended authentication (XAuth) for faster authentication because fewer packets are exchanged
- B. Extended authentication (XAuth) to request the remote peer to provide a username and password
- C. No certificate is required on the remote peer when you set the certificate signature as the authentication method
- D. Pre-shared key and certificate signature as authentication methods

Answer: BD

Explanation:

* B. Extended authentication (XAuth) to request the remote peer to provide a username and password

This is true because extended authentication (XAuth) is a feature that allows FortiGate to request the remote peer to provide a username and password during the IPsec IKEv1 authentication process. XAuth is an extension of the IKEv1 protocol that adds an additional authentication step after the main mode or aggressive mode exchange. XAuth can be used with either pre-shared key or certificate signature as the primary authentication method, and it can provide stronger security

and granular access control for IPsec VPNs12

* D. Pre-shared key and certificate signature as authentication methods

This is true because pre-shared key and certificate signature are two authentication methods that are supported by FortiGate for IPsec IKEv1 VPNs. Pre-shared key is a method where both peers share a secret key that is used to authenticate each other during the IKEv1 exchange. Certificate signature is a method where both peers have digital certificates that are used to verify each other's identity and public key during the IKEv1 exchange. Both methods can be combined with XAuth for additional authentication

NEW QUESTION 50

Which three statements explain a flow-based antivirus profile? (Choose three.)

- A. Flow-based inspection uses a hybrid of the scanning modes available in proxy-based inspection.
- B. If a virus is detected, the last packet is delivered to the client.
- C. The IPS engine handles the process as a standalone.
- D. FortiGate buffers the whole file but transmits to the client at the same time.
- E. Flow-based inspection optimizes performance compared to proxy-based inspection.

Answer: ADE

NEW QUESTION 53

Which statements about the firmware upgrade process on an active-active HA cluster are true? (Choose two.)

- A. The firmware image must be manually uploaded to each FortiGate.
- B. Only secondary FortiGate devices are rebooted.
- C. Uninterruptable upgrade is enabled by default.
- D. Traffic load balancing is temporarily disabled while upgrading the firmware.

Answer: CD

NEW QUESTION 56

Refer to the exhibits.

Exhibit A shows a network diagram. Exhibit B shows the firewall policy configuration and a VIP object configuration.

The WAN (port1) interface has the IP address 10.200.1.1/24. The LAN (port3) interface has the IP address 10.0.1.254/24.

Exhibit A **Exhibit B**

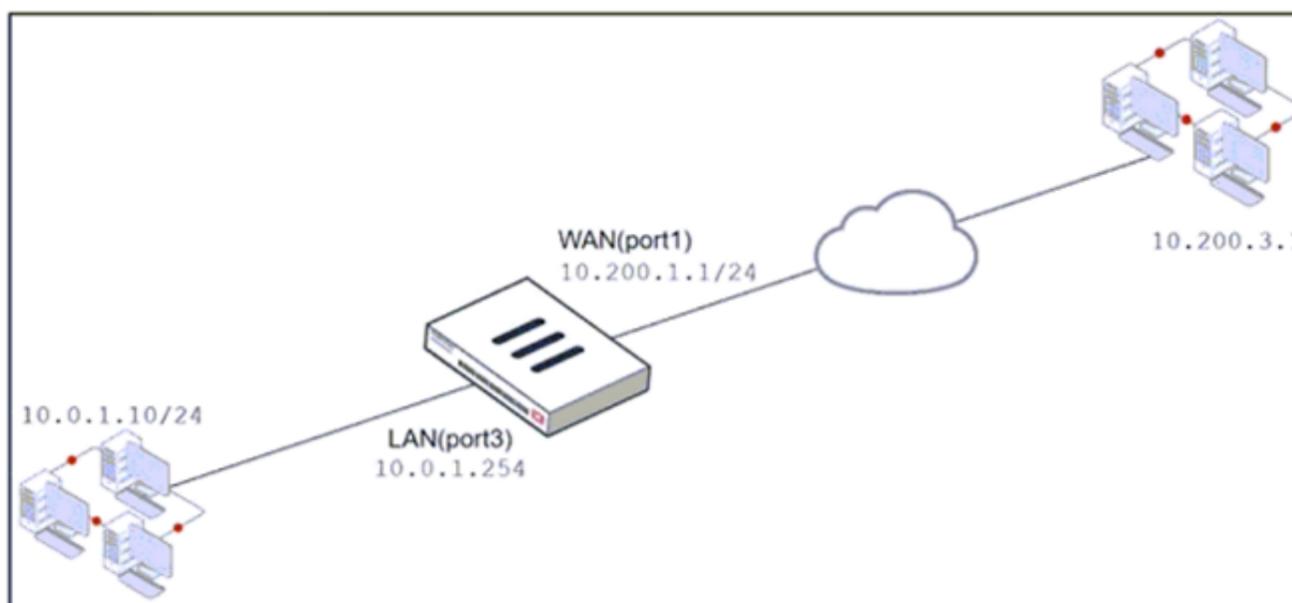


Exhibit A Exhibit B

Name	From	To	Source	Destination	Schedule	Service	Action	NAT
WebServer	WAN (port1)	LAN (port3)	all	VIP	always	ALL	ACCEPT	Enabled

Edit Virtual IP

VIP type: IPv4
 Name: VIP
 Comments: Write a comment... 0/255
 Color: Change

Network

Interface: WAN (port1)
 Type: Static NAT
 External IP address/range: 10.200.1.10
 Map to
 IPv4 address/range: 10.0.1.10

Optional Filters

Port Forwarding

Protocol: TCP UDP SCTP ICMP
 Port Mapping Type: One to one Many to many
 External service port: 10443
 Map to IPv4 port: 443

If the host 10.200.3.1 sends a TCP SYN packet on port 10443 to 10.200.1.10, what will the source address, destination address, and destination port of the packet be, after FortiGate forwards the packet to the destination?

- A. 10.0.1.254, 10.0.1.10, and 443, respectively
- B. 10.0.1.254, 10.200.1.10, and 443, respectively
- C. 10.200.3.1, 10.0.1.10, and 443, respectively
- D. 10.0.1.254, 10.0.1.10, and 10443, respectively

Answer: C

Explanation:

The host 10.200.3.1 sends a TCP SYN packet on port 10443 to 10.200.1.10, which is the external IP address of the VIP object named VIP in Exhibit B1. The VIP object maps the external IP address and port to the internal IP address and port of the server 10.0.1.10 and 443, respectively. The VIP object also enables NAT, which means that the source address of the packet will be translated to the IP address of the outgoing interface.

The firewall policy ID 1 in Exhibit B allows traffic from WAN (port1) to LAN (port3) with the destination address of VIP and the service of HTTPS1. The policy also enables NAT, which means that the source address of the packet will be translated to the IP address of the outgoing interface.

Therefore, after FortiGate forwards the packet to the destination, the source address, destination address, and destination port of the packet will be 10.200.3.1, 10.0.1.10, and 443, respectively.

You can find more information about VIP objects and firewall policies in the Fortinet Documentation

NEW QUESTION 58

Which of the following are valid actions for FortiGuard category based filter in a web filter profile ui proxy-based inspection mode? (Choose two.)

- A. Warning
- B. Exempt
- C. Allow
- D. Learn

Answer: AC

NEW QUESTION 62

Which statements best describe auto discovery VPN (ADVPN). (Choose two.)

- A. It requires the use of dynamic routing protocols so that spokes can learn the routes to other spokes.
- B. ADVPN is only supported with IKEv2.
- C. Tunnels are negotiated dynamically between spokes.
- D. Every spoke requires a static tunnel to be configured to other spokes so that phase 1 and phase 2 proposals are defined in advance.

Answer: AC

NEW QUESTION 63

Which of the following conditions must be met in order for a web browser to trust a web server certificate signed by a third-party CA?

- A. The public key of the web server certificate must be installed on the browser.
- B. The web-server certificate must be installed on the browser.
- C. The CA certificate that signed the web-server certificate must be installed on the browser.
- D. The private key of the CA certificate that signed the browser certificate must be installed on the browser.

Answer: C

NEW QUESTION 65

Which two types of traffic are managed only by the management VDOM? (Choose two.)

- A. FortiGuard web filter queries
- B. PKI
- C. Traffic shaping
- D. DNS

Answer: AD

Explanation:

FortiGate Infrastructure 7.2 Study Guide (p.73): "What about traffic originating from FortiGate? Some system daemons, such as NTP and FortiGuard updates, generate traffic coming from FortiGate. Traffic coming from FortiGate to those global services originates from the management VDOM. One, and only one, of the VDOMs on a FortiGate device is assigned the role of the management VDOM. It is important to note that the management VDOM designation is solely for traffic originated by FortiGate, such as FortiGuard updates, and has no effect on traffic passing through FortiGate."

NEW QUESTION 66

FortiGate is operating in NAT mode and is configured with two virtual LAN (VLAN) subinterfaces added to the same physical interface. In this scenario, what are two requirements for the VLAN ID? (Choose two.)

- A. The two VLAN subinterfaces can have the same VLAN ID, only if they have IP addresses in the same subnet.
- B. The two VLAN subinterfaces can have the same VLAN ID, only if they belong to different VDOMs.
- C. The two VLAN subinterfaces must have different VLAN IDs.
- D. The two VLAN subinterfaces can have the same VLAN ID, only if they have IP addresses in different subnets.

Answer: BC

Explanation:

<https://community.fortinet.com/t5/FortiGate/Technical-Note-How-to-use-emac-vlan-to-share-the-same-VLAN/t> When FortiGate is operating in NAT mode, it means that it uses network address translation (NAT) to modify the source or destination IP addresses of the traffic passing through it. NAT mode allows FortiGate to hide the IP addresses of the internal network from the external network, and to conserve IP addresses by using a single public IP address for multiple private IP addresses.

A virtual LAN (VLAN) subinterface is a logical interface that allows traffic from different VLANs to enter and exit the FortiGate unit. A VLAN subinterface is created by adding a VLAN ID to a physical interface or an aggregate interface. A VLAN ID is a numerical identifier that distinguishes one VLAN from another.

In this scenario, there are two requirements for the VLAN ID of the VLAN subinterfaces added to the same physical interface:

- > The two VLAN subinterfaces must have different VLAN IDs. This is because the VLAN ID is used to tag the traffic with the appropriate VLAN information, and to separate the traffic into different VLANs. If the two VLAN subinterfaces have the same VLAN ID, they will not be able to distinguish the traffic from each other, and they will not be able to forward the traffic to the correct destination.
- > The two VLAN subinterfaces can have the same VLAN ID, only if they belong to different VDOMs. This is because VDOMs are virtual instances of FortiGate that can have their own interfaces, policies, and routing tables. Each VDOM operates independently from other VDOMs, and can have its own VLAN subinterfaces with different or identical VLAN IDs. However, this requires inter-VDOM links to allow traffic between different VDOMs.

NEW QUESTION 68

Refer to the exhibits.

The exhibits show a network diagram and firewall configurations.

An administrator created a Deny policy with default settings to deny Webserver access for Remote-User2. Remote-User1 must be able to access the Webserver. Remote-User2 must not be able to access the Webserver.

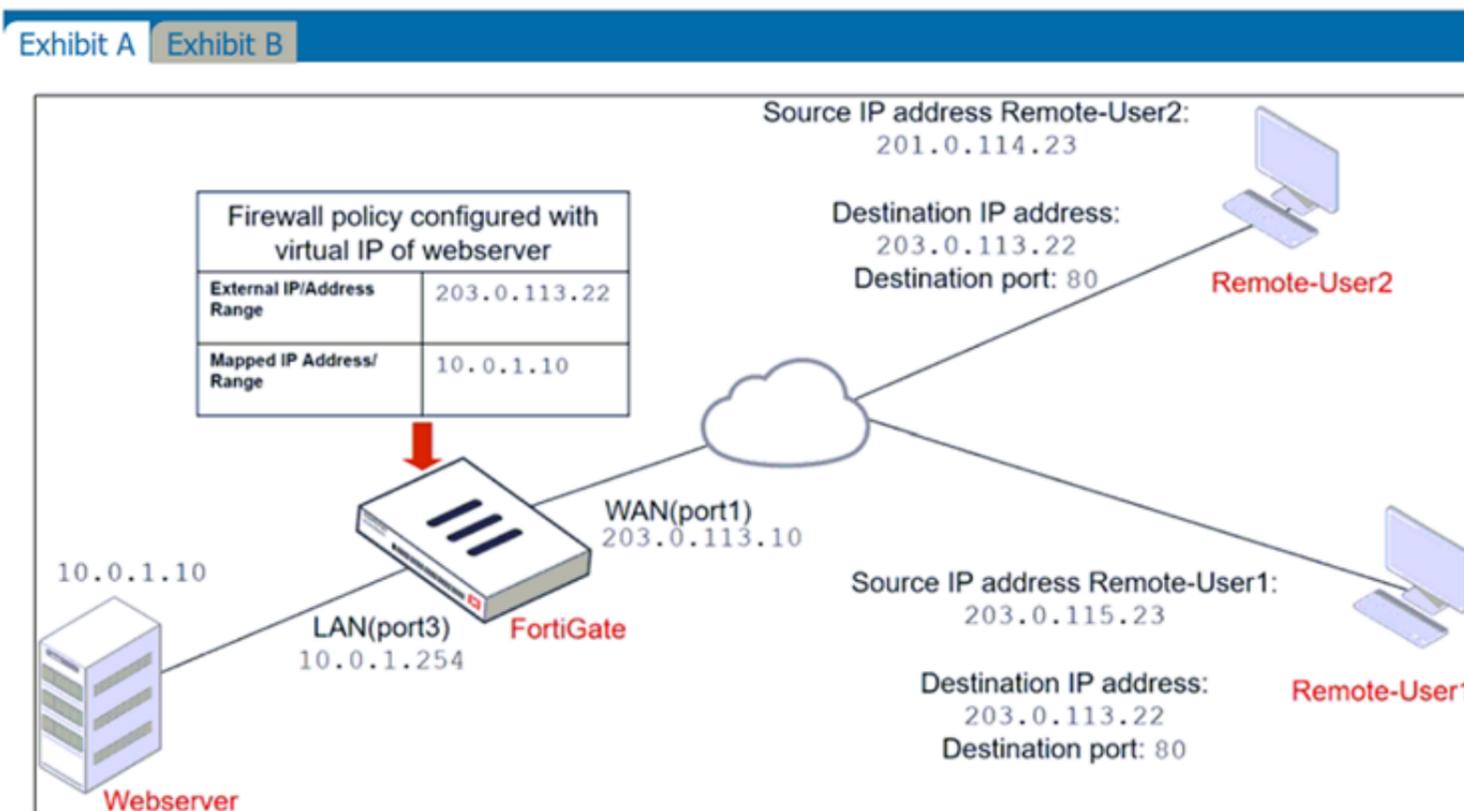


Exhibit A Exhibit B

The screenshot shows the 'Edit Address' configuration for 'Deny_IP' with the following details:

- Name: Deny_IP
- Color: Change
- Type: Subnet
- IP/Netmask: 201.0.114.23/32
- Interface: WAN (port1)
- Static route configuration:
- Comments: Deny web server access. 23/255

Below this is a table of Firewall policies:

ID	Name	Source	Destination	Schedule	Service	Action
WAN (port1) → LAN (port3) 2						
4	Deny	Deny_IP	all	always	ALL	DENY
3	Allow_access	all	Webserver	always	ALL	ACCEPT

In this scenario, which two changes can the administrator make to deny Webserver access for Remote-User2? (Choose two.)

- A. Disable match-vip in the Deny policy.
- B. Set the Destination address as Deny_IP in the Allow-access policy.
- C. Enable match vip in the Deny policy.
- D. Set the Destination address as Web_server in the Deny policy.

Answer: BC

Explanation:

<https://community.fortinet.com/t5/FortiGate/Technical-Tip-Firewall-does-not-block-incoming-WAN-to-LAN/ta> The exhibits show a network diagram and firewall configurations for a FortiGate unit that has two policies: Allow_access and Deny. The Allow_access policy allows traffic from the WAN (port1) interface to the LAN (port3) interface with the destination address of VIP and the service of HTTPS. The VIP object maps the external IP address 10.200.1.10 and port 10443 to the internal IP address 10.0.1.10 and port 443 of the Webserver. The Deny policy denies traffic from the WAN (port1) interface to the LAN (port3) interface with the source address of Deny_IP and the destination address of All. In this scenario, the administrator wants to deny Webserver access for Remote-User2, who has the IP address 10.200.3.2, which is included in the Deny_IP address object. Remote-User1, who has the IP address 10.200.3.1, must be able to access the Webserver. To achieve this goal, the administrator can make two changes to deny Webserver access for Remote-User2:

- > Set the Destination address as Webserver in the Deny policy. This will make the Deny policy more specific and match only the traffic that is destined for the Webserver's internal IP address, instead of any destination address.
- > Enable match-vip in the Deny policy. This will make the Deny policy apply to traffic that matches a VIP object, instead of ignoring it. This way, the Deny policy will block Remote-User2's traffic that uses the VIP object's external IP address and port.

NEW QUESTION 72

Why does FortiGate Keep TCP sessions in the session table for several seconds, even after both sides (client and server) have terminated the session?

- A. To allow for out-of-order packets that could arrive after the FIN/ACK packets
- B. To finish any inspection operations
- C. To remove the NAT operation
- D. To generate logs

Answer: A

Explanation:

TCP provides the ability for one end of a connection to terminate its output while still receiving data from the other end. This is called a half-close. FortiGate unit implements a specific timer before removing an entry in the firewall session table.

NEW QUESTION 75

Which of the following SD-WAN load balancing method use interface weight value to distribute traffic? (Choose two.)

- A. Source IP
- B. Spillover
- C. Volume
- D. Session

Answer: CD

Explanation:

<https://docs.fortinet.com/document/fortigate/6.0.0/handbook/49719/configuring-sd-wan-load-balancing>

NEW QUESTION 78

Refer to the exhibits. Exhibit A shows the application sensor configuration. Exhibit B shows the Excessive-Bandwidth and Apple

filter details.

Exhibit A Exhibit B

Edit Application Sensor

Categories

- All Categories
- Business (179, 6)
- Collaboration (293, 6)
- Game (124)
- Mobile (3)
- P2P (85)
- Remote.Access (91)
- Storage.Backup (296, 16)
- Video/Audio (206, 13)
- Web.Client (18)
- Cloud.IT (31)
- Email (87, 12)
- General.Interest (241, 9)
- Network.Service (332)
- Proxy (106)
- Social.Media (150, 31)
- Update (48)
- VoIP (31)
- Unknown Applications

Network Protocol Enforcement

Application and Filter Overrides

[+ Create New](#) [Edit](#) [Delete](#)

Priority	Details	Type	Action
1	BHVR Excessive-Bandwidth	Filter	Block
2	VEND Apple	Filter	Monitor

Exhibit A Exhibit B

Edit Override

Type: Application **Filter**

Action: **Block**

Filter: **BHVR** Excessive-Bandwidth

FaceTime

Name	Category	Technology
Application Signature	1/1262	
FaceTime	VoIP	Client-Server

Edit Override

Type: Application **Filter**

Action: **Monitor**

Filter: **VEND** Apple

FaceTime

Name	Category	Technology
Application Signature	1/33	
FaceTime	VoIP	Client-Server

Based on the configuration, what will happen to Apple FaceTime if there are only a few calls originating or incoming?

- A. Apple FaceTime will be allowed, based on the Categories configuration.
- B. Apple FaceTime will be blocked, based on the Excessive-Bandwidth filter configuration.
- C. Apple FaceTime will be allowed, based on the Apple filter configuration.
- D. Apple FaceTime will be allowed only if the Apple filter in Application and Filter Overrides is set to Allow.

Answer: B

Explanation:

FortiGate Security 7.2 Study Guide (p.310): "Then, FortiGate scans packets for matches, in this order, for the application control profile: 1. Application and filter overrides: If you have configured any application overrides or filter overrides, the application control profile considers those first. It looks for a matching override starting at the top of the list, like firewall policies. 2. Categories: Finally, the application control profile applies the action that you've configured for applications in your selected categories."

NEW QUESTION 79

Which three security features require the intrusion prevention system (IPS) engine to function? (Choose three.)

- A. Web filter in flow-based inspection
- B. Antivirus in flow-based inspection
- C. DNS filter
- D. Web application firewall
- E. Application control

Answer: ABE

Explanation:

<https://docs.fortinet.com/document/fortigate/7.0.0/new-features/739623/dns-filter-handled-by-ips-engine-in-flow>

NEW QUESTION 81

What is the limitation of using a URL list and application control on the same firewall policy, in NGFW policy-based mode?

- A. It limits the scanning of application traffic to the DNS protocol only.
- B. It limits the scanning of application traffic to use parent signatures only.
- C. It limits the scanning of application traffic to the browser-based technology category only.
- D. It limits the scanning of application traffic to the application category only.

Answer: C

Explanation:

FortiGate Security 7.2 Study Guide (p.317): "You can configure the URL Category within the same security policy; however, adding a URL filter causes application control to scan applications in only the browser-based technology category, for example, Facebook Messenger on the Facebook website."

NEW QUESTION 86

Which two statements are correct regarding FortiGate HA cluster virtual IP addresses? (Choose two.)

- A. Heartbeat interfaces have virtual IP addresses that are manually assigned.
- B. A change in the virtual IP address happens when a FortiGate device joins or leaves the cluster.
- C. Virtual IP addresses are used to distinguish between cluster members.
- D. The primary device in the cluster is always assigned IP address 169.254.0.1.

Answer: BD

NEW QUESTION 88

Refer to the exhibit.

The screenshot shows the configuration for a performance SLA named 'SLA1'. The 'Protocol' section has 'Ping', 'HTTP', and 'DNS' selected. The 'Server' section lists two IP addresses: '4.2.2.2' and '4.2.2.1'. The 'Participants' section is set to 'All SD-WAN Members' with a 'Specify' button, and lists 'port1' and 'port2'. At the bottom, the 'Enable probe packets' toggle is turned off.

An administrator has configured a performance SLA on FortiGate, which failed to generate any traffic. Why is FortiGate not sending probes to 4.2.2.2 and 4.2.2.1 servers? (Choose two.)

- A. The Detection Mode setting is not set to Passive.
- B. Administrator didn't configure a gateway for the SD-WAN members, or configured gateway is not valid.
- C. The configured participants are not SD-WAN members.
- D. The Enable probe packets setting is not enabled.

Answer: BD

NEW QUESTION 92

An administrator is configuring an Ipsec between site A and siteB. The Remotes Gateway setting in both sites has been configured as Static IP Address. For site A, the local quick mode selector is 192. 16. 1.0/24 and the remote quick mode selector is 192. 16.2.0/24. How must the administrator configure the local quick mode selector for site B?

- A. 192. 168.3.0/24
- B. 192. 168.2.0/24
- C. 192. 168. 1.0/24
- D. 192. 168.0.0/8

Answer: B

NEW QUESTION 96

Which statements best describe auto discovery VPN (ADVPN). (Choose two.)

- A. It requires the use of dynamic routing protocols so that spokes can learn the routes to other spokes.
- B. ADVPN is only supported with IKEv2.
- C. Tunnels are negotiated dynamically between spokes.
- D. Every spoke requires a static tunnel to be configured to other spokes so that phase 1 and phase 2 proposals are defined in advance.

Answer: AC

NEW QUESTION 99

Which two types of traffic are managed only by the management VDOM? (Choose two.)

- A. FortiGuard web filter queries
- B. PKI
- C. Traffic shaping
- D. DNS

Answer: AD

NEW QUESTION 101

On FortiGate, which type of logs record information about traffic directly to and from the FortiGate management IP addresses?

- A. System event logs
- B. Forward traffic logs
- C. Local traffic logs
- D. Security logs

Answer: C

NEW QUESTION 105

Which timeout setting can be responsible for deleting SSL VPN associated sessions?

- A. SSL VPN idle-timeout
- B. SSL VPN http-request-body-timeout
- C. SSL VPN login-timeout
- D. SSL VPN dtls-hello-timeout

Answer: A

NEW QUESTION 108

The HTTP inspection process in web filtering follows a specific order when multiple features are enabled in the web filter profile. What order must FortiGate use when the web filter profile has features enabled, such as safe search?

- A. DNS-based web filter and proxy-based web filter
- B. Static URL filter, FortiGuard category filter, and advanced filters
- C. Static domain filter, SSL inspection filter, and external connectors filters
- D. FortiGuard category filter and rating filter

Answer: B

Explanation:

FortiGate Security 7.2 Study Guide (p.285): "Remember that the web filtering profile has several features. So, if you have enabled many of them, the inspection order flows as follows: 1. The local static URL filter 2. FortiGuard category filtering (to determine a rating) 3. Advanced filters (such as safe search or removing Active X components)"

NEW QUESTION 112

Which two statements are true about the FGCP protocol? (Choose two.)

- A. FGCP elects the primary FortiGate device.
- B. FGCP is not used when FortiGate is in transparent mode.
- C. FGCP runs only over the heartbeat links.
- D. FGCP is used to discover FortiGate devices in different HA groups.

Answer: AC

Explanation:

The FGCP (FortiGate Clustering Protocol) is a protocol that is used to manage high availability (HA) clusters of FortiGate devices. It performs several functions, including the following:

FGCP elects the primary FortiGate device: In an HA cluster, FGCP is used to determine which FortiGate device will be the primary device, responsible for handling traffic and making decisions about what to allow or block. FGCP uses a variety of factors, such as the device's priority, to determine which device should be the primary.

FGCP runs only over the heartbeat links: FGCP communicates between FortiGate devices in the HA cluster using the heartbeat links. These are dedicated links that are used to exchange status and control information between the devices. FGCP does not run over other types of links, such as data links.

NEW QUESTION 116

When a firewall policy is created, which attribute is added to the policy to support recording logs to a FortiAnalyzer or a FortiManager and improves functionality when a FortiGate is integrated with these devices?

- A. Log ID
- B. Universally Unique Identifier
- C. Policy ID
- D. Sequence ID

Answer: B

Explanation:

FortiGate Security 7.2 Study Guide (p.67): "When creating firewall objects or policies, a universally unique identifier (UUID) attribute is added so that logs can record these UUIDs and improve functionality when integrating with FortiManager or FortiAnalyzer."

NEW QUESTION 117

What are two features of collector agent advanced mode? (Choose two.)

- A. In advanced mode, FortiGate can be configured as an LDAP client and group filters can be configured on FortiGate.
- B. In advanced mode, security profiles can be applied only to user groups, not individual users.
- C. Advanced mode uses the Windows convention—NetBios: Domain\Username.
- D. Advanced mode supports nested or inherited groups.

Answer: AD

Explanation:

* A. In advanced mode, FortiGate can be configured as an LDAP client and group filters can be configured on FortiGate.

This is true because advanced mode allows FortiGate to query the LDAP server directly for user information and group membership, without relying on the collector agent. This enables FortiGate to apply security policies based on LDAP group filters, which can be configured on FortiGate1

* D. Advanced mode supports nested or inherited groups.


This is true because advanced mode can handle complex group structures, such as nested groups or inherited groups, where a user belongs to a group that is a member of another group. This allows FortiGate to apply security policies based on the effective group membership of a user, not just the direct group membership1

FortiGate Infrastructure 7.2 Study Guide (p.146): "Also, advanced mode supports nested or inherited groups; that is, users can be members of subgroups that belong to monitored parent groups." "In advanced mode, you can configure FortiGate as an LDAP client and configure the group filters on FortiGate. You can also configure group filters on the collector agent."

NEW QUESTION 118

Refer to exhibit.

An administrator configured the web filtering profile shown in the exhibit to block access to all social networking sites except Twitter. However, when users try to access twitter.com, they are redirected to a FortiGuard web filtering block page.

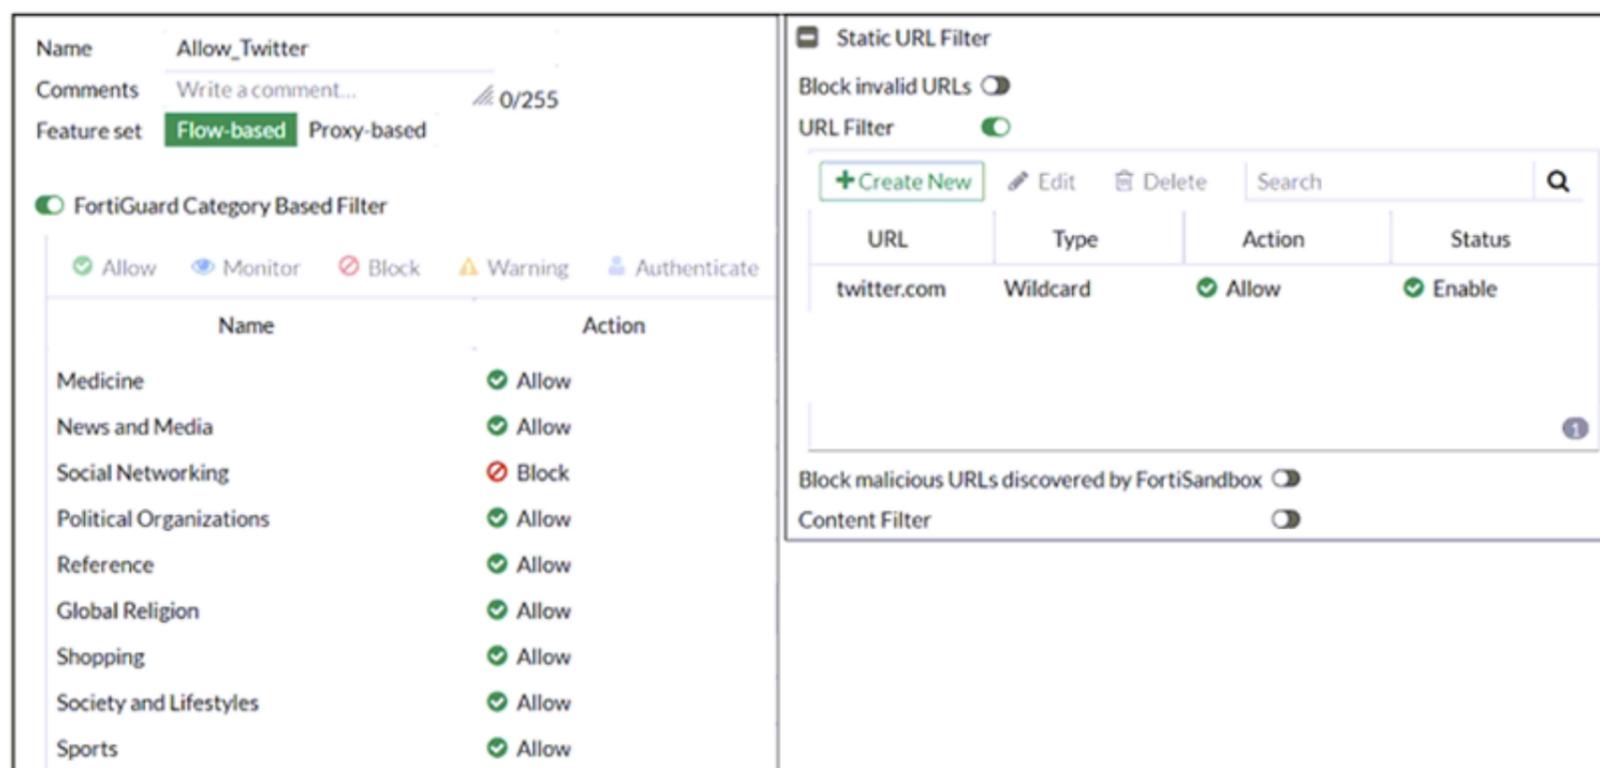

Based on the exhibit, which configuration change can the administrator make to allow Twitter while blocking all other social networking sites?

- A. On the FortiGuard Category Based Filter configuration, set Action to Warning for Social Networking
- B. On the Static URL Filter configuration, set Type to Simple
- C. On the Static URL Filter configuration, set Action to Exempt.
- D. On the Static URL Filter configuration, set Action to Monitor.

Answer: C

NEW QUESTION 121

By default, FortiGate is configured to use HTTPS when performing live web filtering with FortiGuard servers. Which CLI command will cause FortiGate to use an unreliable protocol to communicate with FortiGuard servers for live web filtering?

- A. set fortiguard-anycast disable
- B. set webfilter-force-off disable
- C. set webfilter-cache disable
- D. set protocol tcp

Answer: A

Explanation:

By default, "fortiguard-anycast" is enabled, and this setting only works with "set protocol https". To use udp (ie. "set protocol udp"), "fortiguard-anycast" must be disabled.

NEW QUESTION 125

Which feature in the Security Fabric takes one or more actions based on event triggers?

- A. Fabric Connectors
- B. Automation Stitches
- C. Security Rating
- D. Logical Topology

Answer: B

NEW QUESTION 126

Which statement describes a characteristic of automation stitches?

- A. They can have one or more triggers.
- B. They can be run only on devices in the Security Fabric.
- C. They can run multiple actions simultaneously.
- D. They can be created on any device in the fabric.


Answer: C

Explanation:

<https://docs.fortinet.com/document/fortigate/6.2.0/cookbook/351998/creating-automation-stitches>

NEW QUESTION 128

View the exhibit.

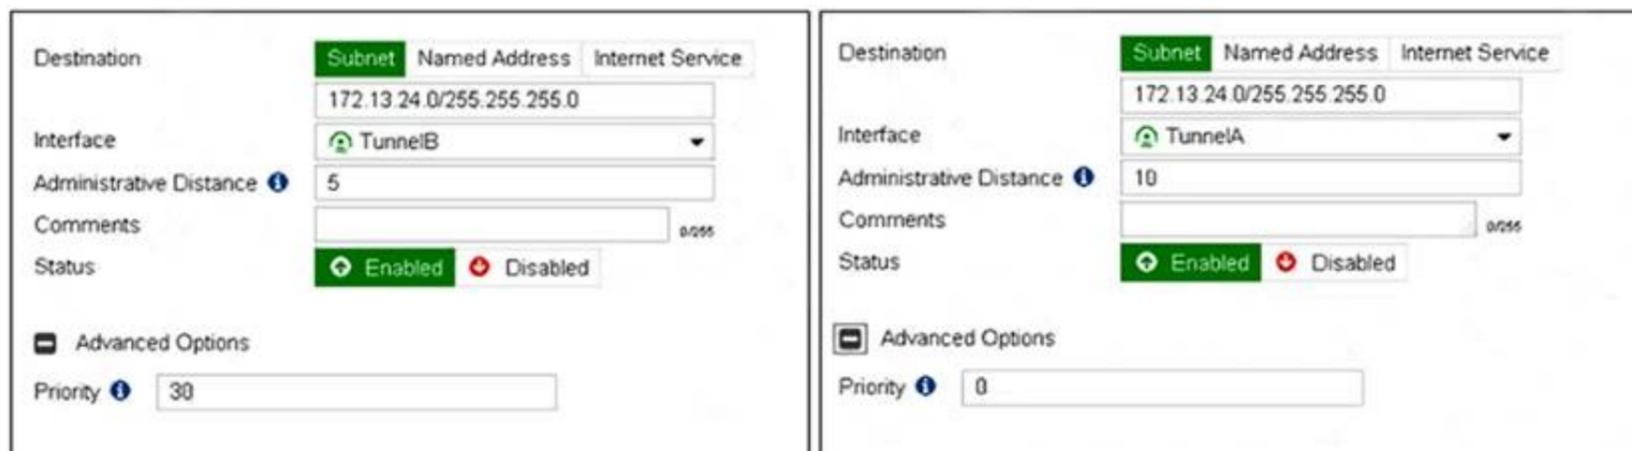

Which of the following statements are correct? (Choose two.)

- A. This setup requires at least two firewall policies with the action set to IPsec.
- B. Dead peer detection must be disabled to support this type of IPsec setup.
- C. The TunnelB route is the primary route for reaching the remote site.
- D. The TunnelA route is used only if the TunnelB VPN is down.
- E. This is a redundant IPsec setup.

Answer: CD

Explanation:

<https://docs.fortinet.com/document/fortigate/6.2.4/cookbook/632796/ospf-with-ipsec-vpn-for-network-redundan>

NEW QUESTION 132

How does FortiGate act when using SSL VPN in web mode?

- A. FortiGate acts as an FDS server.
- B. FortiGate acts as an HTTP reverse proxy.
- C. FortiGate acts as DNS server.
- D. FortiGate acts as router.

Answer: B

NEW QUESTION 136

Which two statements are true about the RPF check? (Choose two.)


- A. The RPF check is run on the first sent packet of any new session.

- B. The RPF check is run on the first reply packet of any new session.
- C. The RPF check is run on the first sent and reply packet of any new session.
- D. RPF is a mechanism that protects FortiGate and your network from IP spoofing attacks.

Answer: AD

NEW QUESTION 139

Refer to the exhibit.

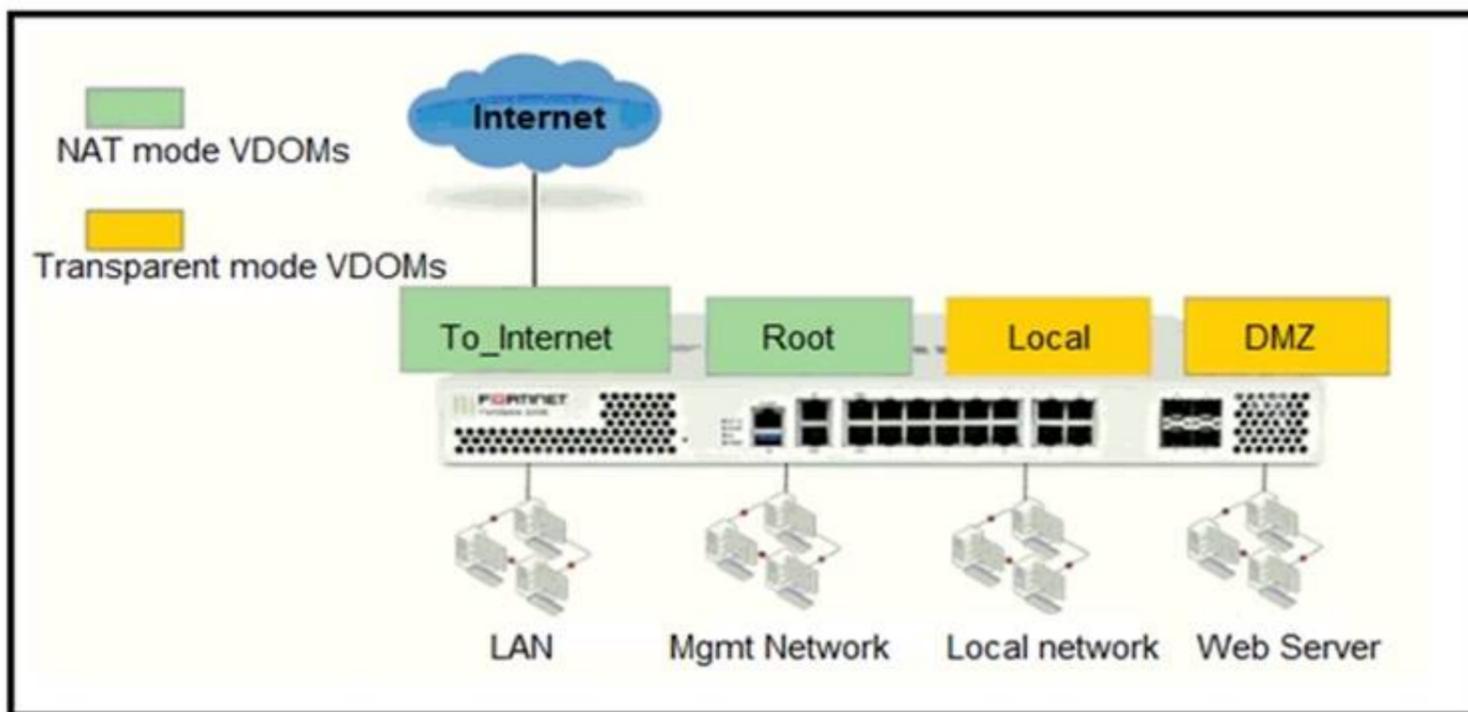

The Root and To_Internet VDOMs are configured in NAT mode. The DMZ and Local VDOMs are configured in transparent mode. The Root VDOM is the management VDOM. The To_Internet VDOM allows LAN users to access the internet. The To_Internet VDOM is the only VDOM with internet access and is directly connected to ISP modem . With this configuration, which statement is true?

- A. Inter-VDOM links are required to allow traffic between the Local and Root VDOMs.
- B. A static route is required on the To_Internet VDOM to allow LAN users to access the internet.
- C. Inter-VDOM links are required to allow traffic between the Local and DMZ VDOMs.
- D. Inter-VDOM links are not required between the Root and To_Internet VDOMs because the Root VDOM is used only as a management VDOM.

Answer: A

NEW QUESTION 143

Examine the exhibit, which contains a virtual IP and firewall policy configuration.

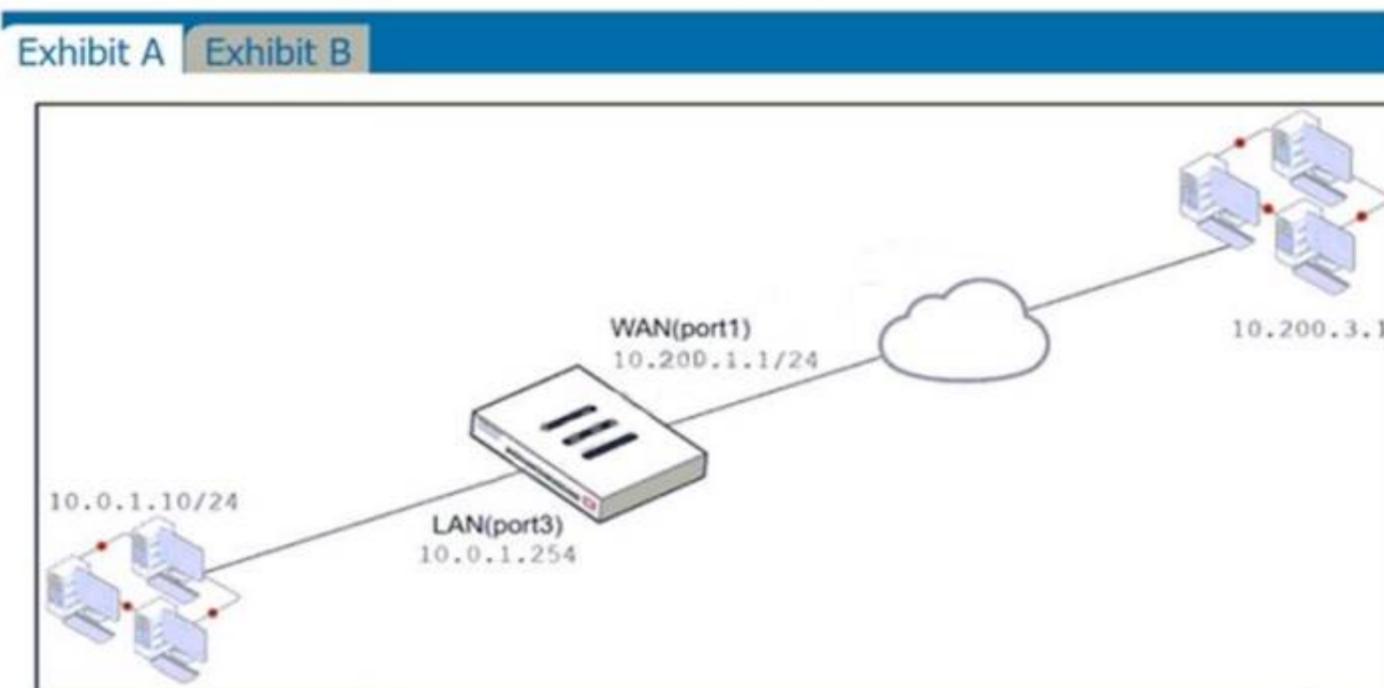


Exhibit A Exhibit B

Name	From	To	Source	Destination	Schedule	Service	Action	NAT
WebServer	WAN (port1)	LAN (port3)	all	VIP	always	ALL	ACCEPT	Enabled

Edit Virtual IP

VIP type: IPv4
 Name: VIP
 Comments: Write a comment... 0/255
 Color: Change

Network

Interface: WAN (port1)
 Type: Static NAT
 External IP address/range: 10.200.1.10
 Map to
 IPv4 address/range: 10.0.1.10

Optional Filters

Port Forwarding

Protocol: TCP UDP SCTP ICMP
 Port Mapping Type: One to one Many to many
 External service port: 10443
 Map to IPv4 port: 443

The WAN (port1) interface has the IP address 10.200. 1. 1/24. The LAN (port2) interface has the IP address 10.0. 1.254/24. The first firewall policy has NAT enabled on the outgoing interface address. The second firewall policy is configured with a VIP as the destination address. Which IP address will be used to source NAT the Internet traffic coming from a workstation with the IP address 10.0. 1. 10/24?

- A. 10.200. 1. 10
- B. Any available IP address in the WAN (port1) subnet 10.200. 1.0/24 66 of 108
- C. 10.200. 1. 1
- D. 10.0. 1.254

Answer: A

Explanation:

<https://help.fortinet.com/fos50hlp/54/Content/FortiOS/fortigate-firewall-52/Firewall%20Objects/Virtual%20IPs>.

NEW QUESTION 144

What is the effect of enabling auto-negotiate on the phase 2 configuration of an IPsec tunnel?

- A. FortiGate automatically negotiates different local and remote addresses with the remote peer.
- B. FortiGate automatically negotiates a new security association after the existing security association expires.
- C. FortiGate automatically negotiates different encryption and authentication algorithms with the remote peer.
- D. FortiGate automatically brings up the IPsec tunnel and keeps it up, regardless of activity on the IPsec tunnel.

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=12069>

FortiGate Infrastructure 7.2 Study Guide (p.264): "...then FortiGate might drop interesting traffic because of the absence of active SAs. To prevent this, you can enable Auto-negotiate. When you do this, FortiGate not only negotiates new SAs before the current SAs expire, but it also starts using the new SAs right away." "Another benefit of enabling Auto-negotiate is that the tunnel comes up and stays up automatically, even when there is no interesting traffic. When you enable Autokey Keep Alive and keep Auto-negotiate disabled, the tunnel does not come up automatically unless there is interesting traffic. However, after the tunnel is up, it stays that way because FortiGate periodically sends keep alive packets over the tunnel. Note that when you enable Auto-negotiate, Autokey Keep Alive is implicitly enabled."

NEW QUESTION 145

A team manager has decided that, while some members of the team need access to a particular website, the majority of the team does not. Which configuration option is the most effective way to support this request?

- A. Implement a web filter category override for the specified website
- B. Implement a DNS filter for the specified website.
- C. Implement web filter quotas for the specified website
- D. Implement web filter authentication for the specified website.

Answer: D

NEW QUESTION 150

Which two statements are correct about a software switch on FortiGate? (Choose two.)

- A. It can be configured only when FortiGate is operating in NAT mode
- B. Can act as a Layer 2 switch as well as a Layer 3 router
- C. All interfaces in the software switch share the same IP address
- D. It can group only physical interfaces

Answer: AC

NEW QUESTION 152

An administrator needs to increase network bandwidth and provide redundancy. What interface type must the administrator select to bind multiple FortiGate interfaces?

- A. VLAN interface
- B. Software Switch interface
- C. Aggregate interface
- D. Redundant interface

Answer: C

Explanation:

An aggregate interface is a logical interface that combines two or more physical interfaces into one virtual interface. An aggregate interface can increase network bandwidth and provide redundancy by distributing traffic across multiple physical interfaces using a load balancing algorithm. An aggregate interface can also support link aggregation control protocol (LACP) to negotiate the link aggregation settings with the connected device.

NEW QUESTION 157

Why does FortiGate keep TCP sessions in the session table for some seconds even after both sides (client and server) have terminated the session?

- A. To remove the NAT operation.
- B. To generate logs
- C. To finish any inspection operations.
- D. To allow for out-of-order packets that could arrive after the FIN/ACK packets.

Answer: D

NEW QUESTION 158

Refer to the exhibits.



The screenshot shows the 'Edit Policy' configuration for a policy named 'Facebook Access'. The configuration is as follows:

- Name:** Facebook Access
- Incoming interface:** port2
- Outgoing interface:** port1
- Source:** all
- Destination:** all
- Schedule:** always
- Service:** AppDefault (with a 'Specify' button)
- Application:** Facebook, Facebook_Like.Button (locked), Facebook_Video.Play
- URL Category:** (empty list with a '+' button)
- Action:** ACCEPT (checked), DENY
- Firewall/Network Options:** (empty)
- Protocol Options:** default

The exhibits show the SSL and authentication policy (Exhibit A) and the security policy (Exhibit B) for Facebook .

Users are given access to the Facebook web application. They can play video content hosted on Facebook but they are unable to leave reactions on videos or other types of posts.

Which part of the policy configuration must you change to resolve the issue?

- A. Make SSL inspection needs to be a deep content inspection.
- B. Force access to Facebook using the HTTP service.
- C. Get the additional application signatures are required to add to the security policy.
- D. Add Facebook in the URL category in the security policy.

Answer: A

Explanation:

They can play video (tick) content hosted on Facebook, but they are unable to leave reactions on videos or other types of posts. This indicate that the rule are partially working as they can watch video but cant react, i.e. liking the content. So must be an issue with the SSL inspection rather than adding an app rule.

NEW QUESTION 161

FortiGate is configured as a policy-based next-generation firewall (NGFW) and is applying web filtering and application control directly on the security policy. Which two other security profiles can you apply to the security policy? (Choose two.)

- A. Antivirus scanning
- B. File filter
- C. DNS filter
- D. Intrusion prevention

Answer: AD

NEW QUESTION 163

In an explicit proxy setup, where is the authentication method and database configured?

- A. Proxy Policy
- B. Authentication Rule
- C. Firewall Policy
- D. Authentication scheme

Answer: D

NEW QUESTION 164

Which statement is correct regarding the security fabric?

- A. FortiManager is one of the required member devices.
- B. FortiGate devices must be operating in NAT mode.
- C. A minimum of two Fortinet devices is required.
- D. FortiGate Cloud cannot be used for logging purposes.


Answer: B

Explanation:

FortiGate Security 7.2 Study Guide (p.428): "You must have a minimum of two FortiGate devices at the core of the Security Fabric, plus one FortiAnalyzer or cloud logging solution. FortiAnalyzer Cloud or FortiGate Cloud can act as the cloud logging solution. The FortiGate devices must be running in NAT mode."

NEW QUESTION 168

Refer to the exhibit.

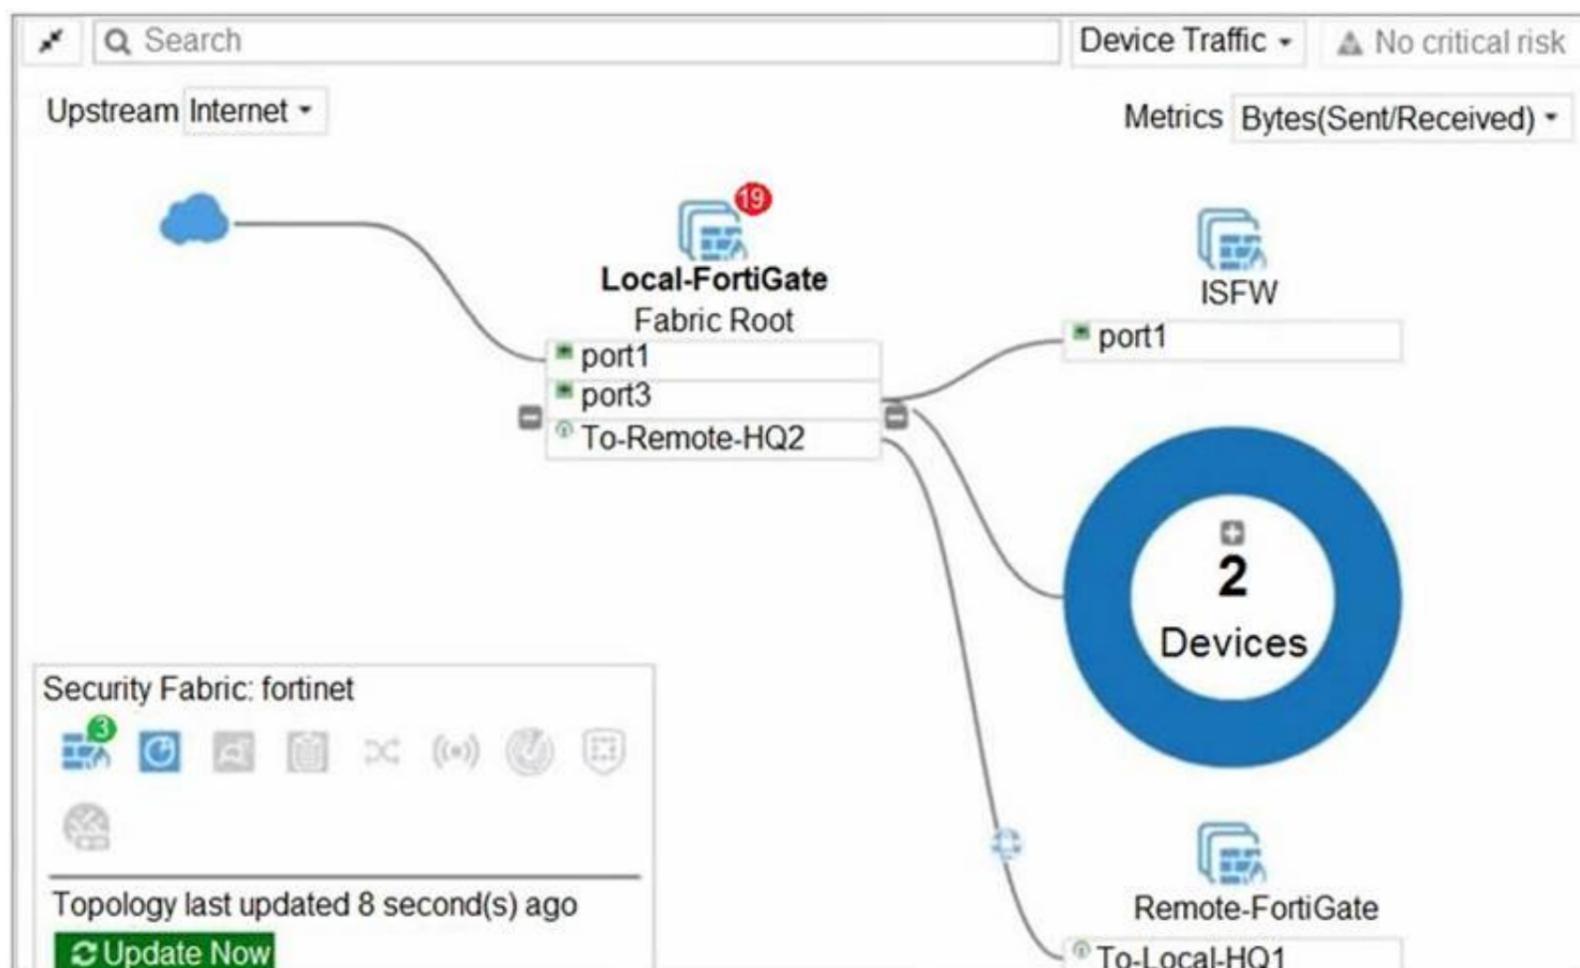

Given the security fabric topology shown in the exhibit, which two statements are true? (Choose two.)

- A. There are five devices that are part of the security fabric.
- B. Device detection is disabled on all FortiGate devices.
- C. This security fabric topology is a logical topology view.
- D. There are 19 security recommendations for the security fabric.

Answer: CD

Explanation:

References: <https://docs.fortinet.com/document/fortigate/5.6.0/cookbook/761085/results>
<https://docs.fortinet.com/document/fortimanager/6.2.0/new-features/736125/security-fabric-topology>

NEW QUESTION 171

Refer to the exhibit.

Username	Administrator	Change Password
Type	Local User	
	Match a user on a remote server group	
	Match all users in a remote server group	
	Use public key infrastructure (PKI) group	
Comments	Write a comment...	0/255
Administrator Profile	prof_admin	
Email Address	admin@xyz.com	
<input type="checkbox"/>	SMS	
<input type="checkbox"/>	Two-factor Authentication	
<input type="checkbox"/>	Restrict login to trusted hosts	
<input type="checkbox"/>	Restrict admin to guest account provisioning only	

The global settings on a FortiGate device must be changed to align with company security policies. What does the Administrator account need to access the FortiGate global settings?

- A. Change password
- B. Enable restrict access to trusted hosts
- C. Change Administrator profile
- D. Enable two-factor authentication

Answer: C

NEW QUESTION 176

Which certificate value can FortiGate use to determine the relationship between the issuer and the certificate?

- A. Subject Key Identifier value
- B. SMMIE Capabilities value
- C. Subject value
- D. Subject Alternative Name value

Answer: A

NEW QUESTION 179

Which of statement is true about SSL VPN web mode?

- A. The tunnel is up while the client is connected.
- B. It supports a limited number of protocols.
- C. The external network application sends data through the VPN.
- D. It assigns a virtual IP address to the client.

Answer: B

Explanation:

FortiGate_Security_6.4 page 575 - Web mode requires only a web browser, but supports a limited number of protocols.

NEW QUESTION 181

Refer to the exhibits.

Exhibit A shows a network diagram. Exhibit B shows the firewall policy configuration and a VIP object configuration.

The WAN (port1) interface has the IP address 10.200.1.1/24.

The LAN (port3) interface has the IP address 10.0.1.254/24.

The administrator disabled the WebServer firewall policy.

Exhibit A **Exhibit B**

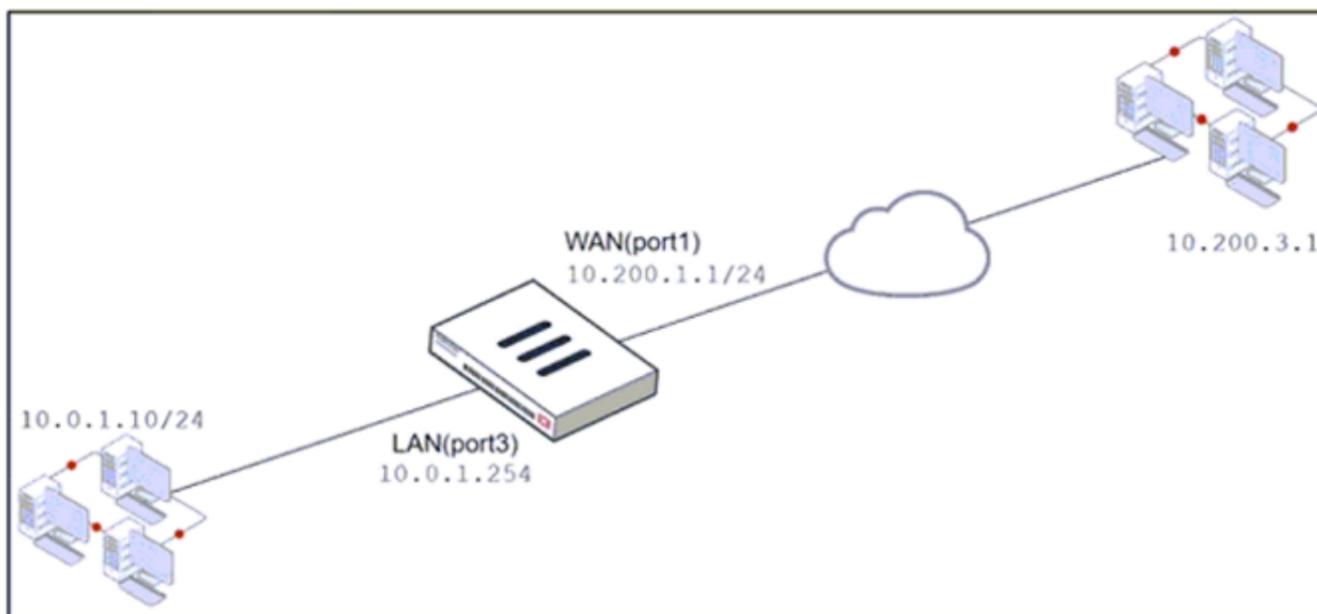


Exhibit A **Exhibit B**

Name	From	To	Source	Destination	Schedule	Service	Action	NAT
Full_Access	LAN (port3)	WAN (port1)	all	all	always	ALL	ACCEPT	Enabled
WebServer	WAN (port1)	LAN (port3)	all	VIP	always	ALL	ACCEPT	Disabled

Edit Virtual IP

VIP type: IPv4
 Name: VIP
 Comments: Write a comment... 0/255
 Color: Change

Network

Interface: WAN [port1]
 Type: Static NAT
 External IP address/range: 10.200.1.10
 Map to:
 IPv4 address/range: 10.0.1.10

Optional Filters
 Port Forwarding

Which IP address will be used to source NAT the traffic, if a user with address 10.0.1.10 connects over SSH to the host with address 10.200.3.1?

- A. 10.200.1.10
- B. 10.0.1.254
- C. 10.200.1.1
- D. 10.200.3.1

Answer: C

Explanation:

Traffic is coming from LAN to WAN, matches policy Full_Access which has NAT enable, so traffic uses source IP address of outgoing interface. Simple SNAT.

NEW QUESTION 183

Refer to the exhibit.

Exhibit A Exhibit B

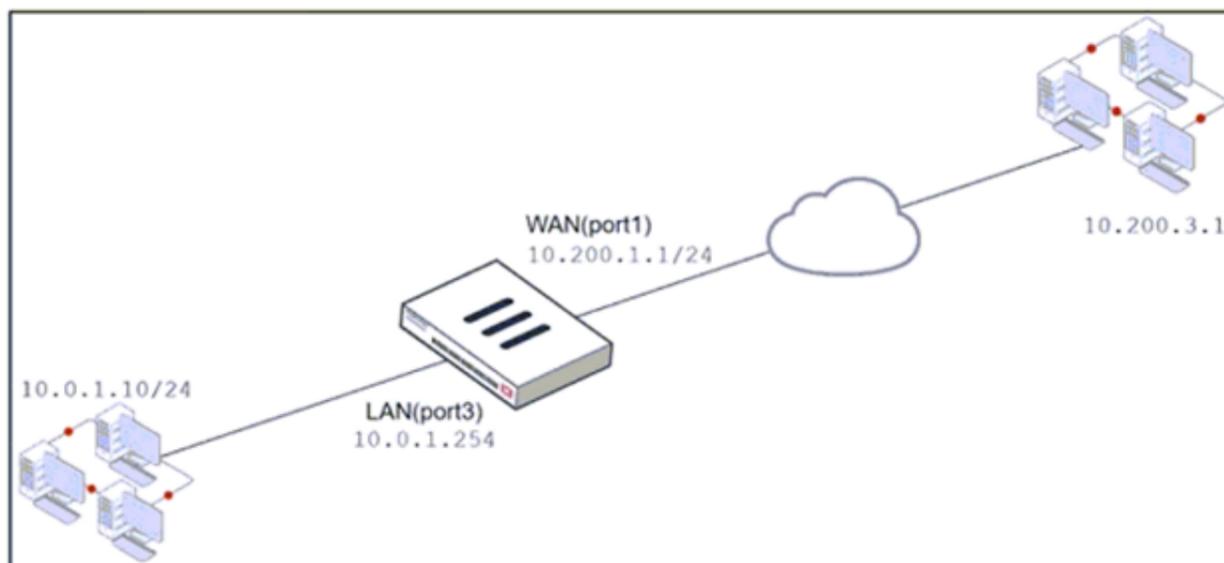


Exhibit A Exhibit B

Name	From	To	Source	Destination	Schedule	Service	Action	NAT
Full_Access	LAN (port3)	WAN (port1)	all	all	always	ALL	ACCEPT	IP Pool
WebServer	WAN (port1)	LAN (port3)	all	VIP	always	ALL	ACCEPT	Disabled

Edit Virtual IP

VIP type: IPv4
Name: VIP
Comments: Write a comment... 0/255
Color: Change

Network

Interface: port1
Type: Static NAT
External IP address/range: 10.200.1.10
Map to IPv4 address/range: 10.0.1.10

Optional Filters:

Port Forwarding:

Protocol: TCP | UDP | SCTP | ICMP
Port Mapping Type: One to one | Many to many
External service port: 443
Map to IPv4 port: 443

Edit Dynamic IP Pool

Name: IP Pool
Comments: Write a comment... 0/255
Type: Overload | One-to-One | Fixed Port Range | Port Block Allocation
External IP address/range: 10.200.1.100-10.200.1.100
NAT64:
ARP Reply:

The exhibit contains a network diagram, virtual IP, IP pool, and firewall policies configuration. The WAN (port1) interface has the IP address 10.200.1.1/24. The LAN (port3) interface has the IP address 10.0.1.254. The first firewall policy has NAT enabled using IP Pool. The second firewall policy is configured with a VIP as the destination address.

Which IP address will be used to source NAT the internet traffic coming from a workstation with the IP address 10.0.1.10?

- A. 10.200.1.1
- B. 10.200.3.1
- C. 10.200.1.100
- D. 10.200.1.10

Answer: C

Explanation:

Policy 1 is applied on outbound (LAN-WAN) and policy 2 is applied on inbound (WAN-LAN). question is asking SNAT for outbound traffic so policy 1 will take place and NAT overload is in effect.

NEW QUESTION 184

An administrator has a requirement to keep an application session from timing out on port 80. What two changes can the administrator make to resolve the issue without affecting any existing services running through FortiGate? (Choose two.)

- A. Create a new firewall policy with the new HTTP service and place it above the existing HTTP policy.
- B. Create a new service object for HTTP service and set the session TTL to never
- C. Set the TTL value to never under config system-ttl
- D. Set the session TTL on the HTTP policy to maximum

Answer: BC

NEW QUESTION 186

If the Issuer and Subject values are the same in a digital certificate, which type of entity was the certificate issued to?

- A. A CRL
- B. A person
- C. A subordinate CA
- D. A root CA

Answer: D

NEW QUESTION 190

Which statement about video filtering on FortiGate is true?

- A. Video filtering FortiGuard categories are based on web filter FortiGuard categories.
- B. It does not require a separate FortiGuard license.
- C. Full SSL inspection is not required.
- D. its available only on a proxy-based firewall policy.

Answer: D

Explanation:

FortiGate Security 7.2 Study Guide (p.279): "To apply the video filter profile, proxy-based firewall policies currently allow you to enable the video filter profile. You must enable full SSL inspection on the firewall policy."

<https://docs.fortinet.com/document/fortigate/7.2.4/administration-guide/860867/filtering-based-on-fortiguard-cat>

NEW QUESTION 192

Refer to the exhibit, which contains a session diagnostic output.

```
session info: proto=17 proto_state=01 duration=254 expire=179 timeout=0 flags=00000000 socktype=0 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ helper=dns-udp vlan_cos=0/255
state=log may_dirty f00 log-start
statistic(bytes/packets/allow_err): org=1420/22/1 reply=5678/22/1 tuples=2
tx speed(Bps/kbps): 5/0 rx speed(Bps/kbps): 22/0
origin->sink: org pre->post, reply pre->post dev=5->3/3->5 gwy=10.200.1.254/10.0.1.200
hook=post dir=org act=snat 10.0.1.200:2486->208.91.112.53:53(10.200.1.1:62902)
hook=pre dir=reply act=dnat 208.91.112.53:53->10.200.1.1:62902(10.0.1.200:2486)
misc=0 policy_id=3 auth_info=0 chk_client_info=0 vd=0
serial=0001fc1e tos=ff/ff app_list=0 app=0 url_cat=0
rpd_b_link_id= 00000000 rpd_b_svc_id=0 ngfwid=n/a
npu_state=0x040000
```

Which statement is true about the session diagnostic output?

- A. The session is a UDP unidirectional state.
- B. The session is in TCP ESTABLISHED state.
- C. The session is a bidirectional UDP connection.
- D. The session is a bidirectional TCP connection.

Answer: C

Explanation:

<https://kb.fortinet.com/kb/viewContent.do?externalId=FD30042>

NEW QUESTION 193

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your NSE4_FGT-7.2 Exam with Our Prep Materials Via below:

https://www.certleader.com/NSE4_FGT-7.2-dumps.html