



Fortinet

Exam Questions NSE5_FAZ-7.2

Fortinet NSE 5 - FortiAnalyzer 7.2

NEW QUESTION 1

Which SQL query is in the correct order to query the database in the FortiAnalyzer?

- A. SELECT devid FROM Slog GROOP BY devid WHERE * user' =* USERI'
- B. SELECT devid WHERE 'u3er'='USERI' FROM \$ log GROUP BY devid
- C. SELECT devid FROM Slog- WHERE *user' =' USERI' GROUP BY devid
- D. FROM Slog WHERE 'user* =' USERI' SELECT devid GROUP BY devid

Answer: C

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 259: The main clauses FortiAnalyzer reports use are as follows:

- FROM
- WHERE
- GROUP BY
- ORDER BY
- LIMIT
- OFFSET

Accordingly, following the SELECT keyword, the statement must be followed by one or more clauses in the order in which they appear in the table shown on this slide.

NEW QUESTION 2

What is the purpose of using prefilters when configuring event handlers?

- A. They limit which logs are checked for matches by the other filters.
- B. They can filter the logs before they are processed by FortiAnalyzer
- C. They download new filters to be used in event handlers.
- D. They are common filters applied simultaneously to all event handlers.

Answer: A

NEW QUESTION 3

Which statements are true regarding securing communications between FortiAnalyzer and FortiGate with SSL? (Choose two.)

- A. SSL is the default setting.
- B. SSL communications are auto-negotiated between the two devices.
- C. SSL can send logs in real-time only.
- D. SSL encryption levels are globally set on FortiAnalyzer.
- E. FortiAnalyzer encryption level must be equal to, or higher than, FortiGate.

Answer: AD

NEW QUESTION 4

What are two of the key features of FortiAnalyzer? (Choose two.)

- A. Centralized log repository
- B. Cloud-based management
- C. Reports
- D. Virtual domains (VDOMs)

Answer: AC

NEW QUESTION 5

Which statements are true of Administrative Domains (ADOMs) in FortiAnalyzer? (Choose two.)

- A. ADOMs are enabled by default.
- B. ADOMs constrain other administrator's access privileges to a subset of devices in the device list.
- C. Once enabled, the Device Manager, FortiView, Event Management, and Reports tab display per ADOM.
- D. All administrators can create ADOMs--not just the admin administrator.

Answer: BC

NEW QUESTION 6

What must you consider when using log fetching? (Choose two.)

- A. The fetch client can retrieve logs from devices that are not added to its local Device Manager
- B. You can use filters to include only logs from a single device.
- C. The fetching profile must include a user with the Super_User profile.
- D. The archive logs retrieved from the server become archive logs in the client.

Answer: BC

NEW QUESTION 7

What must you configure on FortiAnalyzer to upload a FortiAnalyzer report to a supported external server? (Choose two.)

- A. SFTP, FTP, or SCP server
- B. Mail server
- C. Output profile
- D. Report scheduling

Answer: AC

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.0.2/administration-guide/598322/creating-output-profiles>

NEW QUESTION 8

What are offline logs on FortiAnalyzer?

- A. Compressed logs, which are also known as archive logs, are considered to be offline logs.
- B. When you restart FortiAnalyzer
- C. all stored logs are considered to be offline logs.
- D. Logs that are indexed and stored in the SQL database.
- E. Logs that are collected from offline devices after they boot up.

Answer: A

NEW QUESTION 9


Which item must you configure on FortiAnalyzer to email generated reports automatically?

- A. Output profile
- B. Report scheduling
- C. SFTP server
- D. SNMP server

Answer: A

NEW QUESTION 10

Refer to the exhibit.

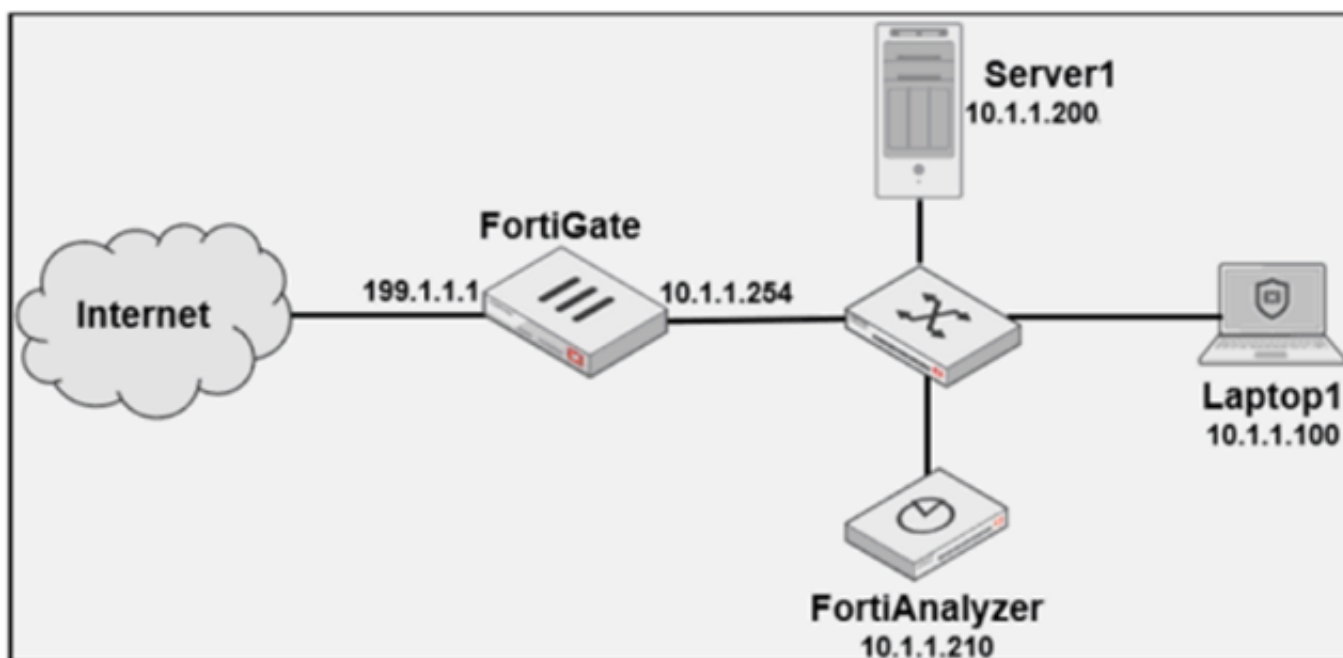

Laptop1 is used by several administrators to manage FortiAnalyzer. You want to configure a generic text filter that matches all login attempts to the web interface generated by any user other than "admin", and coming from Laptop1. Which filter will achieve the desired result?

- A. operation-login & dstip==10.1.1.210 & user!=admin
- B. operation-login & srcip==10.1.1.100 & dstip==10.1.1.210 & user==admin
- C. operation-login & performed_on=="GUI(10.1.1.210)" & user!=admin
- D. operation-login & performed_on=="GUI(10.1.1.100)" & user!=admin

Answer: D

NEW QUESTION 10

If a hard disk fails on a FortiAnalyzer that supports software RAID, what should you do to bring the FortiAnalyzer back to functioning normally, without losing data?

- A. Hot swap the disk
- B. Replace the disk and rebuild the RAID manually
- C. Take no action if the RAID level supports a failed disk
- D. Shut down FortiAnalyzer and replace the disk

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD46446#:~:text=On%20FortiAnalyzer%2FFortiMana> If a hard disk on a FortiAnalyzer unit fails, it must be replaced. On FortiAnalyzer devices that support hardware RAID, the hard disk can be replaced while the unit is still running – known as hot swapping. On FortiAnalyzer units with software RAID, the device must be shutdown prior to exchanging the hard disk.

NEW QUESTION 15

Which two statements are true regarding the outbreak detection service? (Choose two.)

- A. New alerts are received by email.
- B. Outbreak alerts are available on the root ADOM only.
- C. An additional license is required.
- D. It automatically downloads new event handlers and reports.

Answer: CD

NEW QUESTION 20

Which statement is true when you are upgrading the firmware on an HA cluster made up of two FortiAnalyzer devices?

- A. First, upgrade the secondary device, and then upgrade the primary device.
- B. Both FortiAnalyzer devices will be upgraded at the same time.
- C. You can enable uninterruptible-upgrade so that the normal FortiAnalyzer operations are not interrupted while the cluster firmware upgrades.
- D. You can perform the firmware upgrade using only a console connection.

Answer: A

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 64: To upgrade FortiAnalyzer HA cluster firmware:

- * 1. Log in to each secondary device.
- * 2. Upgrade the firmware of all secondary devices.
- * 3. Wait for the upgrades to complete and verify that all secondary devices joined the cluster.
- * 4. Verify that logs on all secondary devices are synchronized with the primary device.
- * 5. Upgrade the primary device.

<https://docs.fortinet.com/document/fortianalyzer/7.2.0/upgrade-guide/262607/upgrading-fortianalyzer-firmware>

NEW QUESTION 23

What happens when a log file saved on FortiAnalyzer disks reaches the size specified in the device log settings?

- A. The log file is stored as a raw log and is available for analytic support.
- B. The log file rolls over and is archived.
- C. The log file is purged from the database.
- D. The log file is overwritten.

Answer: B

NEW QUESTION 27

Which clause is considered mandatory in SELECT statements used by the FortiAnalyzer to generate reports?

- A. FROM
- B. LIMIT
- C. WHERE
- D. ORDER BY

Answer: A

NEW QUESTION 28

On FortiAnalyzer, what is a wildcard administrator account?

- A. An account that permits access to members of an LDAP group
- B. An account that allows guest access with read-only privileges
- C. An account that requires two-factor authentication
- D. An account that validates against any user account on a FortiAuthenticator

Answer: A

Explanation:

<https://docs.fortinet.com/document/fortigate/6.2.0/cookbook/747268/configuring-wildcard-admin-accounts>

NEW QUESTION 30

Which two actions should an administrator take to view Compromised Hosts on FortiAnalyzer? (Choose two.)

- A. Enable web filtering in firewall policies on FortiGate devices, and make sure these logs are sent to FortiAnalyzer.
- B. Make sure all endpoints are reachable by FortiAnalyzer.
- C. Enable device detection on an interface on the FortiGate devices that are connected to the FortiAnalyzer device.
- D. Subscribe FortiAnalyzer to FortiGuard to keep its local threat database up to date.

Answer: AD

Explanation:

In order to configure IOC, you require the following:

- A one-year subscription to IOC. Note that FortiAnalyzer does include an evaluation license, but it is restrictive and only meant to give you an idea of how the feature works.

- A web filter services subscription on FortiGate device(s)
 - Web filter policies on FortiGate device(s) that send traffic to FortiAnalyzer Compromised Hosts or Indicators of Compromise service (IOC) is a licensed feature. To view Compromised Hosts, you must turn on the UTM web filter of FortiGate devices and subscribe your FortiAnalyzer unit to FortiGuard to keep its local threat database synchronized with the FortiGuard threat database. See Subscribing FortiAnalyzer to FortiGuard.
- Ref :
<https://docs.fortinet.com/document/fortianalyzer/6.4.0/administration-guide/137635/viewing-compromised-host>

NEW QUESTION 33

What can you do on FortiAnalyzer to restrict administrative access from specific locations?

- A. Configure trusted hosts for that administrator.
- B. Enable geo-location services on accessible interface.
- C. Configure two-factor authentication with a remote RADIUS server.
- D. Configure an ADOM for respective location.

Answer: A

NEW QUESTION 36

What is the purpose of a dataset query in FortiAnalyzer?

- A. It sorts log data into tables
- B. It extracts the database schema
- C. It retrieves log data from the database
- D. It injects log data into the database

Answer: C

NEW QUESTION 37

Logs are being deleted from one of the ADOMs earlier than the configured setting for archiving in the data policy. What is the most likely problem?

- A. CPU resources are too high
- B. Logs in that ADOM are being forwarded, in real-time, to another FortiAnalyzer device
- C. The total disk space is insufficient and you need to add other disk
- D. The ADOM disk quota is set too low, based on log rates

Answer: D

NEW QUESTION 42


What is the purpose of a predefined template on the FortiAnalyzer?

- A. It can be edited and modified as required
- B. It specifies the report layout which contains predefined texts, charts, and macros
- C. It specifies report settings which contains time period, device selection, and schedule
- D. It contains predefined data to generate mock reports

Answer: B

NEW QUESTION 46

Refer to the exhibit.

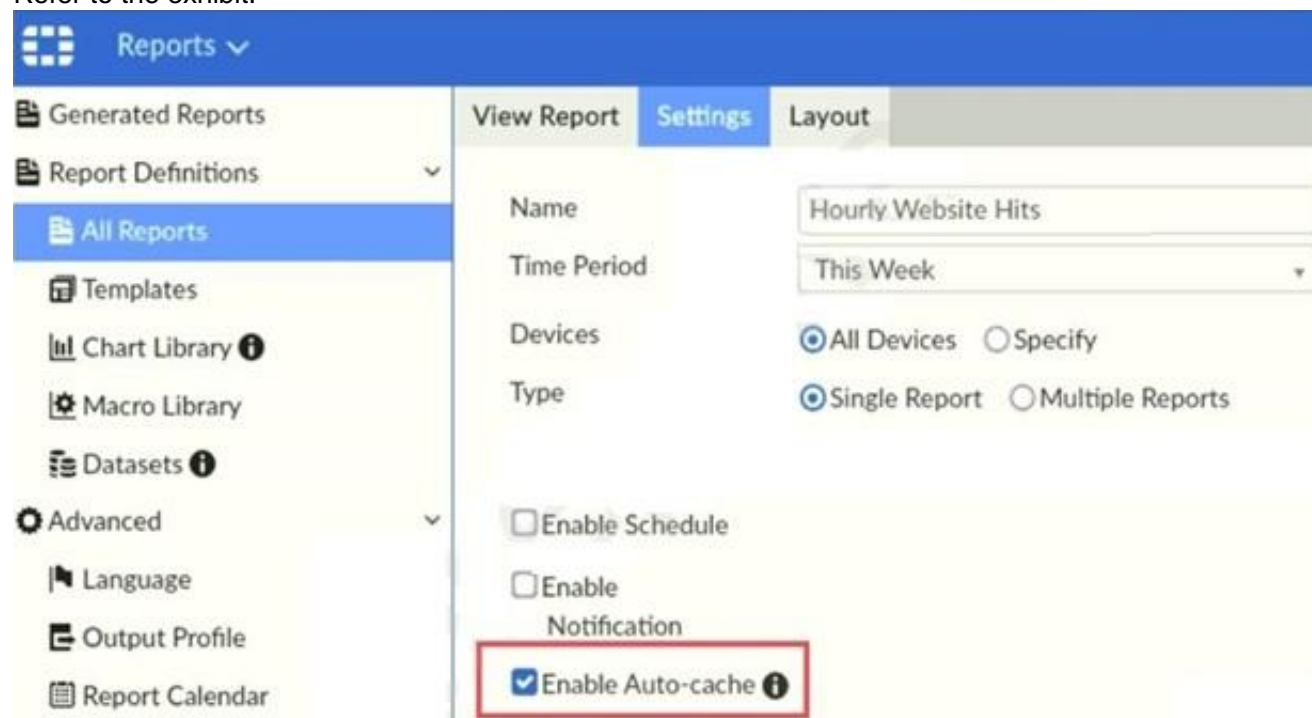

Which two statements are true regarding enabling auto-cache on FortiAnalyzer? (Choose two.)

- A. Report size will be optimized to conserve disk space on FortiAnalyzer.
- B. Reports will be cached in the memory.
- C. This feature is automatically enabled for scheduled reports.
- D. Enabling auto-cache reduces report generation time for reports that require a long time to assemble datasets.

Answer: CD

Explanation:

"Enable auto-cache in the report settings to boost the reporting performance and reduce report generation time. Scheduled reports have auto-cache enabled already."

FortiAnalyzer_7.0_Study_Guide-Online page 306

NEW QUESTION 47

Which two settings must you configure on FortiAnalyzer to allow non-local administrators to authenticate to FortiAnalyzer with any user account in a single LDAP group? (Choose two.)

- A. A local wildcard administrator account
- B. A remote LDAP server
- C. A trusted host profile that restricts access to the LDAP group
- D. An administrator group

Answer: AB

NEW QUESTION 52

What is the main purpose of using an NTP server on FortiAnalyzer and all of its registered devices?

- A. Log correlation
- B. Host name resolution
- C. Log collection
- D. Real-time forwarding

Answer: A

NEW QUESTION 55

Which two statements are true regarding fabric connectors? (Choose two.)

- A. Configuring fabric connectors to send notification to ITSM platform upon incident creation is more efficient than third-party information from the FortiAnalyzer API.
- B. Fabric connectors allow to save storage costs and improve redundancy.
- C. Storage connector service does not require a separate license to send logs to cloud platform.
- D. Cloud-Out connections allow you to send real-time logs to public cloud accounts like Amazon S3, Azure Blob , and Google Cloud.

Answer: AD

NEW QUESTION 60

Which two elements are contained in a system backup created on FortiAnalyzer? (Choose two.)

- A. System information
- B. Logs from registered devices
- C. Report information
- D. Database snapshot

Answer: AC

Explanation:

What does the System Configuration backup include?

System information, such as the device IP address and administrative user information. Device list, such as any devices you configured to allow log access.

Report information, such as any configured report settings, as well as all your custom report details. These are not the actual reports.

FortiAnalyzer_7.0_Study_Guide-Online pag. 29

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 29: What does the System Configuration backup include?

- System information, such as the device IP address and administrative user information
- Device list, such as any devices you configured to allow log access
- Report information, such as any configured report settings, as well as all your custom report details. These are not the actual reports.

NEW QUESTION 62

How do you restrict an administrator's access to a subset of your organization's ADOMs?

- A. Set the ADOM mode to Advanced
- B. Assign the ADOMs to the administrator's account
- C. Configure trusted hosts
- D. Assign the default Super_User administrator profile

Answer: B

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/717578/assigning-administrators-to>

NEW QUESTION 64

You created a playbook on FortiAnalyzer that uses a FortiOS connector

When configuring the FortiGate side, which type of trigger must be used so that the actions in an automation stitch are available in the FortiOS connector?

- A. FortiAnalyzer Event Handler
- B. Incoming webhook
- C. FortiOS Event Log
- D. Fabric Connector event

Answer: B

Explanation:

"One possible scenario is shown on the slide:

- * 1. Traffic flows through the FortiGate
- * 2. FortiGate sends logs to FortiAnalyzer
- * 3. FortiAnalyzer detects some suspicious traffic and generates an event
- * 4. The event triggers the execution of a playbook in FortiAnalyzer, which sends a webhook call to FortiGate so that it runs an automation stitch
- * 5. FortiGate runs the automation stitch with the corrective or preventive actions" FortiAnalyzer_7.0_Study_Guide-Online page 228

In order to see the actions related to the FOS connector, you must enable an automation rule using the Incoming Webhook Call trigger on the FortiGate side.
FortiAnalyzer_7.0_Study Guide page no 233

NEW QUESTION 66

How are logs forwarded when FortiAnalyzer is using aggregation mode?

- A. Logs are forwarded as they are received and content files are uploaded at a scheduled time.
- B. Logs and content files are stored and uploaded at a scheduled time.
- C. Logs are forwarded as they are received.
- D. Logs and content files are forwarded as they are received.

Answer: B

Explanation:

<https://www.fortinetguru.com/2020/07/log-forwarding-fortianalyzer-fortios-6-2-3/> <https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/420493/modes>

NEW QUESTION 70

Which two methods can you use to send event notifications when an event occurs that matches a configured event handler? (Choose two.)

- A. SMS
- B. Email
- C. SNMP
- D. IM

Answer: BC

NEW QUESTION 72

Which daemon is responsible for enforcing the log file size?

- A. sqlplugind
- B. logfiled
- C. miglogd
- D. ofrpd

Answer: B

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 121: The logfiled process enforces the log file size and is also responsible for disk quota enforcement by monitoring the other processes.

NEW QUESTION 74

An administrator has configured the following settings: config system fortiview settings
set resolve-ip enable end
What is the significance of executing this command?

- A. Use this command only if the source IP addresses are not resolved on FortiGate.
- B. It resolves the source and destination IP addresses to a hostname in FortiView on FortiAnalyzer.
- C. You must configure local DNS servers on FortiGate for this command to resolve IP addresses on Forti Analyzer.
- D. It resolves the destination IP address to a hostname in FortiView on FortiAnalyzer.

Answer: D

NEW QUESTION 75


What statements are true regarding disk log quota? (Choose two)

- A. The FortiAnalyzer stops logging once the disk log quota is met.
- B. The FortiAnalyzer automatically sets the disk log quota based on the device.
- C. The FortiAnalyzer can overwrite the oldest logs or stop logging once the disk log quota is met.
- D. The FortiAnalyzer disk log quota is configurable, but has a minimum of 100mb and a maximum based on the reserved system space.

Answer: CD

NEW QUESTION 76

Refer to the exhibit.

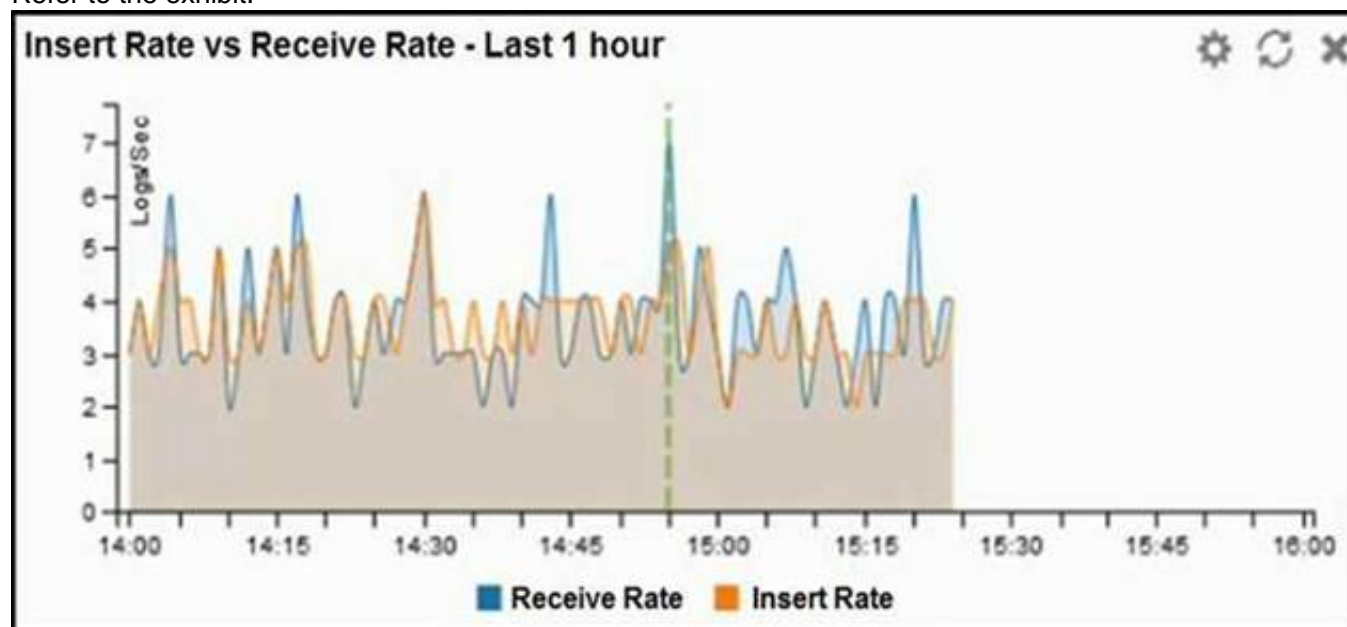

What does the data point at 14:55 tell you?

- A. The received rate is almost at its maximum for this device
- B. The sqlplugind daemon is behind in log indexing by two logs
- C. Logs are being dropped
- D. Raw logs are reaching FortiAnalyzer faster than they can be indexed

Answer: D

NEW QUESTION 79

Which FortiAnalyzer feature allows you to retrieve the archived logs matching a specific timeframe from another FortiAnalyzer device?

- A. Log upload
- B. Indicators of Compromise
- C. Log forwarding an aggregation mode
- D. Log fetching

Answer: D

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/651442/fetcher-management>

NEW QUESTION 84

Which two of the following must you configure on FortiAnalyzer to email a FortiAnalyzer report externally? (Choose two.)


- A. Mail server
- B. Output profile
- C. SFTP server
- D. Report scheduling

Answer: AB

NEW QUESTION 86

Refer to the exhibits.

Event	Event Status	Event Type	Count	Severity	First Occurrence	Last Update	Handler	Tags
> MS.IIS.bdir.HTR.Information.Disclosure (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> PHPURL.Code.Injection (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> 91.189.92.18 (1)	Mitigated	SSL	5	Low	2 hours ago	2 hours ago	Default-Risky-Destination-Detection-By-Threat	Risky SSL
> HTTP.RequestURL.Directory.Traversal (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> Apache.Expect.Header.XSS (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
~ 10.0.1.10 (7)							Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion MS.IIS.bdir.HTR.Informati...	Mitigated	IPS	2	Medium	2021-12-01 21:32:31	2021-12-01 21:32:41	Default-Risky-Destination-Detection-By-Endpoint	Risky SSL
Internal intrusion PHPURL.Code.Injection bl...	Mitigated	IPS	2	Medium	2021-12-01 21:32:11	2021-12-01 21:32:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Insecure-SSL connection blocked	Mitigated	SSL	5	Low	2021-12-01 21:32:01	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.RequestURL.Direct...	Mitigated	IPS	2	Medium	2021-12-01 21:31:51	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Apache.Expect.Header.XS...	Mitigated	IPS	2	Medium	2021-12-01 21:31:31	2021-12-01 21:31:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
~ 10.200.1.254 (6)								
Internal intrusion MS.IIS.bdir.HTR.Informati...	Mitigated	IPS	2	Medium	2021-12-01 21:32:31	2021-12-01 21:32:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion PHPURL.Code.Injection bl...	Mitigated	IPS	2	Medium	2021-12-01 21:32:11	2021-12-01 21:32:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.RequestURL.Direct...	Mitigated	IPS	2	Medium	2021-12-01 21:31:51	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Apache.Expect.Header.XS...	Mitigated	IPS	2	Medium	2021-12-01 21:31:31	2021-12-01 21:31:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.Password.Access blocke...	Mitigated	IPS	2	Medium	2021-12-01 21:31:11	2021-12-01 21:31:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Nikto.Web-Scanner detect...	Unmitigated	IPS	21	High	2021-12-01 21:31:11	2021-12-01 21:32:36	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature

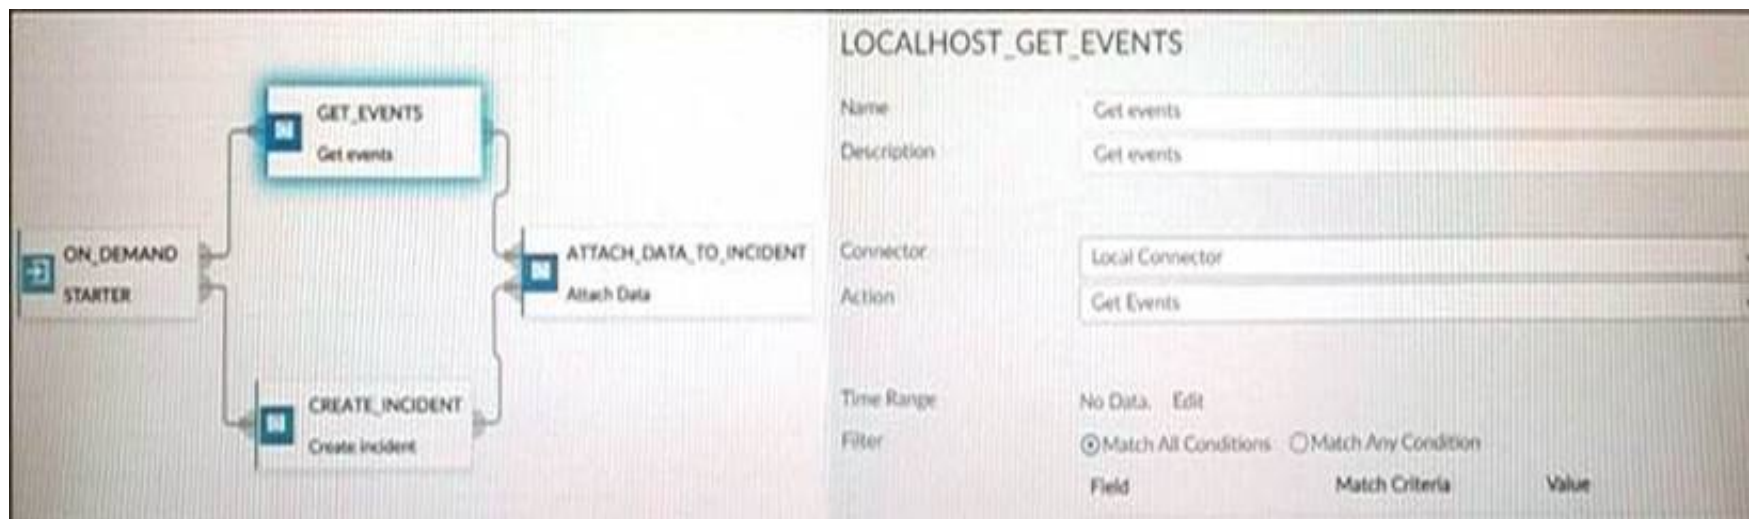

How many events will be added to the incident created after running this playbook?

- A. Ten events will be added.
- B. No events will be added.
- C. Five events will be added.
- D. Thirteen events will be added.

Answer: A

NEW QUESTION 89

Which log will generate an event with the status Contained?

- A. An IPS log with action=pass.
- B. A WebFilter log with action=dropped.
- C. An AV log with action=quarantine.
- D. An AppControl log with action=blocked.

Answer: C

NEW QUESTION 91

Why must you wait for several minutes before you run a playbook that you just created?

- A. FortiAnalyzer needs that time to parse the new playbook.
- B. FortiAnalyzer needs that time to back up the current playbooks.
- C. FortiAnalyzer needs that time to ensure there are no other playbooks running.
- D. FortiAnalyzer needs that time to debug the new playbook.

Answer: A

NEW QUESTION 92

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

NSE5_FAZ-7.2 Practice Exam Features:

- * NSE5_FAZ-7.2 Questions and Answers Updated Frequently
- * NSE5_FAZ-7.2 Practice Questions Verified by Expert Senior Certified Staff
- * NSE5_FAZ-7.2 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE5_FAZ-7.2 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The NSE5_FAZ-7.2 Practice Test Here](#)