

Fortinet

Exam Questions NSE5_FAZ-7.0

Fortinet NSE 5 - FortiAnalyzer 7.0



NEW QUESTION 1

Which SQL query is in the correct order to query the database in the FortiAnalyzer?

- A. SELECT devid FROM Slog GROUP BY devid WHERE * user' =* USERI'
- B. SELECT devid WHERE 'u3er'='USERI' FROM \$ log GROUP BY devid
- C. SELECT devid FROM Slog- WHERE *user' = ' USERI' GROUP BY devid
- D. FROM Slog WHERE 'user* =' USERI' SELECT devid GROUP BY devid

Answer: C

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 259: The main clauses FortiAnalyzer reports use are as follows:

- FROM
- WHERE
- GROUP BY
- ORDER BY
- LIMIT
- OFFSET

Accordingly, following the SELECT keyword, the statement must be followed by one or more clauses in the order in which they appear in the table shown on this slide.

NEW QUESTION 2

Which statements are true of Administrative Domains (ADOMs) in FortiAnalyzer? (Choose two.)

- A. ADOMs are enabled by default.
- B. ADOMs constrain other administrator's access privileges to a subset of devices in the device list.
- C. Once enabled, the Device Manager, FortiView, Event Management, and Reports tab display per ADOM.
- D. All administrators can create ADOMs--not just the admin administrator.

Answer: BC

NEW QUESTION 3

What must you consider when using log fetching? (Choose two.)

- A. The fetch client can retrieve logs from devices that are not added to its local Device Manager
- B. You can use filters to include only logs from a single device.
- C. The fetching profile must include a user with the Super_User profile.
- D. The archive logs retrieved from the server become archive logs in the client.

Answer: BC

NEW QUESTION 4

What are two of the key features of FortiAnalyzer? (Choose two.)

- A. Centralized log repository
- B. Cloud-based management
- C. Reports
- D. Virtual domains (VDOMs)

Answer: AC

NEW QUESTION 5

A rogue administrator was accessing FortiAnalyzer without permission, and you are tasked to see what activity was performed by that rogue administrator on FortiAnalyzer.

What can you do on FortiAnalyzer to accomplish this?

- A. Click FortiView and generate a report for that administrator.
- B. Click Task Monitor and view the tasks performed by that administrator.
- C. Click Log View and generate a report for that administrator.
- D. View the tasks performed by the rogue administrator in Fabric View.

Answer: B

NEW QUESTION 6

What is the purpose of using prefilters when configuring event handlers?

- A. They limit which logs are checked for matches by the other filters.
- B. They can filter the logs before they are processed by FortiAnalyzer
- C. They download new filters to be used in event handlers.
- D. They are common filters applied simultaneously to all event handlers.

Answer: A

NEW QUESTION 7

What are offline logs on FortiAnalyzer?

- A. Compressed logs, which are also known as archive logs, are considered to be offline logs.
- B. When you restart FortiAnalyzer
- C. all stored logs are considered to be offline logs.
- D. Logs that are indexed and stored in the SQL database.
- E. Logs that are collected from offline devices after they boot up.

Answer: A

NEW QUESTION 8

What statements are true regarding the "store and upload" log transfer option between FortiAnalyzer and FortiGate? (Choose three.)

- A. All FortiGates can send logs to FortiAnalyzer using the store and upload option.
- B. Only FortiGate models with hard disks can send logs to FortiAnalyzer using the store and upload option.
- C. Both secure communications methods (SSL and IPsec) allow the store and upload option.
- D. Disk logging is enabled on the FortiGate through the CLI only.
- E. Disk logging is enabled by default on the FortiGate.

Answer: BCD

NEW QUESTION 9

FortiAnalyzer centralizes which functions? (Choose three)

- A. Network analysis
- B. Graphical reporting
- C. Content archiving / data mining
- D. Vulnerability assessment
- E. Security log analysis / forensics

Answer: BCE

NEW QUESTION 10

For which two purposes would you use the command set log checksum? (Choose two.)

- A. To help protect against man-in-the-middle attacks during log upload from FortiAnalyzer to an SFTP server
- B. To prevent log modification or tampering
- C. To encrypt log communications
- D. To send an identical set of logs to a second logging server

Answer: AB

Explanation:

To prevent logs from being tampered with while in storage, you can add a log checksum using the config system global command. You can configure FortiAnalyzer to record a log file hash value, timestamp, and authentication code when the log is rolled and archived and when the log is uploaded (if that feature is enabled). This can also help against man-in-the-middle only for the transmission from FortiAnalyzer to an SSH File Transfer Protocol (SFTP) server during log upload.
FortiAnalyzer_7.0_Study_Guide-Online page 149

NEW QUESTION 10


Which log type does the FortiAnalyzer indicators of compromise feature use to identify infected hosts?

- A. Antivirus logs
- B. Web filter logs
- C. IPS logs
- D. Application control logs

Answer: B

NEW QUESTION 11

Refer to the exhibit.

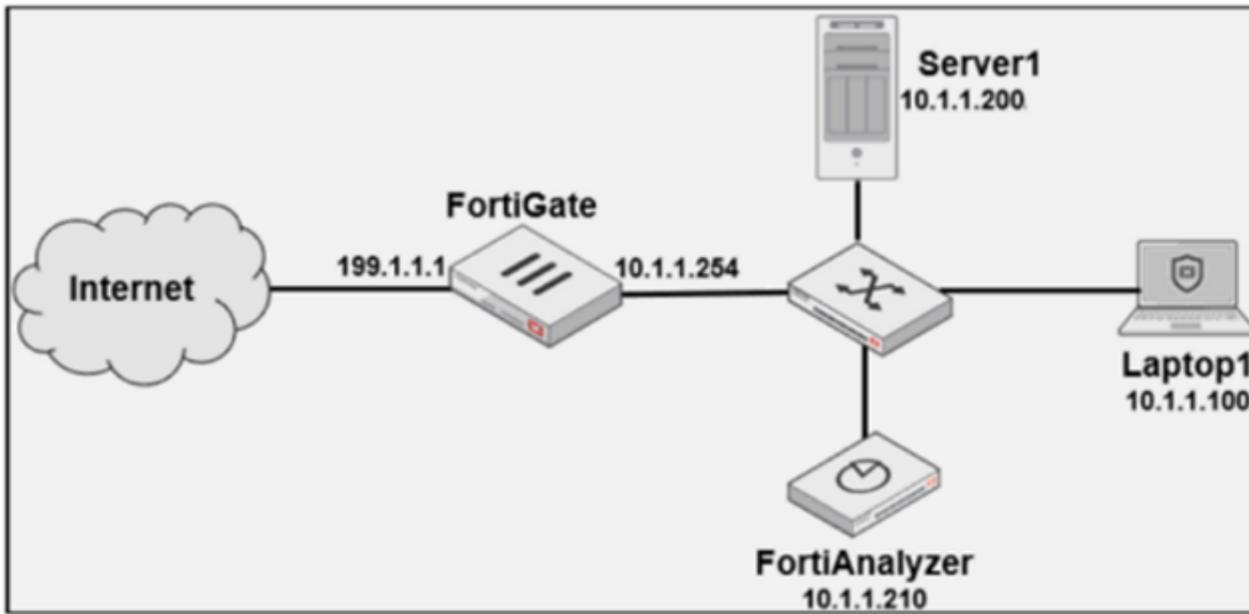

Laptop1 is used by several administrators to manage FortiAnalyzer. You want to configure a generic text filter that matches all login attempts to the web interface generated by any user other than "admin", and coming from Laptop1. Which filter will achieve the desired result?

- A. operation-login & dstip==10.1.1.210 & user!=admin
- B. operation-login & srcip==10.1.1.100 & dstip==10.1.1.210 & user==admin
- C. operation-login & performed_on=="GUI(10.1.1.210)" & user!=admin
- D. operation-login & performed_on=="GUI(10.1.1.100)" & user!=admin

Answer: D

NEW QUESTION 14

An administrator has moved FortiGate A from the root ADOM to ADOM1. Which two statements are true regarding logs? (Choose two.)

- A. Analytics logs will be moved to ADOM1 from the root ADOM automatically.
- B. Archived logs will be moved to ADOM1 from the root ADOM automatically.
- C. Logs will be presented in both ADOMs immediately after the move.
- D. Analytics logs will be moved to ADOM1 from the root ADOM after you rebuild the ADOM1 SQL database.

Answer: BD

NEW QUESTION 19

If a hard disk fails on a FortiAnalyzer that supports software RAID, what should you do to bring the FortiAnalyzer back to functioning normally, without losing data?

- A. Hot swap the disk
- B. Replace the disk and rebuild the RAID manually
- C. Take no action if the RAID level supports a failed disk
- D. Shut down FortiAnalyzer and replace the disk

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD46446#:~:text=On%20FortiAnalyzer%2FFortiMana> If a hard disk on a FortiAnalyzer unit fails, it must be replaced. On FortiAnalyzer devices that support hardware RAID, the hard disk can be replaced while the unit is still running – known as hot swapping. On FortiAnalyzer units with software RAID, the device must be shutdown prior to exchanging the hard disk.

NEW QUESTION 24

How can you configure FortiAnalyzer to permit administrator logins from only specific locations?

- A. Use static routes
- B. Use administrative profiles
- C. Use trusted hosts
- D. Use secure protocols

Answer: C

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/186508/trusted-hosts>

NEW QUESTION 25

Which statement about sending notifications with incident updates is true?

- A. Notifications can be sent only when an incident is created or deleted.
- B. You must configure an output profile to send notifications by email.
- C. Each incident can send notifications to a single external platform.
- D. Each connector used can have different notification settings.

Answer: D

NEW QUESTION 30

Which two statements are true regarding the outbreak detection service? (Choose two.)

- A. New alerts are received by email.
- B. Outbreak alerts are available on the root ADOM only.
- C. An additional license is required.
- D. It automatically downloads new event handlers and reports.

Answer: CD

NEW QUESTION 31

By default, what happens when a log file reaches its maximum file size?

- A. FortiAnalyzer overwrites the log files.
- B. FortiAnalyzer stops logging.
- C. FortiAnalyzer rolls the active log by renaming the file.
- D. FortiAnalyzer forwards logs to syslog.

Answer: C

NEW QUESTION 33

Which two methods are the most common methods to control and restrict administrative access on FortiAnalyzer? (Choose two.)

- A. Virtual domains
- B. Administrative access profiles
- C. Trusted hosts
- D. Security Fabric

Answer: BC

NEW QUESTION 35

What are two advantages of setting up fabric ADOM? (Choose two.)

- A. It can be used for fast data processing and log correlation
- B. It can be used to facilitate communication between devices in same Security Fabric
- C. It can include all Fortinet devices that are part of the same Security Fabric
- D. It can include only FortiGate devices that are part of the same Security Fabric

Answer: AC

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/448471/creating-a-security-fabric-a>

NEW QUESTION 38

What is the best approach to handle a hard disk failure on a FortiAnalyzer that supports hardware RAID?

- A. Hot swap the disk.
- B. There is no need to do anything because the disk will self-recover.
- C. Run execute format disk to format and restart the FortiAnalyzer device.
- D. Shut down FortiAnalyzer and replace the disk

Answer: A

Explanation:

https://help.fortinet.com/fa/faz50hlp/56/5-6-2/FMG-FAZ/0700_RAID/0800_Swapping%20Disks.htm#:~:text=If

NEW QUESTION 43

Which two statements are true regarding ADOM modes? (Choose two.)

- A. You can only change ADOM modes through CLI.
- B. In normal mode, the disk quota of the ADOM is fixed and cannot be modified, but in advance mode, the disk quota of the ADOM is flexible because new devices are added to the ADOM.
- C. In an advanced mode ADO
- D. you can assign FortiGate VDOMs from a single FortiGate device to multiple FortiAnalyzer ADOMs.
- E. Normal mode is the default ADOM mode.

Answer: CD

NEW QUESTION 48

What can the CLI command # diagnose test application oftpd 3 help you to determine?

- A. What devices and IP addresses are connecting to FortiAnalyzer
- B. What logs, if any, are reaching FortiAnalyzer
- C. What ADOMs are enabled and configured
- D. What devices are registered and unregistered

Answer: A

Explanation:

https://docs.fortinet.com/document/fortianalyzer/6.2.5/cli-reference/395556/test#test_application

NEW QUESTION 49

Which two statements are true regardless of initial Logs sync and Log Data Sync for HA on FortiAnalyzer?

- A. By default, Log Data Sync is disabled on all backup devices.
- B. Log Data Sync provides real-time log synchronization to all backup devices.
- C. With initial Logs Sync, when you add a unit to an HA cluster, the primary device synchronizes its logs with the backup device.
- D. When Log Data Sync is turned on, the backup device will reboot and then rebuild the log database with the synchronized logs.

Answer: CD

NEW QUESTION 52

Which statement about the FortiSOAR management extension is correct?

- A. It requires a FortiManager configured to manage FortiGate
- B. It requires a dedicated FortiSOAR device or VM.
- C. It does not include a limited trial by default.
- D. It runs as a Docker container on FortiAnalyzer

Answer: D

NEW QUESTION 57

Logs are being deleted from one of your ADOMs earlier than the configured setting for archiving in your data policy. What is the most likely problem?

- A. The total disk space is insufficient and you need to add another disk.
- B. CPU resources are too high.
- C. The ADOM disk quota is set too low based on log rates.
- D. Logs in that ADOM are being forwarded in real-time to another FortiAnalyzer device.

Answer: C


Explanation:

https://help.fortinet.com/fmgr/50hlp/56/5-6-1/FMG_FAZ/1100_Storage/0017_Deleted%20device%20logs.htm

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/87802/automatic-deletion>

NEW QUESTION 62

Refer to the exhibit.

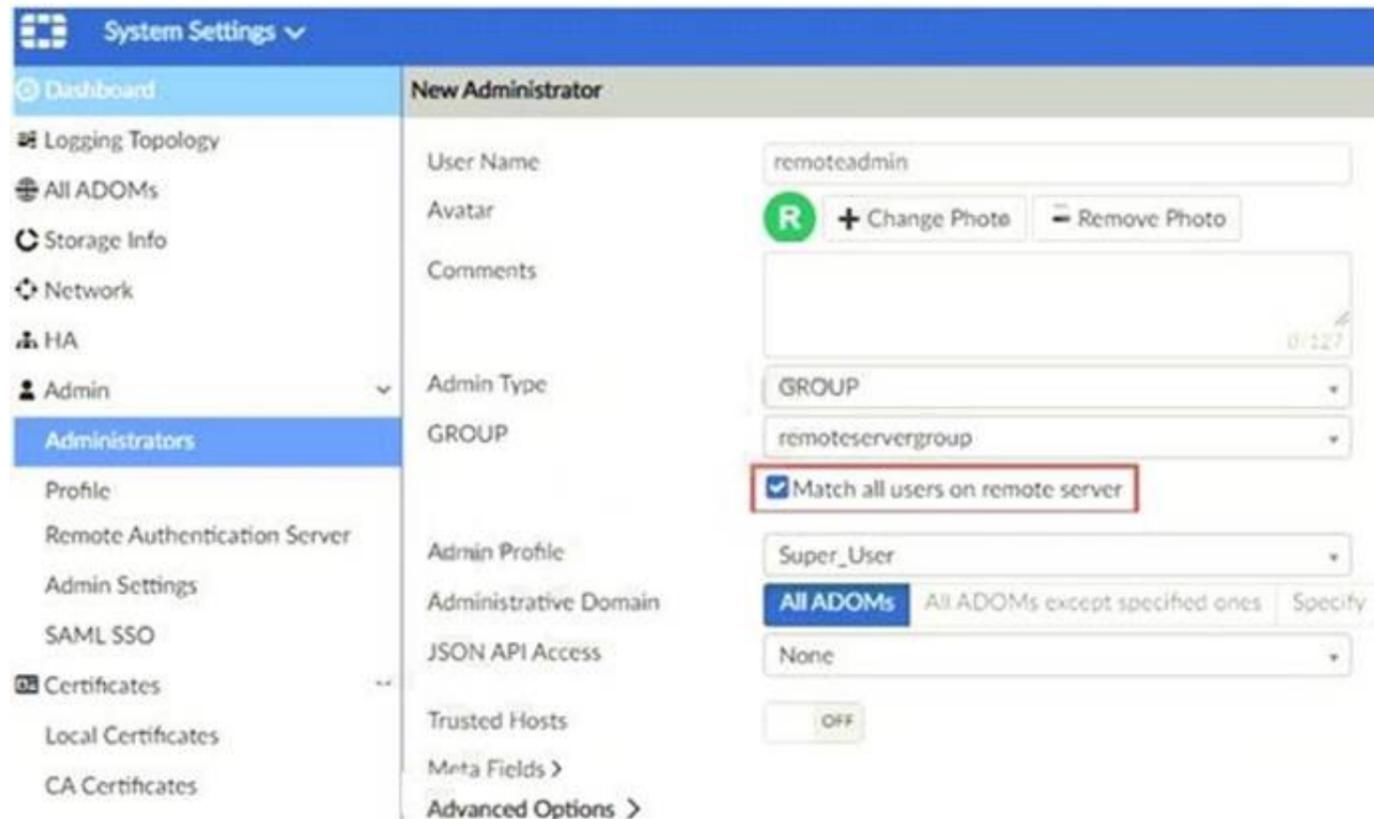

The exhibit shows “remoteservergroup” is an authentication server group with LDAP and RADIUS servers. Which two statements express the significance of enabling “Match all users on remote server” when configuring a new administrator? (Choose two.)

- A. It creates a wildcard administrator using LDAP and RADIUS servers.
- B. Administrator can log in to FortiAnalyzer using their credentials on remote servers LDAP and RADIUS.
- C. Use remoteadmin from LDAP and RADIUS servers will be able to log in to FortiAnalyzer at anytime.
- D. It allows administrators to use two-factor authentication.

Answer: AB

NEW QUESTION 63

Which two actions should an administrator take to view Compromised Hosts on FortiAnalyzer? (Choose two.)

- A. Enable web filtering in firewall policies on FortiGate devices, and make sure these logs are sent to FortiAnalyzer.
- B. Make sure all endpoints are reachable by FortiAnalyzer.
- C. Enable device detection on an interface on the FortiGate devices that are connected to the FortiAnalyzer device.
- D. Subscribe FortiAnalyzer to FortiGuard to keep its local threat database up to date.

Answer: AD

Explanation:

In order to configure IOC, you require the following:

- A one-year subscription to IOC. Note that FortiAnalyzer does include an evaluation license, but it is restrictive and only meant to give you an idea of how the feature works.
 - A web filter services subscription on FortiGate device(s)
 - Web filter policies on FortiGate device(s) that send traffic to FortiAnalyzer Compromised Hosts or Indicators of Compromise service (IOC) is a licensed feature.
- To view Compromised Hosts, you must turn on the UTM web filter of FortiGate devices and subscribe your FortiAnalyzer unit to FortiGuard to keep its local threat database synchronized with the FortiGuard threat database. See [Subscribing FortiAnalyzer to FortiGuard](#).

Ref :

<https://docs.fortinet.com/document/fortianalyzer/6.4.0/administration-guide/137635/viewing-compromised-host>

NEW QUESTION 64

Which two statements about log forwarding are true? (Choose two.)

- A. Forwarded logs cannot be filtered to match specific criteria.
- B. Logs are forwarded in real-time only.
- C. The client retains a local copy of the logs after forwarding.
- D. You can use aggregation mode only with another FortiAnalyzer.

Answer: CD

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/420493/modes> <https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/621804/log-forwarding>

NEW QUESTION 65

How can you attach a report to an incident?

- A. By attaching it to an event handler alert
- B. By editing the settings of the desired report
- C. From the properties of an existing incident
- D. Saving it in JSON format, and then importing it

Answer: C

NEW QUESTION 68

What remote authentication servers can you configure to validate your FortiAnalyzer administrator logons? (Choose three)

- A. RADIUS
- B. Local
- C. LDAP
- D. PKI
- E. TACACS+

Answer: ACE

NEW QUESTION 70

What can you do on FortiAnalyzer to restrict administrative access from specific locations?

- A. Configure trusted hosts for that administrator.
- B. Enable geo-location services on accessible interface.
- C. Configure two-factor authentication with a remote RADIUS server.
- D. Configure an ADOM for respective location.

Answer: A

NEW QUESTION 73

What is the purpose of a dataset query in FortiAnalyzer?

- A. It sorts log data into tables
- B. It extracts the database schema
- C. It retrieves log data from the database
- D. It injects log data into the database

Answer: C

NEW QUESTION 74

Logs are being deleted from one of the ADOMs earlier than the configured setting for archiving in the data policy. What is the most likely problem?

- A. CPU resources are too high
- B. Logs in that ADOM are being forwarded, in real-time, to another FortiAnalyzer device
- C. The total disk space is insufficient and you need to add other disk
- D. The ADOM disk quota is set too low, based on log rates

Answer: D

NEW QUESTION 79

Which statement is true about sending notifications with incident updates?

- A. Notifications can be sent only when an incident is updated or deleted.
- B. If you use multiple fabric connectors, all connectors must have the same notification settings
- C. Notifications can be sent only by email.
- D. You can send notifications to multiple external platforms

Answer: D

Explanation:

You can add more than one fabric connector, each with the same or different notification settings. The receiving side of the connector must be configured for the notifications to be sent successfully.

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 34: Fabric connectors also enable FortiAnalyzer to send notifications to ITSM platforms when a new incident is created or for any subsequent updates.

NEW QUESTION 81

Which statement is true regarding Macros on FortiAnalyzer?

- A. Macros are ADOM specific and each ADOM will have unique macros relevant to that ADOM.
- B. Macros are supported only on the FortiGate ADOM.
- C. Macros are useful in generating excel log files automatically based on the reports settings.
- D. Macros are predefined templates for reports and cannot be customized.

Answer: A

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 283: Note that macros are ADOM-specific and supported in FortiGate and FortiCarrier ADOMs only.

NEW QUESTION 86

After you have moved a registered logging device out of one ADOM and into a new ADOM, what is the purpose of running the following CLI command?
execute sql-local rebuild-adom <new-ADOM-name>

- A. To reset the disk quota enforcement to default
- B. To remove the analytics logs of the device from the old database
- C. To migrate the archive logs to the new ADOM
- D. To populate the new ADOM with analytical logs for the moved device, so you can run reports

Answer: D

Explanation:

- Are the device's analytics logs required for reports in the *new* ADOM? If so, rebuild the new ADOM database:

```
# exe sql-local rebuild-adom <new-ADOM-name>
```

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 128: Are the device analytics logs required for reports in the new ADOM? If so, rebuild the new ADOM database

NEW QUESTION 91

What is the purpose of employing RAID with FortiAnalyzer?

- A. To introduce redundancy to your log data
- B. To provide data separation between ADOMs
- C. To separate analytical and archive data
- D. To back up your logs

Answer: A

Explanation:

[https://en.wikipedia.org/wiki/RAID#:~:text=RAID%20\(%22Redundant%20Array%20of%20Inexpensive,%2C%](https://en.wikipedia.org/wiki/RAID#:~:text=RAID%20(%22Redundant%20Array%20of%20Inexpensive,%2C%)

NEW QUESTION 95

Which two statements are true regarding log fetching on FortiAnalyzer? (Choose two.)

- A. A FortiAnalyzer device can perform either the fetch server or client role, and it can perform two roles at the same time with the same FortiAnalyzer devices at the other end.
- B. Log fetching can be done only on two FortiAnalyzer devices that are running the same firmware version.
- C. Log fetching allows the administrator to fetch analytics logs from another FortiAnalyzer for redundancy.

D. Log fetching allows the administrator to run queries and reports against historical data by retrieving archived logs from one FortiAnalyzer device and sending them to another FortiAnalyzer device.

Answer: BD

NEW QUESTION 96

How does FortiAnalyzer retrieve specific log data from the database?

- A. SQL FROM statement
- B. SQL GET statement
- C. SQL SELECT statement
- D. SQL EXTRACT statement


Answer: A

Explanation:

<https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/137bb60e-ff37-11e8-8524-f8bc1258b8>

NEW QUESTION 100

Refer to the exhibit.

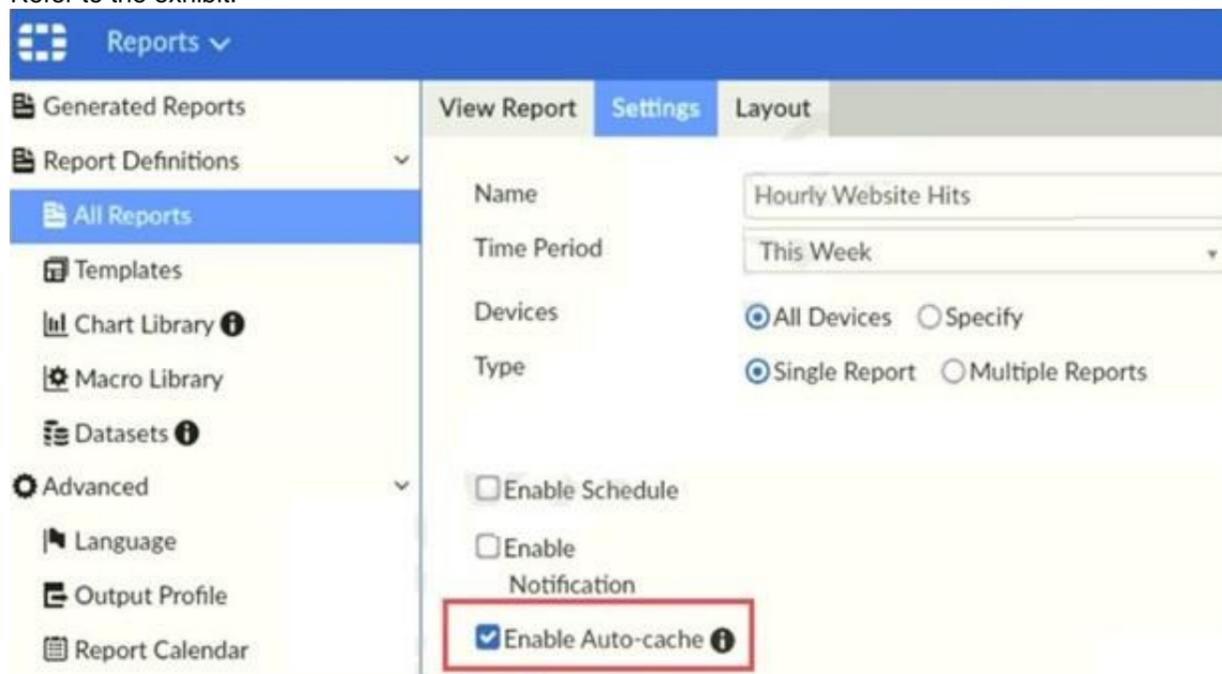

Which two statements are true regarding enabling auto-cache on FortiAnalyzer? (Choose two.)

- A. Report size will be optimized to conserve disk space on FortiAnalyzer.
- B. Reports will be cached in the memory.
- C. This feature is automatically enabled for scheduled reports.
- D. Enabling auto-cache reduces report generation time for reports that require a long time to assemble datasets.

Answer: CD

Explanation:

"Enable auto-cache in the report settings to boost the reporting performance and reduce report generation time. Scheduled reports have auto-cache enabled already."

FortiAnalyzer_7.0_Study_Guide-Online page 306

NEW QUESTION 105

You are using RAID with a FortiAnalyzer that supports software RAID, and one of the hard disks on FortiAnalyzer has failed. What is the recommended method to replace the disk?

- A. Shut down FortiAnalyzer and then replace the disk
- B. Downgrade your RAID level, replace the disk, and then upgrade your RAID level
- C. Clear all RAID alarms and replace the disk while FortiAnalyzer is still running
- D. Perform a hot swap

Answer: A

Explanation:

supports hot swapping on hardware RAID only, so it is recommended that on FortiAnalyzer devices with software RAID you should shutdown FortiAnalyzer prior to exchanging the hard disk.

<https://community.fortinet.com/t5/FortiAnalyzer/Technical-Note-How-to-swap-Hard-Disk-on-FortiAnalyzer/ta->

NEW QUESTION 106

On the RAID management page, the disk status is listed as Initializing. What does the status Initializing indicate about what the FortiAnalyzer is currently doing?

- A. FortiAnalyzer is ensuring that the parity data of a redundant drive is valid
- B. FortiAnalyzer is writing data to a newly added hard drive to restore it to an optimal state

- C. FortiAnalyzer is writing to all of its hard drives to make the array fault tolerant
- D. FortiAnalyzer is functioning normally

Answer: C

NEW QUESTION 110

Which two settings must you configure on FortiAnalyzer to allow non-local administrators to authenticate to FortiAnalyzer with any user account in a single LDAP group? (Choose two.)

- A. A local wildcard administrator account
- B. A remote LDAP server
- C. A trusted host profile that restricts access to the LDAP group
- D. An administrator group

Answer: AB

NEW QUESTION 114

Which statement about the FortiSIEM management extension is correct?

- A. Allows you to manage the entire life cycle of a threat or breach.
- B. Its use of the available disk space is capped at 50%.
- C. It requires a licensed FortiSIEM supervisor.
- D. It can be installed as a dedicated VM.

Answer: A

NEW QUESTION 118

Which two elements are contained in a system backup created on FortiAnalyzer? (Choose two.)

- A. System information
- B. Logs from registered devices
- C. Report information
- D. Database snapshot

Answer: AC

Explanation:

What does the System Configuration backup include?

System information, such as the device IP address and administrative user information. Device list, such as any devices you configured to allow log access.

Report information, such as any configured report settings, as well as all your custom report details. These are not the actual reports.

FortiAnalyzer_7.0_Study_Guide-Online pag. 29

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 29: What does the System Configuration backup include?

- System information, such as the device IP address and administrative user information
- Device list, such as any devices you configured to allow log access
- Report information, such as any configured report settings, as well as all your custom report details. These are not the actual reports.

NEW QUESTION 120

The admin administrator is failing to register a FortiClient EMS on the FortiAnalyzer device. What can be the reason for this failure?

- A. FortiAnalyzer is in an HA cluster.
- B. ADOM mode should be set to advanced, in order to register the FortiClient EMS device.
- C. ADOMs are not enabled on FortiAnalyzer.
- D. A separate license is required on FortiAnalyzer in order to register the FortiClient EMS device.

Answer: C

NEW QUESTION 125

Refer to the exhibit.

<pre> FortiAnalyzer1# get system status Platform Type : FAZVM64-KVM Platform Full Name : FortiAnalyzer-VM64-KVM Version : v7.2.1-build1215 220809 (GA) Serial Number : FAZ-VM0000065040 BIOS version : 04000002 Hostname : FortiAnalyzer1 Max Number of Admin Domains : 5 Admin Domain Configuration : Enabled FIPS Mode : Disabled HA Mode : Stand Alone Branch Point : 1215 Release Version Information : GA Time Zone : (GMT-8:00) Pacific Time (US & Canada) Disk Usage : Free 43.60GB, Total 58.80GB File System : Ext4 License Status : Valid FortiAnalyzer1# get system global adom-mode : normal adom-select : enable adom-status : enable console-output : standard country-flag : enable enc-algorithm : high ha-member-auto-grouping : enable hostname : FortiAnalyzer2 log-checksum : md5 log-forward-cache-size : 5 log-mode : analyzer longitude : (null) max-aggregation-tasks : 0 max-running-reports : 1 oftp-ssl-protocol : tlsv1.2 ssl-low-encryption : disable ssl-protocol : tlsv1.3 tlsv1.2 : 2000 : tlsv1.3 tlsv1.2 </pre>	<pre> FortiAnalyzer3# get system status Platform Type : FAZVM64-KVM Platform Full Name : FortiAnalyzer-VM64-KVM Version : v7.2.1-build1215 220809 (GA) Serial Number : FAZ-VM0000065042 BIOS version : 04000002 Hostname : FortiAnalyzer3 Max Number of Admin Domains : 5 Admin Domain Configuration : Enabled FIPS Mode : Disabled HA Mode : Stand Alone Branch Point : 1215 Release Version Information : GA Time Zone : (GMT-8:00) Pacific Time (US & Canada) Disk Usage : Free 12.98GB, Total 79.80GB File System : Ext4 License Status : Valid FortiAnalyzer3# get system global adom-mode : normal adom-select : enable adom-status : enable console-output : standard country-flag : enable enc-algorithm : high ha-member-auto-grouping : enable hostname : FortiAnalyzer3 log-checksum : md5 log-forward-cache-size : 5 log-mode : analyzer longitude : (null) max-aggregation-tasks : 0 max-running-reports : 5 oftp-ssl-protocol : tlsv1.2 ssl-low-encryption : disable ssl-protocol : tlsv1.3 tlsv1.2 : 2000 : tlsv1.3 tlsv1.2 web-service-protocol : tlsv1.3 tlsv1.2 </pre>
--	---

Based on the partial outputs displayed, which devices can be members of a FortiAnalyzer Fabric?

- A. FortiAnalyzer1 and FortiAnalyzer3
- B. FortiAnalyzer1 and FortiAnalyzer2
- C. All devices listed can be members
- D. FortiAnalyzer2 and FortiAnalyzer3

Answer: C

NEW QUESTION 129

What are two effects of enabling auto-cache in a FortiAnalyzer report? (Choose two.)

- A. The size of newly generated reports is optimized to conserve disk space.
- B. FortiAnalyzer local cache is used to store generated reports.
- C. When new logs are received, the hard-cache data is updated automatically.
- D. The generation time for reports is decreased.

Answer: CD

NEW QUESTION 132

How do you restrict an administrator's access to a subset of your organization's ADOMs?

- A. Set the ADOM mode to Advanced
- B. Assign the ADOMs to the administrator's account
- C. Configure trusted hosts
- D. Assign the default Super_User administrator profile

Answer: B

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/717578/assigning-administrators-to>

NEW QUESTION 135

What statements are true regarding FortiAnalyzer's treatment of high availability (HA) clusters? (Choose two)

- A. FortiAnalyzer distinguishes different devices by their serial number.
- B. FortiAnalyzer receives logs from all devices in a cluster.
- C. FortiAnalyzer receives logs only from the primary device in the cluster.
- D. FortiAnalyzer only needs to know the serial number of the primary device in the cluster-it automatically discovers the other devices.

Answer: AB

NEW QUESTION 138

Which daemon is responsible for enforcing the log file size?

- A. sqlplugind
- B. logfiled
- C. miglogd
- D. ofrpd

Answer: B

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 121: The logfiled process enforces the log file size and is also responsible for disk quota enforcement by monitoring the other processes.

NEW QUESTION 141

When you perform a system backup, what does the backup configuration contain? (Choose two.)

- A. Generated reports
- B. Device list
- C. Authorized devices logs
- D. System information

Answer: BD

Explanation:

https://help.fortinet.com/fa/cli-ohl/5-6-5/Content/Document/1400_execute/backup.htm

NEW QUESTION 142

Refer to the exhibit.

Event	Event Status	Event Type	Count	Severity
✓ 151.101.54.62 (1) Insecure SSL Connection blocked from 10.0.3.20	Mitigated	⚙️ SSL	1	● Low

Which statement is correct regarding the event displayed?

- A. The security risk was blocked or dropped.
- B. The security event risk is considered open.
- C. An incident was created from this event.
- D. The risk source is isolated.

Answer: A

Explanation:

Events in FortiAnalyzer will be in one of four statuses. The current status will determine if more actions need to be taken by the security team or not.

The possible statuses are:

Unhandled: The security event risk is not mitigated or contained, so it is considered open. Contained: The risk source is isolated.

Mitigated: The security risk is mitigated by being blocked or dropped. (Blank): Other scenarios.

FortiAnalyzer_7.0_Study_Guide-Online pag. 206

NEW QUESTION 147


Which statements are correct regarding FortiAnalyzer reports? (Choose two)

- A. FortiAnalyzer provides the ability to create custom reports.
- B. FortiAnalyzer allows you to schedule reports to run.
- C. FortiAnalyzer includes pre-defined reports only.
- D. FortiAnalyzer allows reporting for FortiGate devices only.

Answer: AB

NEW QUESTION 151

Refer to the exhibit.

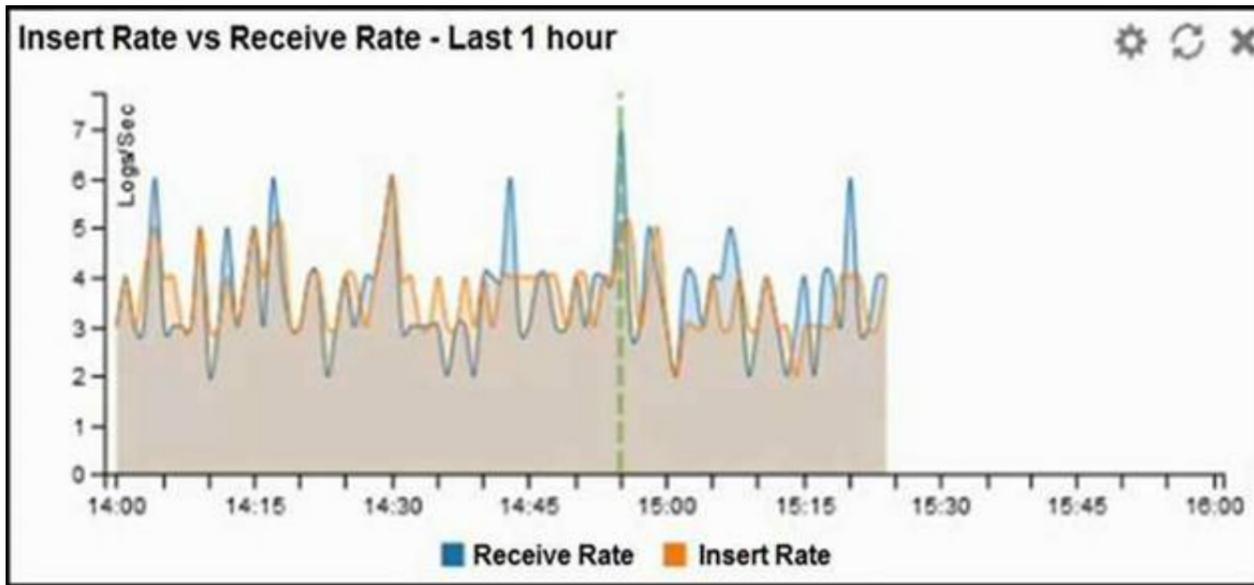

What does the data point at 14:55 tell you?

- A. The received rate is almost at its maximum for this device
- B. The sqlplugind daemon is behind in log indexing by two logs
- C. Logs are being dropped
- D. Raw logs are reaching FortiAnalyzer faster than they can be indexed

Answer: D

NEW QUESTION 152

Which FortiAnalyzer feature allows you to retrieve the archived logs matching a specific timeframe from another FortiAnalyzer device?

- A. Log upload
- B. Indicators of Compromise
- C. Log forwarding an aggregation mode
- D. Log fetching

Answer: D

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/651442/fetcher-management>

NEW QUESTION 153

Refer to the exhibit.



What does the data point at 12:20 indicate?

- A. The performance of FortiAnalyzer is below the baseline.
- B. FortiAnalyzer is using its cache to avoid dropping logs.
- C. The log insert lag time is increasing.
- D. The sqlplugind service is caught up with new logs.

Answer: C

NEW QUESTION 154

Which two statements are correct regarding the export and import of playbooks? (Choose two.)

- A. You can export only one playbook at a time.
- B. You can import a playbook even if there is another one with the same name in the destination.
- C. Playbooks can be exported and imported only within the same FortiAnalyzer.

D. A playbook that was disabled when it was exported, will be disabled when it is imported.

Answer: BD

Explanation:

If the imported playbook has the same name as an existing one, FortiAnalyzer will create a new name that includes a timestamp to avoid conflicts. Playbooks are imported with the same status they had (enabled or disabled) when they were exported. Playbooks set to run automatically should be exported while they are disabled to avoid unintended runs on the destination.

NEW QUESTION 158

An administrator has configured the following settings:

```
config system global
set log-checksum md5-auth
end
```

What is the significance of executing this command?

- A. This command records the log file MD5 hash value.
- B. This command records passwords in log files and encrypts them.
- C. This command encrypts log transfer between FortiAnalyzer and other devices.
- D. This command records the log file MD5 hash value and authentication code.

Answer: D

NEW QUESTION 159

What is the purpose of output variables?

- A. To store playbook execution statistics
- B. To use the output of the previous task as the input of the current task
- C. To display details of the connectors used by a playbook
- D. To save all the task settings when a playbook is exported


Answer: B

Explanation:

FortiAnalyzer_7.0_Study_Guide-Online.pdf page 242: Output variables allow you to use the output from a preceding task as an input to the current task. "Output variables allow you to use the output from a preceding task as an input to the current task." FortiAnalyzer_7.0_Study_Guide-Online page 242

NEW QUESTION 163

View the exhibit:

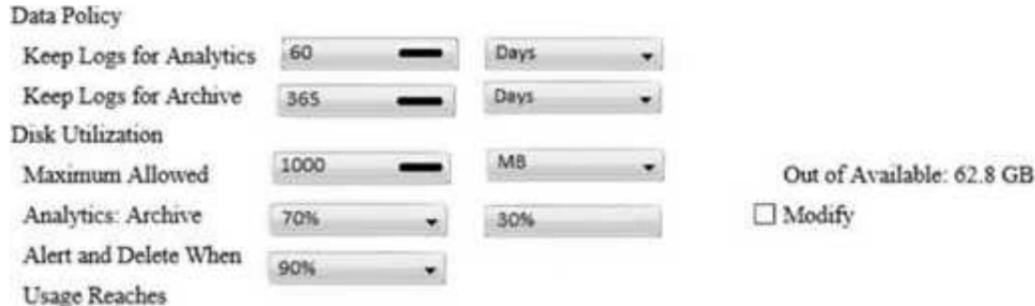

What does the 1000MB maximum for disk utilization refer to?

- A. The disk quota for the FortiAnalyzer model
- B. The disk quota for all devices in the ADOM
- C. The disk quota for each device in the ADOM
- D. The disk quota for the ADOM type

Answer: B

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/743670/configuring-log-storage-pol>

NEW QUESTION 165

In FortiAnalyzer's FormView, source and destination IP addresses from FortiGate devices are not resolving to a hostname. How can you resolve the source and destination IPs, without introducing any additional performance impact to FortiAnalyzer?

- A. Configure local DNS servers on FortiAnalyzer
- B. Resolve IPs on FortiGate
- C. Configure # set resolve-ip enable in the system FortiView settings
- D. Resolve IPs on a per-ADOM basis to reduce delay on FortiView while IPs resolve

Answer: B

NEW QUESTION 170

Which two of the following must you configure on FortiAnalyzer to email a FortiAnalyzer report externally? (Choose two.)


- A. Mail server
- B. Output profile
- C. SFTP server

D. Report scheduling

Answer: AB

NEW QUESTION 173

Refer to the exhibit.

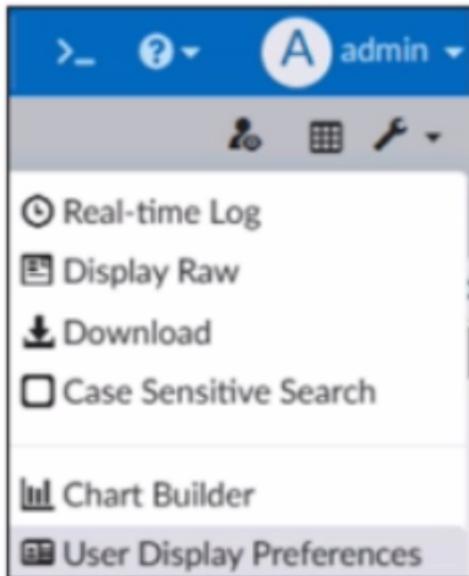

What is the purpose of using the Chart Builder feature on FortiAnalyzer?


- A. To add a new chart under FortiView to be used in new reports
- B. To build a dataset and chart automatically, based on the filtered search results
- C. To add charts directly to generate reports in the current ADOM
- D. To build a chart automatically based on the top 100 log entries

Answer: B

NEW QUESTION 177

Refer to the exhibits.

Event	Event Status	Event Type	Count	Severity	First Occurrence	Last Update	Handler	Tags
> MS.IIS.bdir.HTR.Information.Disclosure (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> PHPURL.Code.Injection (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> 91.189.92.18 (1)	Mitigated	SSL	5	Low	2 hours ago	2 hours ago	Default-Risky-Destination-Detection-By-Threat	Risky SSL
> HTTP.Request.URI.Directory.Traversal (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
> Apache.Expect.Header.XSS (2)	Mitigated	IPS	4	Medium	2 hours ago	2 hours ago	Default-Malicious-Code-Detection-By-Threat	
~10.0.1.10 (7)							Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion MS.IIS.bdir.HTR.Informati...	Mitigated	IPS	2	Medium	2021-12-01 21:32:33	2021-12-01 21:32:41	Default-Risky-Destination-Detection-By-Endpoint	Risky SSL
Internal intrusion PHPURL.Code.Injection bl...	Mitigated	IPS	2	Medium	2021-12-01 21:32:11	2021-12-01 21:32:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Insecure-SSL connection blocked	Mitigated	SSL	5	Low	2021-12-01 21:32:01	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.Request.URI Direct...	Mitigated	IPS	2	Medium	2021-12-01 21:31:51	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Apache.Expect.Header.XS...	Mitigated	IPS	2	Medium	2021-12-01 21:31:31	2021-12-01 21:31:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
~10.200.1.254 (6)								
Internal intrusion MS.IIS.bdir.HTR.Informati...	Mitigated	IPS	2	Medium	2021-12-01 21:32:31	2021-12-01 21:32:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion PHPURL.Code.Injection bl...	Mitigated	IPS	2	Medium	2021-12-01 21:32:11	2021-12-01 21:32:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTTP.Request.URI Direct...	Mitigated	IPS	2	Medium	2021-12-01 21:31:51	2021-12-01 21:32:01	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Apache.Expect.Header.XS...	Mitigated	IPS	2	Medium	2021-12-01 21:31:31	2021-12-01 21:31:41	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion HTPPassword.Access blocke...	Mitigated	IPS	2	Medium	2021-12-01 21:31:11	2021-12-01 21:31:21	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature
Internal intrusion Nikto.Web-Scanner detect...	Unmitigated	IPS	21	High	2021-12-01 21:31:11	2021-12-01 21:32:36	Default-Malicious-Code-Detection-By-Endpoint	Intrusion Signature

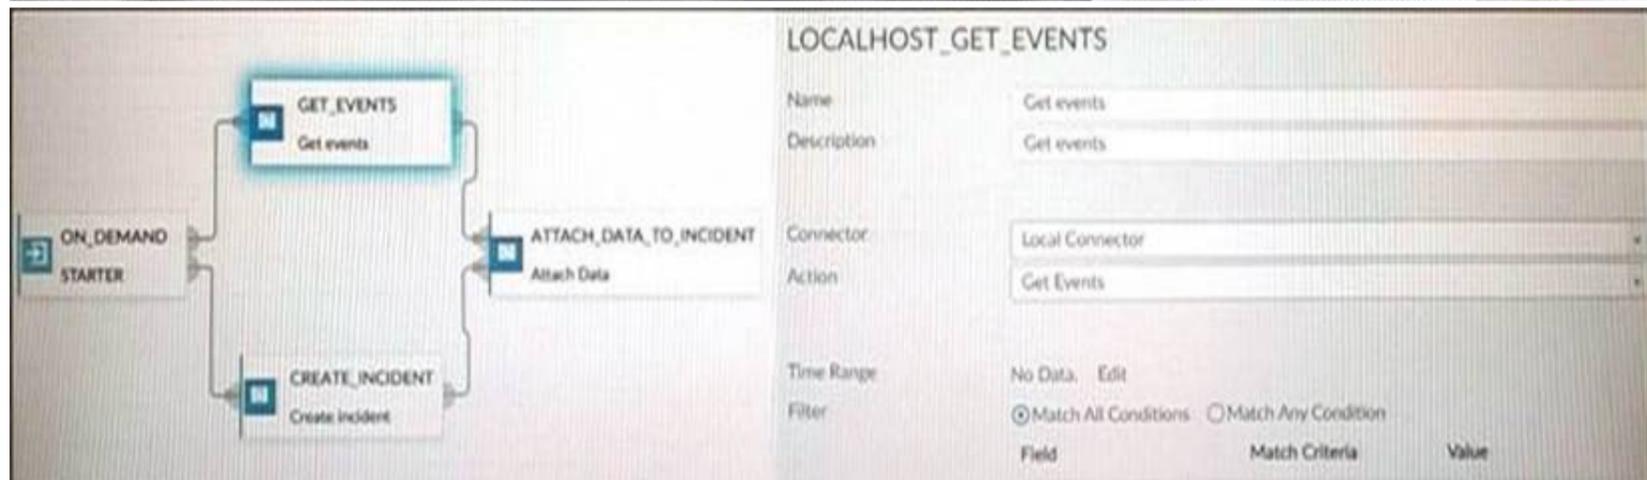

How many events will be added to the incident created after running this playbook?

- A. Ten events will be added.
- B. No events will be added.
- C. Five events will be added.
- D. Thirteen events will be added.

Answer: A

NEW QUESTION 179

What is the purpose of the following CLI command?

```
# configure system global
  set log-checksum md5
end
```

- A. To add a log file checksum
- B. To add the MD's hash value and authentication code
- C. To add a unique tag to each log to prove that it came from this FortiAnalyzer
- D. To encrypt log communications

Answer: A

Explanation:

<https://docs2.fortinet.com/document/fortianalyzer/6.0.3/cli-reference/849211/global>

NEW QUESTION 184

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

NSE5_FAZ-7.0 Practice Exam Features:

- * NSE5_FAZ-7.0 Questions and Answers Updated Frequently
- * NSE5_FAZ-7.0 Practice Questions Verified by Expert Senior Certified Staff
- * NSE5_FAZ-7.0 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE5_FAZ-7.0 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The NSE5_FAZ-7.0 Practice Test Here](#)